

MEASURING INSTRUMENTS

Mitutoyo

DELIVERING
PRACTICAL SOLUTIONS
FOR YOUR PRECISION
MEASUREMENT CHALLENGES

Fowler

QUALITY MEASURING
INSTRUMENTS
& PRECISION TOOLS

Goetz & Schenck

SHAPING THE FUTURE
OF MEASUREMENT

**Vermont
Gage**

GAGES

GENERAL

CALIPERS, PROTRACTORS

HEXAGON
METROLOGY

MEASURING INSTRUMENTS

Pittsburg
ALLEGHANY

GLOBALLY SOURCED
TOOLS PROVIDING A
BALANCE OF QUALITY & PRICE

Huot

DRILL GAGES

Interapid
SWITZERLAND

TEST INDICATORS

TESA


TESA
TECHNOLOGY

MEASURING INSTRUMENTS


Bench Centers.....	563
Blocks, Parallels, & Squares.....	557-559
Bore Gages.....	538-539
Calipers.....	530-535
Combination Square.....	550
Depth Gages.....	527-528
DRO - Digital Read Out.....	563
Gage Blocks.....	560-561
Height Gages.....	536-537
Indicators.....	540-549
Levels.....	551, 559
Micrometers.....	517-529
Microscopes.....	551
Pin & Ring Gages.....	515-516
Protractors, Rulers, & Gages.....	551-555
Stands.....	529, 561-562
Thickness Gages.....	549
Thread Plug Gages.....	510-511, 513-514
Thread Ring Gages.....	512-514

Thread Plug Gages - UNC, UNF, UN & UNEF

Right Hand – Class X Tolerance



Set includes one each:
Go & No Go member with handle



SHORT FORM CERTIFICATION - N/C — LONG FORM - CERTIFIED TO ACTUAL DIMENSIONS - ADDITIONAL CHARGE


SIZE	MEMBERS					HANDLES			SETS		
	UNC UNF UNEF	GO CLASS 1-2-3 1B-2B-3B	NO GO CLASS 2B	NO GO CLASS 3B	PRICE EACH	TAPER LOCK HANDLE SIZE	HANDLE ORDER NO.	PRICE EACH	CLASS 2B SET W/ HANDLE	CLASS 3B SET W/ HANDLE	PRICE EACH SET
0-80	UNC	4000-519	4000-542	4000-536	\$46.85	000	2591-698	\$9.00	4060-005	4060-006	\$ 106.45
1-64	UNC	4000-629	4000-655	4000-648	46.85	000	2591-698	9.00	4060-010	4060-011	106.45
1-72	UNF	4000-640	4000-665	4000-659	46.85	000	2591-698	9.00	4060-015	4060-016	106.45
2-56	UNC	4000-744	4000-772	4000-765	46.85	000	2591-698	9.00	4060-020	4060-021	106.45
2-64	UNF	4000-759	4000-786	4000-779	46.85	000	2591-698	9.00	4060-025	4060-026	106.45
3-48	UNC	4000-855	4000-885	4000-877	40.45	000	2591-698	9.00	4060-030	4060-031	93.70
3-56	UNF	4000-874	4000-902	4000-895	40.45	000	2591-698	9.00	4060-035	4060-036	93.70
4-40	UNC	4000-958	4000-991	4000-982	40.45	00	2591-699	8.00	4060-040	4060-041	92.60
4-48	UNF	4000-985	4001-016	4001-008	40.45	00	2591-699	8.00	4060-045	4060-046	92.60
5-40	UNC	4001-088	4001-121	4001-113	34.05	00	2591-699	8.00	4060-050	4060-051	79.85
5-44	UNF	4001-102	4001-134	4001-126	34.05	00	2591-699	8.00	4060-055	4060-056	79.85
6-32	UNC	4001-177	4001-214	4001-204	34.05	00	2591-699	8.00	4060-060	4060-061	79.85
6-40	UNF	4001-218	4001-252	4001-243	34.05	00	2591-699	8.00	4060-065	4060-066	79.85
8-32	UNC	4001-437	4001-475	4001-465	34.05	0	2591-700	8.00	4060-070	4060-071	79.85
8-36	UNF	4001-460	4001-496	4001-487	34.05	0	2591-700	8.00	4060-075	4060-076	79.85
10-24	UNC	4001-629	4001-672	4001-661	34.05	0	2591-700	8.00	4060-080	4060-081	79.85
10-32	UNF	4001-697	4001-736	4001-726	34.05	0	2591-700	8.00	4060-085	4060-086	79.85
12-24	UNC	4001-889	4001-933	4001-922	34.05	0	2591-700	8.00	4060-090	4060-091	79.85
12-28	UNF	4001-928	4001-970	4001-959	34.05	0	2591-700	8.00	4060-095	4060-096	79.85
12-32	UNEF	4001-957	4001-998	4001-988	43.65	0	2591-700	8.00	4060-100	4060-101	99.00
1/4-20	UNC	4002-175	4002-224	4002-211	31.95	1	2591-701	8.00	4060-105	4060-106	75.60
1/4-28	UNF	4002-268	4002-311	4002-300	31.95	1	2591-701	8.00	4060-110	4060-111	75.60
1/4-32	UNEF	4002-297	4002-339	4002-328	56.40	1	2591-701	8.00	4060-115	4060-116	124.55
5/16-18	UNC	4002-764	4002-817	4002-803	31.95	1	2591-701	8.00	4060-120	4060-121	75.60
5/16-24	UNF	4002-854	4002-902	4002-890	31.95	1	2591-701	8.00	4060-125	4060-126	75.60
5/16-32	UNEF	4002-922	4002-964	4002-953	56.40	1	2591-701	8.00	4060-130	4060-131	124.55
3/8-16	UNC	4003-344	4003-401	4003-387	33.00	2	2591-702	8.00	4060-135	4060-136	77.70
3/8-24	UNF	4003-479	4003-528	4003-516	33.00	2	2591-702	8.00	4060-140	4060-141	77.70
3/8-32	UNEF	4003-547	4003-591	4003-580	62.80	2	2591-702	8.00	4060-145	4060-146	137.30
7/16-14	UNC	4003-911	4003-972	4003-957	33.00	2	2591-702	8.00	4060-150	4060-151	77.70
7/16-20	UNF	4004-050	4004-104	4004-091	33.00	2	2591-702	8.00	4060-155	4060-156	77.70
7/16-28	UNEF	4004-143	4004-189	4004-178	62.80	2	2591-702	8.00	4060-160	4060-161	137.30
1/2-13	UNC	4004-500	4004-565	4004-548	34.05	2	2591-702	8.00	4060-165	4060-166	79.85
1/2-20	UNF	4004-675	4004-731	4004-717	34.05	2	2591-702	8.00	4060-170	4060-171	79.85
1/2-28	UNEF	4004-768	4004-816	4004-804	66.00	2	2591-702	8.00	4060-175	4060-176	143.70
9/16-12	UNC	4005-084	4005-152	4005-135	44.70	3	2591-703	8.00	4060-180	4060-181	101.15
9/16-18	UNF	4005-264	4005-323	4005-308	44.70	3	2591-703	8.00	4060-185	4060-186	101.15
9/16-24	UNEF	4005-354	4005-405	4005-392	71.30	3	2591-703	8.00	4060-190	4060-191	154.35
5/8-11	UNC	4005-660	4005-732	4005-714	45.75	3	2591-703	8.00	4060-195	4060-196	103.25
5/8-18	UNF	4005-889	4005-949	4005-934	45.75	3	2591-703	8.00	4060-200	4060-201	103.25
5/8-24	UNEF	4005-979	4006-031	4006-018	72.40	3	2591-703	8.00	4060-205	4060-206	156.50
11/16-24	UNEF	4006-604	4006-656	4006-643	74.50	3	2591-703	8.00	4060-210	4060-211	160.75
3/4-10	UNC	4006-850	4006-927	4006-907	48.95	3	2591-703	8.00	4060-215	4060-216	109.65
3/4-16	UNF	4007-094	4007-159	4007-143	48.95	3	2591-703	8.00	4060-220	4060-221	109.65
3/4-20	UNEF	4007-175	4007-232	4007-218	72.40	3	2591-703	8.00	4060-225	4060-226	156.50
13/16-20	UNEF	4007-800	4007-857	4007-843	77.70	3	2591-703	8.00	4060-230	4060-231	167.15
7/8-9	UNC	4008-028	4008-110	4008-089	53.25	4	2591-704	9.00	4060-235	4060-236	119.25
7/8-14	UNF	4008-286	4008-356	4008-339	53.25	4	2591-704	9.00	4060-240	4060-241	119.25
7/8-20	UNEF	4008-425	4008-482	4008-468	80.90	4	2591-704	9.00	4060-245	4060-246	174.60
15/16-20	UNEF	4009-050	4009-109	4009-094	83.05	4	2591-704	9.00	4060-250	4060-251	178.85

"W" TOLERANCE, CHROME PLATED. MULTIPLE LEADS & OTHER CLASSES – P.O.A.


(Continued)

Thread Plug Gages - UNC, UNF, UN & UNEF

Right Hand – Class X Tolerance



Set includes one each:
Go & No Go member with handle



SHORT FORM CERTIFICATION - N/C — LONG FORM - CERTIFIED TO ACTUAL DIMENSIONS - ADDITIONAL CHARGE

SIZE	NC NF NEF	GO CLASS 1-2-3 1B-2B-3B	MEMBERS		PRICE EACH	TAPER LOCK HANDLE SIZE	HANDLES		PRICE EACH	SETS		PRICE EACH SET
			NO GO CLASS 2B	NO GO CLASS 3B			HANDLE ORDER NO.	CLASS 2B SET W/ HANDLE		CLASS 3B SET W/ HANDLE		
1-8	UNC	4009-188	4009-276	4009-254	\$62.80	4	2591-704	\$9.00	4060-255	4060-256	\$138.40	
1-12	UN	4009-459	4009-535	4009-516	62.80	4	2591-704	9.00	4060-260	4060-261	138.40	
1-14	UNS	4009-536	4009-609	4009-590	62.80	4	2591-704	9.00	4060-265	4060-266	138.40	
1-20	UNEF	4009-675	4009-734	4009-719	90.50	4	2591-704	9.00	4060-270	4060-271	193.75	
1 1/16-12	UN	4010-084	4010-158	4010-139	107.50	4	2591-704	9.00	4060-275	4060-276	227.80	
1 1/16-18	UNEF	4010-264	4010-326	4010-310	91.55	4	2591-704	9.00	4060-280	4060-281	195.85	
1 1/8-7	UNC	4010-322	4010-416	4010-393	76.65	4	2591-704	9.00	4060-285	4060-286	166.05	
1 1/8-12	UNF	4010-709	4010-787	4010-768	76.65	4	2591-704	9.00	4060-290	4060-291	166.05	
1 1/8-18	UNEF	4010-889	4010-951	4010-935	93.70	4	2591-704	9.00	4060-295	4060-296	200.15	
1 3/16-12	UN	4011-334	4011-409	4011-390	107.50	4	2591-704	9.00	4060-300	4060-301	228.85	
1 3/16-18	UNEF	4011-514	4011-577	4011-561	93.70	4	2591-704	9.00	4060-305	4060-306	201.20	
1 1/4-7	UNC	4011-572	4011-668	4011-644	80.90	5	2591-705	10.00	4060-310	4060-311	175.65	
1 1/4-12	UNF	4011-959	4012-039	4012-019	80.90	5	2591-705	10.00	4060-315	4060-316	175.65	
1 1/4-18	UNEF	4012-139	4012-202	4012-186	97.95	5	2591-705	10.00	4060-320	4060-321	209.70	
1 5/16-12	UN	4012-584	4012-659	4012-640	112.85	5	2591-705	10.00	4060-325	4060-326	239.50	
1 5/16-18	UNEF	4012-764	4012-827	4012-811	110.70	5	2591-705	10.00	4060-330	4060-331	235.25	
1 3/8-6	UNC	4012-667	4012-771	4012-745	88.35	5	2591-705	10.00	4060-335	4060-336	190.55	
1 3/8-12	UNF	4013-209	4013-291	4013-270	88.35	5	2591-705	10.00	4060-340	4060-341	190.55	
1 3/8-18	UNEF	4013-389	4013-452	4013-436	114.95	5	2591-705	10.00	4060-345	4060-346	243.75	
1 7/16-12	UN	4013-834	4013-910	4013-891	128.80	5	2591-705	10.00	4060-350	4060-351	271.45	
1 7/16-18	UNEF	4014-014	4014-079	4014-062	120.30	5	2591-705	10.00	4060-355	4060-356	254.40	
1 1/2-6	UNC	4013-917	4014-022	4013-996	102.20	5	2591-705	10.00	4060-360	4060-361	218.25	
1 1/2-12	UNF	4014-459	4014-542	4014-522	102.20	5	2591-705	10.00	4060-365	4060-366	218.25	
1 1/2-18	UNEF	4014-639	4014-704	4014-687	123.50	5	2591-705	10.00	4060-370	4060-371	260.80	

"W" TOLERANCE, CHROME PLATED. MULTIPLE LEADS & OTHER CLASSES – P.O.A.

Call For Immediate Delivery From Stock On:



- High Performance
- Standards
- Special Thread
- Acme Thread
- British Thread
- Pipe Thread
- Left Hand

Thread Ring Gages - UNC, UNF, UN & UNEF

Right Hand – Class X Tolerance



and
**Vermont
Gage**

SHORT FORM CERTIFICATION - N/C — LONG FORM - CERTIFIED TO ACTUAL DIMENSIONS - ADDITIONAL CHARGE

SIZE	UNC UNF NEF	GO CLASS 2A	GO CLASS 3A	MEMBERS		PRICE EACH	HOLDERS			SETS		PRICE EACH SET
				NO GO CLASS 2A	NO GO CLASS 3A		SIZE	ORDER NO.	PRICE EACH	2A SET	3A SET	
0-80	UNF	4100-514	4100-519	4100-496	4100-506	\$173.45	1TH	2591-781	\$12.50	4070-005	4070-006	\$346.90
1-64	UNC	4100-623	4100-629	4100-603	4100-614	159.55	1TH	2591-781	12.50	4070-010	4070-011	319.15
1-72	UNF	4100-634	4100-640	4100-615	4100-626	159.55	1TH	2591-781	12.50	4070-015	4070-016	319.15
2-56	UNC	4100-738	4100-744A	4100-717	4100-728	127.20	1TH	2591-781	12.50	4070-020	4070-021	254.40
2-64	UNF	4100-753	4100-759	4100-733	4100-744	127.20	1TH	2591-781	12.50	4070-025	4070-026	254.40
3-48	UNC	4100-848	4100-855	4100-825	4100-838	127.20	1TH	2591-781	12.50	4070-030	4070-031	254.40
3-56	UNF	4100-867	4100-874	4100-845	4100-858	127.20	1TH	2591-781	12.50	4070-035	4070-036	254.40
4-40	UNC	4100-950	4100-958	4100-925	4100-939	113.30	1TH	2591-781	12.50	4070-040	4070-041	226.60
4-48	UNF	4100-978	4100-985	4100-954	4100-967	113.30	1TH	2591-781	12.50	4070-045	4070-046	226.60
5-40	UNC	4101-080	4101-088	4101-054	4101-069	102.90	1TH	2591-781	12.50	4070-050	4070-051	205.80
5-44	UNF	4101-095	4101-102	4101-070	4101-083	102.90	1TH	2591-781	12.50	4070-055	4070-056	205.80
6-32	UNC	4101-169	4101-177	4101-141	4101-156	102.90	1TH	2591-781	12.50	4070-060	4070-061	205.80
6-40	UNF	4101-210	4101-218	4101-184	4101-198	102.90	1TH	2591-781	12.50	4070-065	4070-066	205.80
8-32	UNC	4101-428	4101-437	4101-399	4101-415	102.90	1TH	2591-781	12.50	4070-070	4070-071	205.80
8-36	UNF	4101-452	4101-460	4101-424	4101-439	102.90	1TH	2591-781	12.50	4070-075	4070-076	205.80
10-24	UNC	4101-619	4101-629	4101-586	4101-604	102.90	1TH	2591-781	12.50	4070-080	4070-081	205.80
10-32	UNF	4101-688	4101-697	4101-658	4101-674	102.90	1TH	2591-781	12.50	4070-085	4070-086	205.80
12-24	UNC	4101-879	4101-889	4101-845	4101-863	102.90	1TH	2591-781	12.50	4070-090	4070-091	205.80
12-28	UNF	4101-918	4101-928	4101-866	4101-904	102.90	1TH	2591-781	12.50	4070-095	4070-096	205.80
12-32	UNEF	4101-948	4101-957	4101-917	4101-933	132.95	1TH	2591-781	12.50	4070-100	4070-101	265.95
1/4-20	UNC	4102-164	4102-175	4102-127	4102-147	99.45	2TH	2591-782	14.75	4070-105	4070-106	198.85
1/4-28	UNF	4102-258	4102-268	4102-225	4102-243	99.45	2TH	2591-782	14.75	4070-110	4070-111	198.85
1/4-32	UNEF	4102-287	4102-297	4102-255	4102-273	136.45	2TH	2591-782	14.75	4070-115	4070-116	272.85
5/16-18	UNC	4102-752	4102-764	4102-712	4102-734	99.45	2TH	2591-782	14.75	4070-120	4070-121	198.85
5/16-24	UNF	4102-843	4102-854	4102-806	4102-827	99.45	2TH	2591-782	14.75	4070-125	4070-126	198.85
5/16-32	UNEF	4102-912	4102-922	4102-880	4102-898	136.45	2TH	2591-782	14.75	4070-130	4070-131	272.85
3/8-16	UNC	4103-331	4103-344	4103-287	4103-311	106.35	3TH	2591-783	16.75	4070-135	4070-136	212.75
3/8-24	UNF	4103-468	4103-479	4103-430	4103-450	106.35	3TH	2591-783	16.75	4070-140	4070-141	212.75
3/8-32	UNEF	4103-537	4103-547	4103-503	4103-522	138.75	3TH	2591-783	16.75	4070-145	4070-146	277.50
7/16-14	UNC	4103-897	4103-911	4103-850	4103-876	106.35	3TH	2591-783	16.75	4070-150	4070-151	212.75
7/16-20	UNF	4104-037	4104-050	4103-995	4104-019	106.35	3TH	2591-783	16.75	4070-155	4070-156	212.75
7/16-28	UNEF	4104-132	4104-143	4104-096	4104-116	138.75	3TH	2591-783	16.75	4070-160	4070-161	277.50
1/2-13	UNC	4104-485	4104-500	4104-435	4104-463	116.80	3TH	2591-783	16.75	4070-165	4070-166	233.55
1/2-20	UNF	4104-662	4104-675	4104-619	4104-643	116.80	3TH	2591-783	16.75	4070-170	4070-171	233.55
1/2-28	UNEF	4104-757	4104-768	4104-720	4104-740	146.85	3TH	2591-783	16.75	4070-175	4070-176	293.70
9/16-12	UNC	4105-068	4105-084	4105-016	4105-045	129.50	4TH	2591-784	20.00	4070-180	4070-181	259.00
9/16-18	UNF	4105-250	4105-264	4105-205	4105-230	129.50	4TH	2591-784	20.00	4070-185	4070-186	259.00
9/16-24	UNEF	4105-342	4105-354	4105-303	4105-325	153.80	4TH	2591-784	20.00	4070-190	4070-191	307.55
5/8-11	UNC	4105-644	4105-660	4105-589	4105-619	130.65	4TH	2591-784	20.00	4070-195	4070-196	261.30
5/8-18	UNF	4105-875	4105-889	4105-828	4105-854	130.65	4TH	2591-784	20.00	4070-200	4070-201	261.30
5/8-24	UNEF	4105-967	4105-979	4105-927	4105-949	159.55	4TH	2591-784	20.00	4070-205	4070-206	319.15
11/16-24	UNEF	4106-592	4106-604	4106-552	4106-574	173.45	4TH	2591-784	20.00	4070-210	4070-211	346.90
3/4-10	UNC	4106-832	4106-850	4106-773	4106-806	166.50	4TH	2591-784	20.00	4070-215	4070-216	333.00
3/4-16	UNF	4107-079	4107-094	4107-029	4107-056	166.50	4TH	2591-784	20.00	4070-220	4070-221	333.00
3/4-20	UNEF	4107-162	4107-175	4107-118	4107-142	198.85	4TH	2591-784	20.00	4070-225	4070-226	397.75
13/16-20	UNEF	4107-787	4107-800	4107-743	4107-767	208.10	5TH	2591-785	26.00	4070-230	4070-231	416.25
7/8-9	UNC	4108-009	4108-028	4107-946	4107-981	178.05	5TH	2591-785	26.00	4070-235	4070-236	356.10
7/8-14	UNF	4108-270	4108-286	4108-216	4108-245	178.05	5TH	2591-785	26.00	4070-240	4070-241	356.10
7/8-20	UNEF	4108-412	4108-425	4108-368	4108-392	210.45	5TH	2591-785	26.00	4070-245	4070-246	420.85
15/16-20	UNEF	4109-036	4109-050	4108-991	4109-016	217.40	5TH	2591-785	26.00	4070-250	4070-251	434.75
1/8	UNC	4109-168	4109-188	4109-100	4109-137	217.40	5TH	2591-785	26.00	4070-255	4070-256	434.75
1-12	UNF	4109-441	4109-459	4109-382	4109-415	217.40	5TH	2591-785	26.00	4070-260	4070-261	434.75
1-14	UNF	4109-519	4109-536	4109-463	4109-494	217.40	5TH	2591-785	26.00	4070-265	4070-266	434.75
1-20	UNEF	4109-661	4109-675	4109-616	4109-641	242.80	5TH	2591-785	26.00	4070-270	4070-271	485.65
1 1/16-12	UN	4110-067	4110-084	4110-010	4110-042	285.60	5TH	2591-785	26.00	4070-275	4070-276	571.20

"W" TOLERANCE, CHROME PLATED MULTIPLE LEADS & OTHER CLASSES – P.O.A.

(Continued)

Thread Ring Gages - UNC, UNF, UN & UNEF

Right Hand – Class X Tolerance




SIZE	UNC UNF NEF	GO CLASS 2A	GO CLASS 3A	MEMBERS		PRICE EACH	HOLDERS			SETS		PRICE EACH SET
				NO GO CLASS 2A	NO GO CLASS 3A		SIZE	ORDER NO.	PRICE EACH	2A SET	3A SET	
1 1/16-18	UNEF	4110-250	4110-264	4110-203	4110-228A	\$255.55	5TH	2591-785	\$26.00	4070-280	4070-281	\$511.05
1 1/8-7	UNC	4110-300	4110-322	4110-228	4110-268	254.40	5TH	2591-785	26.00	4070-285	4070-286	508.75
1 1/8-12	UNF	4110-691	4110-709	4110-631	4110-664	254.40	5TH	2591-785	26.00	4070-290	4070-291	508.75
1 1/8-18	UNEF	4110-875	4110-889	4110-828	4110-853	269.40	5TH	2591-785	26.00	4070-295	4070-296	538.80
1 3/16-12		4111-317	4111-334	4111-259	4111-291	305.25	5TH	2591-785	26.00	4070-300	4070-301	610.50
1 3/16-18	UNEF	4111-499	4111-514	4111-450	4111-478	269.40	5TH	2591-785	26.00	4070-305	4070-306	538.80
1 1/4-7	UNC	4111-550A	4111-572	4111-476	4111-517	278.65	6TH	2591-786	34.50	4070-310	4070-311	557.30
1 1/4-12	UNF	4111-941	4111-959	4111-879	4111-913	278.65	6TH	2591-786	34.50	4070-315	4070-316	557.30
1 1/4-18	UNEF	4112-124	4112-139	4112-075	4112-103	284.45	6TH	2591-786	34.50	4070-320	4070-321	568.85
1 5/16-12	UN	4112-567	4112-584	4112-509	4112-541	306.40	6TH	2591-786	34.50	4070-325	4070-326	612.80
1 5/16-18	UNEF	4112-749	4112-764	4112-700	4112-728	290.20	6TH	2591-786	34.50	4070-330	4070-331	580.45
1 3/8-6	UNC	4112-643	4112-667	4112-563	4112-607	290.20	6TH	2591-786	34.50	4070-335	4070-336	580.45
1 3/8-12	UNF	4113-190	4113-209	4113-127	4113-162	290.20	6TH	2591-786	34.50	4070-340	4070-341	580.45
1 3/8-18	UNEF	4113-374	4113-389	4113-325	4113-353	312.20	6TH	2591-786	34.50	4070-345	4070-346	624.40
1 7/16-12	UN	4113-816	4113-834	4113-757	4113-790	330.70	6TH	2591-786	34.50	4070-350	4070-351	661.35
1 7/16-18	UNEF	4113-999	4114-014	4113-949	4113-977	317.95	6TH	2591-786	34.50	4070-355	4070-356	635.95
1 1/2-6	UNC	4113-893	4113-917	4113-812	4113-856	317.95	6TH	2591-786	34.50	4070-360	4070-361	635.95
1 1/2-12	UNF	4114-440	4114-459	4114-376	4114-411	317.95	6TH	2591-786	34.50	4070-365	4070-366	635.95
1 1/2-18	UNEF	4114-624	4114-639	4114-574	4114-602	334.15	6TH	2591-786	34.50	4070-370	4070-371	668.30

SIZE	NPT L1		NPTF L1		NPTF L2		NPTF 6 STEP	
	ORDER NO.	PRICE EACH	ORDER NO.	PRICE EACH	ORDER NO.	PRICE EACH	ORDER NO.	PRICE EACH
1/16-27	4130-101	\$179.20	4130-201	\$190.80	4130-202	\$265.95	4130-203	\$312.20
1/8-27	4130-106	127.20	4130-206	132.95	4130-207	260.15	4130-208	312.20
1/4-18	4130-111	138.75	4130-211	156.10	4130-212	265.95	4130-213	312.20
3/8-18	4130-116	156.10	4130-216	167.65	4130-217	283.30	4130-218	312.20
1/2-14	4130-121	173.45	4130-221	179.20	4130-222	289.05	4130-223	312.20
3/4-14	4130-126	196.55	4130-226	208.10	4130-227	323.75	4130-228	346.90
1-11 1/2	4130-131	225.45	4130-231	237.05	4130-232	346.90	4130-233	364.20
1 1/4-11 1/2	4130-136	237.05	4130-236	254.40	4130-237	375.80	4130-238	393.15
1 1/2-11 1/2	4130-141	289.05	4130-241	306.40	4130-242	422.05	4130-243	433.60
2-11 1/2	4130-146	346.90	4130-246	370.00	4130-247	485.65	4130-248	497.20
2 1/2-8	4130-151	410.45	4130-251	433.60	4130-252	583.90	4130-253	595.45
3-8	4130-156	497.20	4130-256	537.65	4130-257	687.95	4130-258	722.65
3 1/2	4130-161	699.55						
4-8	4130-166	809.40						
5-8	4130-171	953.90						
6-8	4130-176	1144.70						

ANPT ALSO AVAILABLE

Taper Pipe Ring Gages

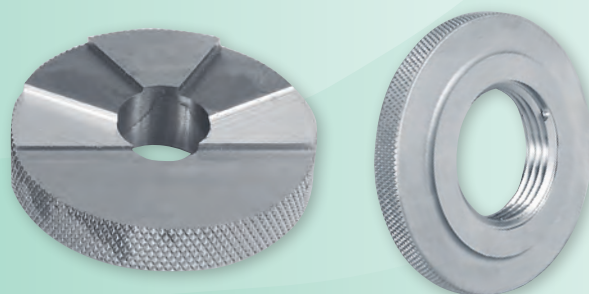

SIZE	NPT L1		NPTF L1		NPTF L3		NPTF 6 STEP		SIZE	HANDLE	
	ORDER NO.	PRICE EACH	ORDER NO.	PRICE EACH	ORDER NO.	PRICE EACH	ORDER NO.	PRICE EACH		ORDER NO.	PRICE EACH
1/16-27	4120-101	\$ 92.50	4120-201	\$ 121.40	4120-202	\$ 121.40	4120-203	\$185.00	1	2591-701	\$8.00
1/8-27	4120-106	69.35	4120-206	92.50	4120-207	92.50	4120-208	185.00	2	2591-702	8.00
1/4-18	4120-111	75.15	4120-211	98.30	4120-212	98.30	4120-213	185.00	3	2591-703	8.00
3/8-18	4120-116	80.95	4120-216	121.40	4120-217	121.40	4120-218	185.00	3	2591-703	8.00
1/2-14	4120-121	92.50	4120-221	138.75	4120-222	138.75	4120-223	185.00	4	2591-704	9.00
3/4-14	4120-126	104.05	4120-226	150.30	4120-227	150.30	4120-228	202.35	4	2591-704	9.00
1-11 1/2	4120-131	121.40	4120-231	173.45	4120-232	173.45	4120-233	213.90	5	2591-705	10.00
1 1/4-11 1/2	4120-136	138.75	4120-236	196.55	4120-237	196.55	4120-238	237.05	5	2591-705	10.00
1 1/2-11 1/2	4120-141	150.30	4120-241	213.90	4120-242	213.90	4120-243	265.95	5	2591-705	10.00
2-11 1/2	4120-146	185.00	4120-246	265.95	4120-247	265.95	4120-248	370.00	5	2591-705	10.00
2 1/2-8	4120-151	219.70	4120-251	387.35	4120-252	387.35	4120-253	555.00	6	2591-760	14.00
3-8	4120-156	277.50	4120-256	427.80	4120-257	427.80	4120-258	601.25	6	2591-760	14.00
3 1/2-8	4120-161	416.25							7	2591-770	16.00
4-8	4120-166	456.70							7	2591-770	16.00
5-8	4120-171	618.60							7	2591-770	16.00
6-8	4120-176	768.90							7	2591-770	16.00

ANPT ALSO AVAILABLE

Taper Pipe Plug Gages



Metric Plug & Ring Gages - Right Hand



Plugs - 6H Tolerance
Rings - 6G Tolerance



SIZE	PLUG MEMBER			HANDLE - TAPER LOCK			RING MEMBER			HOLDERS		
	GO ORDER NO.	NO GO ORDER NO.	PRICE EACH	SIZE	ORDER NO.	PRICE EACH	GO ORDER NO.	NO GO ORDER NO.	PRICE EACH	SIZE	ORDER NO.	PRICE EACH
M 1.6 x 0.35	4700-541	4700-574	\$53.25	000	2591-698	\$ 9.00	4600-533	4600-509	\$195.40	1 TH	2591-781	\$12.50
M 1.8 x 0.35	4700-620	4700-622	53.25	000	2591-698	9.00	4600-611	4600-588	195.40	1 TH	2591-781	12.50
M 2.0 x 0.40	4700-686	4700-720	53.25	000	2591-698	9.00	4600-677	4600-652	160.70	1 TH	2591-781	12.50
M 2.2 x 0.45	4700-752	4700-788	53.25	000	2591-698	9.00	4600-743	4600-716	160.70	1 TH	2591-781	12.50
M 2.5 x 0.45	4700-870	4700-906	48.95	000	2591-698	9.00	4600-861	4600-834	160.70	1 TH	2591-781	12.50
M 3.0 x 0.50	4701-054	4701-092	48.95	00	2591-699	8.00	4601-045	4601-016	138.75	1 TH	2591-781	12.50
M 3.5 x 0.60	4701-225	4701-268	43.65	00	2591-699	8.00	4601-216	4601-183	137.60	1 TH	2591-781	12.50
M 4.0 x 0.70	4701-396	4701-442	43.65	00	2591-699	8.00	4601-387	4601-352	137.60	1 TH	2591-781	12.50
M 4.5 x 0.75	4701-580	4701-626	43.65	00	2591-699	8.00	4601-571	4601-536	137.60	1 TH	2591-781	12.50
M 5.0 x 0.80	4701-764	4701-812	43.65	0	2591-700	8.00	4601-754	4601-717	137.60	1 TH	2591-781	12.50
M 6.0 x 1.00	4702-107	4702-165	34.05	1	2591-701	8.00	4602-096	4602-052	119.10	1 TH	2591-781	12.50
M 7.0 x 1.00	4702-500	4702-559	34.05	1	2591-701	8.00	4602-489	4602-446	119.10	1 TH	2591-781	12.50
M 8.0 x 1.25	4702-830	4702-892	34.05	1	2591-701	8.00	4602-818	4602-773	119.10	2 TH	2591-782	14.75
M 8.0 x 1.00	4702-894	4702-952	34.05	1	2591-701	8.00	4602-883	4602-840	119.10	2 TH	2591-782	14.75
M 10.0 x 1.25	4703-618	4703-680	38.30	2	2591-702	8.00	4603-506	4603-560	130.65	3 TH	2591-783	16.75
M 10.0 x 1.50	4703-554	4703-624	38.30	2	2591-702	8.00	4603-540	4603-489	130.65	3 TH	2591-783	16.75
M 12.0 x 1.75	4704-277	4704-355	40.45	2	2591-702	8.00	4604-263	4604-205	139.90	3 TH	2591-783	16.75
M 12.0 x 1.25	4704-405	4704-475	40.45	2	2591-702	8.00	4604-393	4604-342	139.90	3 TH	2591-783	16.75
M 14.0 x 2.00	4705-001	4705-083	44.70	3	2591-703	8.00	4604-985	4604-923	145.70	3 TH	2591-783	16.75
M 14.0 x 1.50	4705-129	4705-203	44.70	3	2591-703	8.00	4605-115	4605-061	145.70	3 TH	2591-783	16.75
M 16.0 x 2.00	4705-788	4705-871	45.75	3	2591-703	8.00	4605-772	4605-710	145.70	4 TH	2591-784	20.00
M 16.0 x 1.50	4705-916	4705-990	45.75	3	2591-703	8.00	4605-903	4605-849	145.70	4 TH	2591-784	20.00
M 18.0 x 2.50	4706-448	4706-535	51.10	3	2591-703	8.00	4606-430	4605-364	202.35	4 TH	2591-784	20.00
M 18.0 x 1.50	4706-704	4706-777	51.10	3	2591-703	8.00	4606-690	4606-636	202.35	4 TH	2591-784	20.00
M 20.0 x 2.50	4707-235	4707-322	58.55	3	2591-703	8.00	4607-218	4607-152	249.75	4 TH	2591-784	20.00
M 20.0 x 1.50	4707-491	4707-565	58.55	3	2591-703	8.00	4607-477	4607-423	249.75	4 TH	2591-784	20.00
M 22.0 x 2.50	4708-023	4708-110	59.60	4	2591-704	9.00	4608-005	4607-939	256.70	4 TH	2591-784	20.00
M 22.0 x 1.50	4708-278	4708-352	59.60	4	2591-704	9.00	4608-265	4608-211	256.70	4 TH	2591-784	20.00
M 24.0 x 3.00	4708-682	4708-785	63.85	4	2591-704	9.00	4608-662	4608-584	291.35	5 TH	2591-785	26.00
M 24.0 x 2.00	4708-938	4709-025	63.85	4	2591-704	9.00	4608-922	4608-856	291.35	5 TH	2591-785	26.00
M 27.0 x 3.00	4709-863	4709-966	88.35	4	2591-704	9.00	4609-843	4609-765	284.45	5 TH	2591-785	26.00
M 27.0 x 2.00	4710-119	4710-206	88.35	4	2591-704	9.00	4610-103	4610-037	284.45	5 TH	2591-785	26.00
M 30.0 x 3.50	4710-917	4711-026	134.15	5	2591-705	10.00	4610-895	4610-812	365.40	5 TH	2591-785	26.00
M 30.0 x 2.00	4711-300	4711-387	107.50	5	2591-705	10.00	4611-284	4613-218	304.10	5 TH	2591-785	26.00
M 33.0 x 3.50	4712-098	4712-207	112.85	5	2591-705	10.00	4612-076	4611-993	346.90	6 TH	2591-786	34.50
M 33.0 x 2.00	4712-481	4712-508	112.85	5	2591-705	10.00	4612-465	4612-399	319.15	6 TH	2591-786	34.50
M 36.0 x 4.00	4713-151	4713-268	145.85	5	2591-705	10.00	4613-126	4613-039	383.85	6 TH	2591-786	34.50
M 36.0 x 3.00	4713-406	4713-510	127.75	5	2591-705	10.00	4613-386	4613-309	346.90	6 TH	2591-786	34.50
M 39.0 x 4.00	4714-332	4714-449	183.10	5-1/2	2591-755	13.00	4614-307	4614-220	393.15	6 TH	2591-786	34.50
M 39.0 x 3.00	4714-587	4714-691	159.70	5-1/2	2591-755	13.00	4614-568	4614-490	374.60	6 TH	2591-786	34.50

"W" TOLERANCE, CHROME PLATED MULTIPLE LEADS & OTHER CLASSES - P.O.A.

IN STOCK!

- Special Threads • NC & NF Left Hand •
- Setting Plugs • All Made In The U.S.A. •

Pin Gages

Class ZZ Pin Sets

NEW ITEM

Make quick and accurate measurements with Vermont Gage pin gages. Measure hole sizes. Calculate distances between holes. Gage slot widths. Check locations. Use for Go/No-Go gaging. Size in micrometers and snap gages. These economical gages are a must for anyone making frequent and varied measurements.



2

RANGE	NO. OF GAGES	ORDER NO. (PLUS)	ORDER NO. (MINUS)	PRICE EACH
INCH SETS (.001 INCREMENTS)				
.0060" to .0600"	55	3862-030	3862-031	\$ 100.00
.0065" to .0605"	55	3862-032	3862-033	100.00
.0110" to .0600"	50	3862-000	3862-001	75.00
.0115" to .0605"	50	3862-002	3862-003	75.00
.0110" to .2500"	240	3862-034	3862-035	230.00
.0115" to .2505"	240	3862-036	3862-037	230.00
.0610" to .2500"	190	3862-006	3862-007	165.00
.0615" to .2505"	190	3862-008	3862-009	165.00
.2510" to .5000"	250	3862-012	3862-013	245.00
.2515" to .5005"	250	3862-014	3862-015	245.00
.5010" to .8320"	125	3862-018	3862-019	290.00
.5015" to .6255"	125	3862-038	3862-039	290.00
.6260" to .7500"	125	3862-022	3862-023	315.00
.6265" to .7505"	125	3862-040	3862-041	315.00
.7510" to .8320"	82	3862-024	3862-025	545.00
.7515" to .8325"	82	3862-042	3862-043	545.00
.8330" to .9160"	84	3862-026	3862-027	635.00
.8335" to .9165"	84	3862-044	3862-045	635.00
.9170" to 1.0000"	84	3862-028	3862-029	660.00
.9175" to 1.0005"	84	3862-046	3862-047	660.00

RANGE	NO. OF GAGES	ORDER NO. (PLUS)	ORDER NO. (MINUS)	PRICE EACH
METRIC SETS (.05MM INCREMENTS)				
0.20mm to 1.28mm	55	3862-048	3862-049	\$ 90.00
0.21mm to 1.29mm	55	3862-050	3862-051	90.00
1.30mm to 4.98mm	185	3862-052	3862-053	195.00
1.31mm to 4.99mm	185	3862-054	3862-055	195.00
5.00mm to 9.98mm	250	3862-056	3862-057	305.00
5.01mm to 9.99mm	250	3862-058	3862-059	305.00
10.00mm to 13.98mm	200	3862-060	3862-061	265.00
10.01mm to 13.99mm	200	3862-062	3862-063	265.00
14.00mm to 16.48mm	125	3862-064	3862-065	335.00
14.01mm to 16.49mm	125	3862-066	3862-067	335.00
16.50mm to 18.98mm	125	3862-068	3862-069	430.00
16.51mm to 18.99mm	125	3862-070	3862-071	430.00
19.00mm to 20.98mm	100	3862-072	3862-073	745.00
19.01mm to 20.99mm	100	3862-074	3862-075	745.00
21.00mm to 22.48mm	75	3862-076	3862-077	635.00
21.01mm to 22.49mm	75	3862-078	3862-079	635.00
22.50mm to 23.98mm	75	3862-080	3862-081	660.00
22.51mm to 23.99mm	75	3862-082	3862-083	660.00
24.00mm to 25.48mm	75	3862-084	3862-085	690.00
24.01mm to 25.49mm	75	3862-086	3862-087	690.00



FEATURES:

- Class ZZ
- (.0002" or .005mm tolerance)
- Go (Plus) or NoGo (Minus)
- NIST traceable
- .0005", or .02mm sizes
- .001" or .02mm set increments
- 52100 tool steel; 60/62 Rc
- 2" long
- 10 microinch finish or better
- within .0001" round
- marked with size and direction of tolerance on gages over .060"
- Certificate of Accuracy included

Black Guard™ Pin Sets

BLACK GUARD™ black oxide treatment typically penetrates .00004" to .00006" deep, which will visually reveal wear patterns allowing the inspector to calibrate or replace gage pins more effectively. BLACK GUARD™ treatment will help prevent rust & corrosion, which will extend the useful life of the gage.

- PREVENTS RUST & CORROSION
- BRIGHT CLEAR MARKING
- VISIBLE WEAR INDICATION
- LONGER GAGE LIFE

RANGE	NO. OF GAGES	ORDER NO. (PLUS)	ORDER NO. (MINUS)	PRICE EACH
BLACK GUARD SETS				
.0060" to .0600"	55	3865-027	3865-028	\$ 100.00
.0065" to .0605"	55	3865-029	3865-030	100.00
.0110" to .0600"	50	3865-005	3865-006	75.00
.0115" to .0605"	50	3865-007	3865-008	75.00
.0110" to .2500"	240	3865-031	3865-032	230.00
.0115" to .2505"	240	3865-033	3865-034	230.00
.0610" to .2500"	190	3865-009	3865-010	165.00
.0615" to .2505"	190	3865-011	3865-012	165.00
.2510" to .5000"	250	3865-013	3865-014	245.00
.5010" to .6250"	125	3865-017	3865-018	290.00



FEATURES:

- Class ZZ (.0002" or .005mm tolerance)
- Go (Plus) or NoGo (Minus)
- NIST traceable
- .0005", or .02mm sizes
- .001" or .02mm set increments
- 52100 tool steel; 60/62 Rc
- 2" long
- 10 microinch finish or better
- within .0001" round
- marked with size and direction of tolerance on gages over .060"
- Certificate of Accuracy included
- Registered ISO 9002

Class ZZ Replacement Pins

Keep old sets in compliance!

Replace missing, damaged, or worn-out Class ZZ gages from your existing sets and libraries. These replacement pins are perfect for updating your old sets, and bringing them back into compliance. Each pin is individually marked with size and direction of tolerance. Packaged with a rust preventative, these pins maintain an indefinite shelf life; so keep several of your most used sizes on hand! Each pin is NIST traceable, and includes a Certificate of Accuracy.

FEATURES:

- Class ZZ (.0002" or .005mm tolerance)
- Go (Plus) or NoGo (Minus)
- NIST traceable
- .0005", or .02mm sizes
- .001" or .02mm set increments
- 52100 tool steel; 60/62 Rc
- 2" long
- 10 microinch finish or better
- Within .0001" round
- Marked with size and direction of tolerance on gages over .060"
- Certificate of Accuracy included
- Registered ISO 9002



Pittsburg® Economy Steel Gage Pin Sets

FEATURES:

- .0002 Accuracy – Specify Plus or Minus tolerances
- Centerless lapped with a 10 Micro finish or better
- Size etched on each member
- Comes standard with attractive hardwood case



SIZE	RANGE	MEMBERS IN SET	PLUS .0002 IN	MINUS .0002 IN	PRICE EACH SET
H1	.061 to .250	190	3100-596	3100-595	\$ 72.50
H2	.251 to .500	250	3100-598	3100-597	110.00
H3	.501 to .625	125	3100-600	3100-599	130.00
H4	.626 to .750	125	3100-602	3100-601	145.00
H5	.751 to .832	82	3100-604	3100-603	250.00
H6	.833 to .916	84	3100-606	3100-605	300.00
H7	.917 to 1.000	84	3100-608	3100-607	315.00

PLUS ORDER RANGE				
RANGE (INCH)	ORDER NO.	TO	ORDER NO.	
.0040 to .0105"	3860-004	\$ 6.25	3860-0105	\$ 6.25
.0110 to .0605"	3860-011	3.00	3860-0605	3.00
.0610 to .5005"	3860-061	2.75	3860-5005	2.75
.5010 to .6255"	3860-501	3.50	3860-6255	3.50
.6260 to .7505"	3860-626	5.25	3860-7505	5.25
.7510 to .8325"	3860-751	7.50	3860-8325	7.50
.8330 to .9165"	3860-833	9.00	3860-9165	9.00
.9170 to 1.0005"	3860-917	9.25	3860-9999	9.25
MINUS ORDER RANGE				
.0040 to .0105"	3861-004	\$ 6.25	3861-0105	\$ 6.25
.0110 to .0605"	3861-011	3.00	3861-0605	3.00
.0610 to .5005"	3861-061	2.75	3861-5005	2.75
.5010 to .6255"	3861-501	3.50	3861-6255	3.50
.6260 to .7505"	3861-626	5.25	3861-7505	5.25
.7510 to .8325"	3861-751	7.50	3861-8325	7.50
.8330 to .9165"	3861-833	9.00	3861-9165	9.00
.9170 to 1.0005"	3861-917	9.25	3861-9999	9.25

BLACK GUARD™ PINS — ALSO AVAILABLE

Plug & Ring Gages

Reversible Gage Handles & Bushings




NEW ITEM

*Inch Handles - Light Blue / Metric Handles - Yellow

SINGLE-END HANDLE			DOUBLE-END HANDLE		
RANGE	HANDLE NO.	ORDER NO.	PRICE EACH	HANDLE NO.	ORDER NO.
INCH					
.0040" to .0750"	1WSE	3865-101	\$ 6.25	1WDE	3865-111
.0751" to .1800"	2WSE	3865-102	6.88	2WDE	3865-112
.1801" to .2810"	3WSE	3865-103	7.50	3WDE	3865-113
.2811" to .4060"	4WSE	3865-104	8.13	4WDE	3865-114
.4061" to .5100"	5WSE	3865-105	11.25	5WDE	3865-115
.5101" to .6350"	6WSE	3865-106	15.00	6WDE	3865-116
.6351" to .7600"	7WSE	3865-107	16.25	7WDE	3865-117
.7601" to 1.0100"	8WSE	3865-108	25.00	8WDE	3865-118
METRIC (mm)					
10mm to 1.90mm	1WSE	3865-121	\$ 6.25	1WDE	3865-131
1.91 to 4.56	2WSE	3865-122	6.88	2WDE	3865-132
4.57 to 7.14	3WSE	3865-123	7.50	3WDE	3865-133
7.15 to 10.30	4WSE	3865-124	8.13	4WDE	3865-134
10.31 to 12.94	5WSE	3865-125	11.25	5WDE	3865-135
12.95 to 16.12	6WSE	3865-126	15.00	6WDE	3865-136
16.13 to 19.30	7WSE	3865-127	16.25	7WDE	3865-137
19.31 to 25.64	8WSE	3865-128	25.00	8WDE	3865-138

Custom Taperlocks



Change gage members quickly. When you need to gage larger diameters, and need to change or replace gage members often, Taperlock plug gages are the perfect choice. To change gage members, simply pop-out existing members and press fit new members in your Taperlock handle. Each Taperlock handle size covers a wide range of gage sizes. Custom plug gage assemblies can be marked with your tool number. Go/NoGo assemblies include one line (up to 15 characters) of custom marking. These Taperlock plug gages are available up to 1.5" in all class tolerances and materials to meet unique requirements.

P.O.A.

SIZE RANGE	FEATURES:
.1050 to .1500" (2.67 to 3.81mm)	• Class XX, X, Y, Z, or ZZ
.1501 to .2300" (3.82 to 5.84mm)	• Go, NoGo tolerances
.2301 to .3650" (5.85 to 9.27mm)	• NIST traceable
.3651 to .5100" (9.28 to 12.95mm)	• Tool Steel; 60/62 Rc (Cold Stabilized)
.5101 to .8250" (12.96 to 20.95mm)	• Chrome Plated Tool Steel; 70.72 Rc
.8251 to 1.1350" (20.96 to 28.83mm)	• 2 microinch finish or better on Class XX, X
1.1351 to 1.5100" (28.84 to 38.35mm)	• Handles custom marked (1 line, up to 15 characters)
	• Inch Handles: Light Blue, Metric: Yellow
	• Certificate of Accuracy included

Custom Trilocks



For large dimensions. When you need to inspect large diameters, Trilock plug gages are the best solution. Much like Reversible plug gages, when one end wears out, simply turn the member around and continue gaging. This significantly increases the gaging life of your gage. Members are securely attached to your Trilock handle with mounting bolts. Custom plug gage assemblies can be marked with your tool number. Go/NoGo assemblies include one line (up to 15 characters) of custom marking. These Trilock plug gages are available up to 4" in all class tolerances and materials to meet unique requirements.

SIZE RANGE	FEATURES:
.7600 to .9470" (19.30 to 24.05mm)	• Class XX, X, Y, Z, or ZZ
.9471 to 1.1350" (24.06 to 28.83mm)	• Go, NoGo tolerances
1.1351 to 1.5100" (28.84 to 38.35mm)	• NIST traceable
1.5101 to 2.0100" (38.36 to 51.05mm)	• Tool Steel; 60/62 Rc (Cold Stabilized)
2.0101 to 2.5100" (51.06 to 63.75mm)	• Chrome Plated Tool Steel; 70.72 Rc
2.5101 to 3.0100" (63.76 to 76.45mm)	• 2 microinch finish or better on Class XX, X
3.0101 to 3.5100" (76.46 to 89.15mm)	• Handles custom marked (1 line, up to 15 characters)
3.5101 to 4.0100" (89.16 to 101.85mm)	• Inch Handles: Light Blue, Metric: Yellow
4.0101 to 4.5100" (101.86 to 114.55mm)	• Certificate of Accuracy included
4.5101 to 5.0100" (114.56 to 127.25mm)	
5.0101 to 5.5100" (127.26 to 139.95mm)	
5.5101 to 6.0100" (139.96 to 152.65mm)	

Bushings for Reversible Handles

BUSHING PRICES

Up to .5100" — \$ 2.00
.5101" and Up — \$ 2.75

RANGE	ORDER NO.	RANGE	ORDER NO.	RANGE	ORDER NO.
.0040" to .0060"	3865-201	.1661" to .1730"	3865-230	.4501" to .4650"	3865-259
.0061" to .0605"	3865-202	.1731" to .1800"	3865-231	.4651" to .4800"	3865-260
.0101" to .0130"	3865-203	.1801" to .1880"	3865-232	.4801" to .4950"	3865-261
.0131" to .0150"	3865-204	.1881" to .1960"	3865-233	.4951" to .5100"	3865-262
.0151" to .0200"	3865-205	.1961" to .2040"	3865-234	.5101" to .5320"	3865-263
.0201" to .0250"	3865-206	.2041" to .2120"	3865-235	.5321" to .5470"	3865-264
.0251" to .0300"	3865-207	.2121" to .2200"	3865-236	.5471" to .5630"	3865-265
.0301" to .0350"	3865-208	.2201" to .2280"	3865-237	.5631" to .5790"	3865-266
.0351" to .0400"	3865-209	.2281" to .2360"	3865-238	.5791" to .5940"	3865-267
.0401" to .0450"	3865-210	.2361" to .2440"	3865-239	.5941" to .6100"	3865-268
.0451" to .0500"	3865-211	.2441" to .2520"	3865-240	.6101" to .6250"	3865-269
.0501" to .0550"	3865-212	.2521" to .2610"	3865-241	.6251" to .6350"	3865-270
.0551" to .0600"	3865-213	.2611" to .2710"	3865-242	.6351" to .6560"	3865-271
.0601" to .0650"	3865-214	.2711" to .2810"	3865-243	.6561" to .6720"	3865-272
.0651" to .0700"	3865-215	.2811" to .2910"	3865-244	.6721" to .6880"	3865-273
.0700" to .0750"	3865-216	.2911" to .3010"	3865-245	.6881" to .7040"	3865-274
.0751" to .0820"	3865-217	.3011" to .3110"	3865-246	.7041" to .7190"	3865-275
.0821" to .0890"	3865-218	.3111" to .3210"	3865-247	.7191" to .7350"	3865-276
.0891" to .0960"	3865-219	.3211" to .3310"	3865-248	.7351" to .7500"	3865-277
.0961" to .1030"	3865-220	.3311" to .3410"	3865-249	.7501" to .7600"	3865-278
.1031" to .1100"	3865-221	.3411" to .3510"	3865-250	.7601" to .7810"	3865-279
.1101" to .1170"	3865-222	.3511" to .3610"	3865-251	.7811" to .8120"	3865-280
.1171" to .1240"	3865-223	.3611" to .3710"	3865-252	.8121" to .8430"	3865-281
.1241" to .1310"	3865-224	.3711" to .3820"	3865-253	.8431" to .8750"	3865-282
.1311" to .1380"	3865-225	.3821" to .3940"	3865-254	.8751" to .9060"	3865-283
.1380" to .1450"	3865-226	.3941" to .4060"	3865-255	.9061" to .9370"	3865-284
.1451" to .1520"	3865-227	.4061" to .4200"	3865-256	.9371" to .9680"	3865-285
.1521" to .1590"	3865-228	.4201" to .4350"	3865-257	.9681" to 1.0000"	3865-286
.1591" to .1660"	3865-229	.4351" to .4500"	3865-258		

Standard Class X-Plus Plug Gages

RANGE (INCH)	PRICE EACH
.0040 to .0150"	\$ 18.85
.0151 to .0250"	18.85
.0251 to .1100"	15.85
.1101 to .3900"	11.75
.3901 to .6350"	13.65
.6351 to .8350"	18.05
.8351 to 1.0000"	19.70

Sizes up to 1". Use as masters to calibrate measuring equipment or to gage parts directly. Either way, these Class X (+.00004", -.0000") plug gages are accurate, cost effective measurement standards, perfect for both the shop floor and Metrology laboratory. Included with Certificate of Accuracy. Available with Certificate of Calibration traceable to NIST.

FEATURES:

- Class X • 2" long • NIST traceable
- Single (GO) tolerance (+.00004, -.00000)
- .0005", or .02mm sizes
- Sizes available every.0001", to 1.0000"
- Tool Steel; 60/62 Rc (Cold Stabilized)
- 2 microinch finish or better • Within .00002" round
- Certificate of Accuracy included



Ring Gages

SIZE RANGE
.0150 to .0250" (0.38 to 0.64mm)
.0251 to .0400" (0.65 to 1.02mm)
.0401 to .0700" (1.03 to 1.78mm)
.0701 to .1500" (1.79 to 3.81mm)
.1501 to .2300" (3.82 to 5.84mm)
.2301 to .3650" (5.85 to 9.27mm)
.3651 to .5100" (9.28 to 12.95mm)
.5101 to .8250" (12.96 to 20.95mm)
.8251 to 1.1350" (20.96 to 28.83mm)
1.1351 to 1.5100" (28.84 to 38.35mm)
1.5101 to 2.0100" (38.36 to 51.05mm)
2.0101 to 2.5100" (51.06 to 63.75mm)
2.5101 to 3.0100" (63.76 to 76.45mm)
3.0101 to 3.5100" (76.46 to 89.15mm)
3.5101 to 4.0100" (89.16 to 101.85mm)
4.0101 to 4.7600" (101.86 to 120.90mm)
4.7601 to 5.5100" (120.91 to 139.85mm)
5.5101 to 6.2600" (139.86 to 159.00mm)
6.2601 to 7.0100" (159.01 to 178.05mm)
7.0101 to 7.7600" (178.06 to 197.10mm)
7.7601 to 8.5100" (197.11 to 216.15mm)
8.5101 to 9.2600" (216.16 to 235.20mm)
9.2601 to 10.0100" (235.21 to 254.25mm)
10.0101 to 10.7600" (254.26 to 273.30mm)
10.7601 to 11.5100" (273.31 to 292.35mm)

For Masters and Go/NoGo gaging. Use Vermont Gage ring gages to efficiently inspect external dimensions of manufactured parts. With a Go and NoGo ring, an inspector can quickly pass/fail without taking time-consuming readings from an indicator. These ring gages are also perfect for use as masters for bore gages and internal micrometers.

By using the same size master ring gage, you eliminate lead error when making measurements. A Certificate of Accuracy accompanies every gage, assuring size.

FEATURES:

- Steel or Chrome
- Class XX, X, Y, Z, or ZZ
- Go, NoGo tolerances
- NIST traceable
- Tool Steel; 60/62 Rc (Cold Stabilized)
- Chrome Plated Tool Steel; 70.72 Rc
- 2 microinch finish or better on Class XX, X
- Handles custom marked (1 line, up to 15 characters)
- Inch Handles: Light Blue, Metric: Yellow
- Certificate of Accuracy included



P.O.A.

Measuring Instruments



Outside Micrometers Made In China

- Light, smooth operation for convenient single hand operation
- Flatness: .00003" Parallelism: 0.00005" for 1" model
- Carbide tipped with ratchet stop and locking lever
- Spindle and anvil fully hardened and precision ground
- Clear graduations on hard chrome satin finish sleeve and thimble
- Standards included for 1-2" and above, and in sets
- Supplied in specially fitted case, with spanner wrench
- Heat insulated grip up to 4", lightweight tubular frame 5" and above



Inch Sizes

RANGE	GRAD.	ORDER NO.	PRICE
0-1"	.0001"	3100-330	\$16.00
1-2"	.0001"	3100-331	18.50
2-3"	.0001"	3100-332	21.25
3-4"	.0001"	3100-333	24.00
4-5"	.0001"	3100-334	27.50
5-6"	.0001"	3100-335	30.00
6-7"	.0001"	3100-336	45.00
7-8"	.0001"	3100-337	49.00
8-9"	.0001"	3100-338	52.00
9-10"	.0001"	3100-339	55.50
10-11"	.0001"	3100-340	57.50
11-12"	.0001"	3100-341	60.25

2



Inch Sets

RANGE	GRAD.	ORDER NO.	PRICE
0-3"	.0001"	3100-342	\$ 55.00
0-4"	.0001"	3100-343	69.00
0-6"	.0001"	3100-344	139.00
6-12"	.0001"	3100-345	325.00
0-12"	.0001"	3100-346	450.00



Outside Micrometers w/ Insulated Frames

FEATURES:

- Complete in "Shop Hardened" molded case
- Sizes over 1" supplied with standards
- Reading: .0001"
- Carbide tipped measuring faces.
- Ratchet thimble and locking nut.
- Microfine graduations.
- Meets or exceeds federal specs.

ORDER NUMBER	DESCRIPTION	PRICE
52-229-201	0-1" Outside Micrometer	\$27.33
52-229-202	1-2" Outside Micrometer	34.15
52-229-203	2-3" Outside Micrometer	40.20
52-229-213	0-3" Outside Micrometer Set	100.51

2



TESA

looc brown & sharpe.

Valuline Micrometers

FEATURES:

- Satin-chrome, fixed/friction thimble
- .0001" reading
- Straight-line graduations
- Spindle lock, Black enamel frame
- Tungsten carbide tipped anvils
- Meets Federal specs

ORDERING NUMBER	RANGE	B&S NUMBER	PRICE EACH
7125-943	0-1"	599-1-44	\$ 131.00
7125-944	1-2"	599-2-44	135.00
7125-945	2-3"	599-3-44	143.00
7125-946	3-4"	599-4-44	146.00
7125-947	4-5"	599-5-44	163.00
7125-948	5-6"	599-6-44	168.00
7125-976	6-7"	599-7-44	315.00
7125-977	7-8"	599-8-44	325.00

7



ORDERING NUMBER	RANGE	B&S NUMBER	PRICE EACH
7125-978	8-9"	599-9-44	\$333.00
7125-979	9-10"	599-10-44	342.00
7125-980	10-11"	599-11-44	348.00
7125-981	11-12"	599-12-44	356.00



TESA

looc brown & sharpe.

Valuline Micrometer Sets

Each micrometer set includes a custom fitted wooden case. Each individual micrometer in these sets has the same quality features listed above.

ORDERING NUMBER	SET DESCRIPTION	B&S NUMBER	PRICE EACH
7125-983	0-3" Without Standards	599-181-923	\$ 507.00
7125-984	0-3" With Standards	599-181-923-1	576.00
7125-985	0-4" Without Standards	599-181-924	653.00
7125-986	0-4" With Standards	599-181-924-1	760.00
7125-987	0-6" Without Standards	599-182-926	1057.00
7125-988	0-6" With Standards	599-182-926-1	1239.00

7



Measuring Instruments



TESA
TECHNOLOGY

brown & sharpe


Top-Of-The-Line: Satin-Chrome Micrometers

Silky-smooth, precise operation and functional design combine to continue the tradition of the Brown & Sharpe micrometer as the basic tool of choice for quality-minded individuals. Carbide measuring faces, convertible “friction” to “feel” thimble sleeves, easy-reading satin-chrome finish and spindle locks are standard on all micrometers listed below.

1” - 2” and 2” - 3” micrometers have insulated frames.

Where not provided, wooden cases and standards are available separately.

7

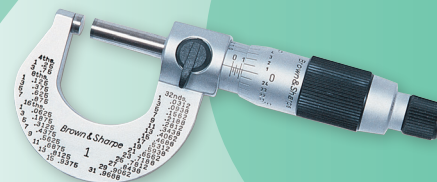

ORDERING NUMBER	RANGE	INCH (.0001" GRADUATIONS) DESCRIPTION	B&S NUMBER	PRICE EACH
7151-089	0-1"	Slant/line graduations	599-1-31	\$220.00
7151-090	0-1"	Straight/line graduations	599-1-32	222.00
7151-595	0-1"	Slant/line graduations with wooden case	599-1-31-9	241.00
7151-596	0-1"	Straight/line graduations with wooden case	599-1-32-9	243.00
7151-097	1-2"	Slant/line graduations with 1" Standard	599-2-31	276.00
7151-098	1-2"	Straight/line graduations with 1" Standard	599-2-32	278.00
7151-105	2-3"	Slant/line graduations with 2" Standard	599-3-31	286.00
7151-106	2-3"	Straight/line graduations with 2" Standard	599-3-32	292.00



TESA
TECHNOLOGY

brown & sharpe

0 to 3 Inch Chrome Frame Micrometer Sets

Each micrometer in the 0-3" Micrometer sets described here includes Brown & Sharpe's convertible “fixed/friction” thimble with satin-chrome finish, chrome frame, .0001" graduations, spindle lock and standards. Additional features are specified in the table below.

7

ORDERING NUMBER	B&S TOOL SET NUMBER	MICROMETERS IN EACH TOOL SET	PRICE EACH
7143-783	599-181-901	599-1-31; 599-2-31; 599-3-31	\$840.00
7143-784	599-181-901-1	599-1-32; 599-2-32; 599-3-32	850.00

.001" Grad.	.0001" Grad.	Slant-line	Straight-line	Chrome Frame	Enamel Frame	With Case	With Standards	Spindle Lock



Mitutoyo

Outside Micrometers - Series 101

Inch

12


ORDER NO.	RANGE	GRADUATION	ACCURACY	REMARKS	LIST PRICE
101-113	0-1"	.0001"	±.0001"	Ratchet Stop	\$133.00
101-114	1-2"	.0001"	±.0001"	Ratchet Stop with Standard	162.00
101-119	2-3"	.0001"	±.0001"	Ratchet Stop with Standard	177.00
101-120	3-4"	.0001"	±.00015"	Ratchet Stop with Standard	195.00
101-117	0-1"	.0001"	±.0001"	Friction Thimble	135.00
101-118	1-2"	.0001"	±.0001"	Friction Thimble w/ Standard	162.00

ACCURACY

- Flatness: .000024"/0.6µm.
- Parallelism: .00005" for up to .59"/1.3µm for up to 15mm, .00008" for up to 3"/2µm for up to 75mm .00012" for up to 4"/3µm for up to 100mm.
- Designed to be operated efficiently with one hand.

FEATURES

- Satin-finished chrome frame, tapered (on the anvil side) for hard-to-reach places.
- Carbide-tipped measuring faces.
- Supplied in fitted case

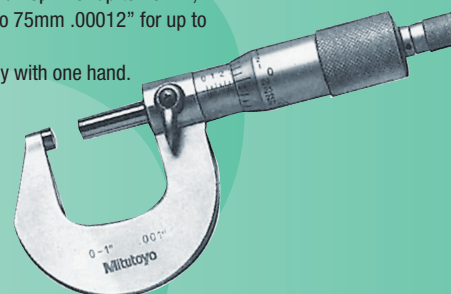

Measuring Instruments


Outside Micrometers – Series 103

FEATURES

- Carbide faces.
- Positive locking clamp.
- Ratchet stop or Friction Thimble for exact readings.
- Baked-enamel-finished frame.
- Clear graduations on satin-chrome finish.
- Complete with fitted carrying case.
- Inspection certificate provided.



103-135

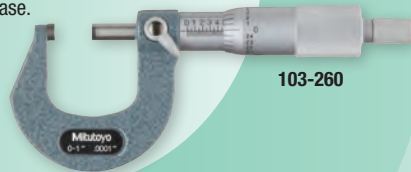

103-260

Inch

ORDER NO.	RANGE	GRADUATION	ACCURACY	REMARKS	LIST PRICE
103-131	0–1"	.0001"	±.0001"	Ratchet Stop type	\$118.00
103-132	1–2"	.0001"	±.0001"	Ratchet Stop with Standard	122.00
103-135	0–1"	.0001"	±.0001"	Friction Thimble type	119.00
103-136	1–2"	.0001"	±.0001"	Friction Thimble type with Standard	140.00
103-259	0–1"	.001"	±.0001"	Ratchet Stop type, tapered frame	109.00
103-177	0–1"	.001"	±.0001"	Ratchet Stop type	109.00
103-178	1–2"	.001"	±.0001"	Ratchet Stop type with Standard	126.00
103-179	2–3"	.001"	±.0001"	Ratchet Stop type with Standard	146.00
103-180	3–4"	.001"	±.00015"	Ratchet Stop type with Standard	170.00
103-181	4–5"	.001"	±.00015"	Ratchet Stop type with Standard	187.00
103-182	5–6"	.001"	±.00015"	Ratchet Stop type with Standard	204.00
103-183	6–7"	.001"	±.0002"	Ratchet Stop type with Standard	231.00
103-184	7–8"	.001"	±.0002"	Ratchet Stop type with Standard	248.00
103-185	8–9"	.001"	±.0002"	Ratchet Stop type with Standard	267.00
103-186	9–10"	.001"	±.00025"	Ratchet Stop type with Standard	282.00
103-187	10–11"	.001"	±.00025"	Ratchet Stop type with Standard	292.00
103-188	11–12"	.001"	±.00025"	Ratchet Stop type with Standard	306.00
103-189	12–13"	.001"	±.0003"	Ratchet Stop type with Standard	367.00
103-190	13–14"	.001"	±.0003"	Ratchet Stop type with Standard	407.00
103-191	14–15"	.001"	±.0003"	Ratchet Stop type with Standard	449.00
103-192	15–16"	.001"	±.00035"	Ratchet Stop type with Standard	487.00
103-193	16–17"	.001"	±.00035"	Ratchet Stop type with Standard	517.00
103-194	17–18"	.001"	±.00035"	Ratchet Stop type with Standard	556.00
103-195	18–19"	.001"	±.0004"	Ratchet Stop type with Standard	592.00
103-196	19–20"	.001"	±.0004"	Ratchet Stop type with Standard	621.00
103-197	20–21"	.001"	±.0004"	Ratchet Stop type with Standard	661.00
103-198	21–22"	.001"	±.00045"	Ratchet Stop type with Standard	698.00
103-199	22–23"	.001"	±.00045"	Ratchet Stop type with Standard	736.00
103-200	23–24"	.001"	±.00045"	Ratchet Stop type with Standard	778.00
103-201	24–25"	.001"	±.0005"	Ratchet Stop type with Standard	820.00
103-202	25–26"	.001"	±.0005"	Ratchet Stop type with Standard	855.00
103-203	26–27"	.001"	±.0005"	Ratchet Stop type with Standard	1040.00
103-204	27–28"	.001"	±.00055"	Ratchet Stop type with Standard	983.00
103-205	28–29"	.001"	±.00055"	Ratchet Stop type with Standard	1020.00
103-206	29–30"	.001"	±.00055"	Ratchet Stop type with Standard	1170.00
103-207	30–31"	.001"	±.0006"	Ratchet Stop type with Standard	1130.00
103-208	31–32"	.001"	±.0006"	Ratchet Stop type with Standard	1320.00
103-209	32–33"	.001"	±.0006"	Ratchet Stop type with Standard	1360.00
103-210	33–34"	.001"	±.00065"	Ratchet Stop type with Standard	1410.00
103-211	34–35"	.001"	±.00065"	Ratchet Stop type with Standard	1440.00
103-212	35–36"	.001"	±.00065"	Ratchet Stop type with Standard	1510.00
103-213	36–37"	.001"	±.0007"	Ratchet Stop type with Standard	1610.00
103-214	37–38"	.001"	±.0007"	Ratchet Stop type with Standard	1660.00
103-215	38–39"	.001"	±.0007"	Ratchet Stop type with Standard	1710.00
103-216	39–40"	.001"	±.00075"	Ratchet Stop type with Standard	1800.00
103-260	0–1"	.0001"	±.0001"	Ratchet Stop type, tapered frame	118.00
103-262	1–2"	.0001"	±.0001"	Ratchet Stop type with Standard	138.00
103-217	2–3"	.0001"	±.0001"	Ratchet Stop type with Standard	154.00
103-218	3–4"	.0001"	±.00015"	Ratchet Stop type with Standard	177.00
103-219	4–5"	.0001"	±.00015"	Ratchet Stop type with Standard	192.00
103-220	5–6"	.0001"	±.00015"	Ratchet Stop type with Standard	213.00
103-221	6–7"	.0001"	±.0002"	Ratchet Stop type with Standard	241.00
103-222	7–8"	.0001"	±.0002"	Ratchet Stop type with Standard	254.00
103-223	8–9"	.0001"	±.0002"	Ratchet Stop type with Standard	282.00
103-224	9–10"	.0001"	±.00025"	Ratchet Stop type with Standard	292.00
103-225	10–11"	.0001"	±.00025"	Ratchet Stop type with Standard	306.00
103-226	11–12"	.0001"	±.00025"	Ratchet Stop type with Standard	319.00

Mitutoyo

12



103-907-40

ORDER No. 103-929 (0–3" Set)

List Price \$391.00

ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
103-177	0–1"	.001"	Ratchet Stop type with Standards	\$109.00
103-178	1–2"	.001"		126.00
103-179	2–3"	.001"		146.00

ORDER No. 103-904-10 (0–6" Set)

List Price \$998.00

ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
103-177	0–1"	.001"	Ratchet Stop type with 5 Standards	\$109.00
103-178	1–2"	.001"		126.00
103-179	2–3"	.001"		146.00
103-180	3–4"	.001"		170.00
103-181	4–5"	.001"		187.00
103-182	5–6"	.001"		204.00

ORDER No. 103-922 (0–3" Set)

List Price . . . \$431.00

ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
103-135	0–1"	.0001"	Friction Thimble type	\$119.00
103-136	1–2"	.0001"		140.00
103-217	2–3"	.0001"		154.00

ORDER No. 103-907-40 (0–6" Set)

List Price \$876.00

ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
103-135	0–1"	.0001"	Friction Thimble type	\$119.00
103-136	1–2"	.0001"		140.00
103-217	2–3"	.0001"		154.00
103-218	3–4"	.0001"	Ratchet Stop type with Standards	177.00
103-219	4–5"	.0001"		192.00
103-220	5–6"	.0001"		213.00

ORDER No. 103-909 (6"–12" Set)

List Price \$1750.00

ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
103-221	6–7"	.0001"	Ratchet Stop type with Standards	\$241.00
103-222	7–8"	.0001"		254.00
103-223	8–9"	.0001"		282.00
103-224	9–10"	.0001"		292.00
103-225	10–11"	.0001"		306.00
103-226	11–12"	.0001"		319.00

ORDER No. 103-908-40 (0–12" Set)

List Price \$2420.00

ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
103-135	0–1"	.0001"	Friction Thimble type	\$119.00
103-136	1–2"	.0001"		140.00
103-217	2–3"	.0001"		154.00
103-218	3–4"	.0001"	Ratchet Stop type with Standards	177.00
103-219	4–5"	.0001"		192.00
103-220	5–6"	.0001"		213.00
103-221	6–7"	.0001"		241.00
103-222	7–8"	.0001"		254.00
103-223	8–9"	.0001"		282.00
103-224	9–10"	.0001"		292.00
103-225	10–11"	.0001"		306.00
103-226	11–12"	.0001"		319.00

Measuring Instruments

Mitutoyo

Digimatic Micrometers Series 293 – IP65

FEATURES:

- IP65 protection level, enabling use in environments exposed to cutting oil, etc.*
- *Anti-corrosion treatment is required after use.

Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
293-330-30	0–1" 0–25.4mm	.00005" 0.001mm	±.00005" ±.00005mm	with SPC output Ratchet Stop	\$240.00
293-331-30	1–2" 25.4–50.8mm	.00005" 0.001mm	±.00005" ±.00005mm	w/ SPC output and Std. Ratchet Stop	283.00
293-332-30	2–3" 50.8–76.2mm	.00005" 0.001mm	±.00005" ±.00005mm	w/ SPC output and Std. Ratchet Stop	349.00
293-333-30	3–4" 76.2–101.6mm	.00005" 0.001mm	±.0001" ±.0001mm	w/ SPC output and Std. Ratchet Stop	376.00
293-350-30	4–5" 101.6–127.0mm	.0001" 0.001mm	±.0001" ±.0001mm	w/ SPC output and Std. Ratchet Stop	462.00
293-351-30	5–6" 127.0–152.4mm	.0001" 0.001mm	±.0001" ±.0001mm	w/ SPC output and Std. Ratchet Stop	482.00
293-352-30	6–7" 152.4–177.8mm	.0001" 0.001mm	±.00015" ±.00015mm	w/ SPC output and Std. Ratchet Stop	491.00
293-353-30	7–8" 177.8–203.2mm	.0001" 0.001mm	±.00015" ±.00015mm	w/ SPC output and Std. Ratchet Stop	527.00

- Measurement data output function is available with a water-resistant connection cable.
- Auto power ON/OFF function.
- A nonslip surface with raised dots is employed for the frame cover and surface panel to achieve stable handheld measurement
- Certificate of inspection* is included. (2" /50mm or less range models)
- *Not the type used to obtain calibration certificates.
- With a standard bar except for 0–1"/0–25mm model.
- Supplied in fitted case. Plastic case up to 6"/150mm, wooden box over 6"/150mm

FUNCTIONS AVAILABLE:

- Origin setting, Inch/mm selection
- Zero-setting • Error alarm
- Data Hold only with SPC Models
- Auto-sleep • Data output
- Can be linked to the SPC system
- Carbide-tipped measuring faces.



293-348-30
Standard
Friction
Thimble

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
293-354-30	8–9" 203.2–228.6mm	0.0001" 0.001mm	±.00015" ±.00015mm	w/ SPC output and Std. Ratchet Stop	\$547.00
293-355-30	9–10" mm	0.0001" mm	±.0002" ±.0002mm	w/ SPC output and Std. Ratchet Stop	571.00
293-356-30	10–11" mm	0.0001" mm	±.0002" ±.0002mm	w/ SPC output and Std. Ratchet Stop	575.00
293-357-30	11–12" mm	0.0001" mm	±.0002" ±.0002mm	w/ SPC output and Std. Ratchet Stop	592.00
293-340-30	0–1" 0–25.4mm	.00005" 0.001mm	±.00005" ±.00005mm	without SPC output Ratchet Stop	187.00
293-344-30	0–1" 0–25.4mm	.00005" 0.001mm	±.00005" ±.00005mm	without SPC output Ratchet-Friction Thimble	187.00
293-348-30	0–1" 0–25.4mm	.00005" 0.001mm	±.00005" ±.00005mm	without SPC output Friction Thimble	187.00
293-349-30	0–1" 0–25.4mm	.0001" 0.001mm	±.00005" ±.00005mm	without SPC output Ratchet-Friction Thimble	187.00

Replacement Battery: 938882 (1 pc). USB Direct Cable: 06ADV380B (USB-ITN-B) 2M

Fowler

XTRA-VALUE II Electronic Micrometers

FEATURES:

- Jet black, grey enamel finish
- Large LCD display, 8.5mm
- Resolution: .00005"/.001mm
- Accuracy: ±.00016"/.004mm (up to 2") • Ratchet thimble
- Carbide measuring faces.
- Absolute and incremental modes
- Includes shop hardened case



ORDER NUMBER	RANGE/ DESCRIPTION	PRICE EACH
54-870-001	0–1"/0–25mm Elec. Micrometer	\$62.24
54-870-002	1–2"/0–50mm Elec. Micrometer	76.66
54-870-003	2–3"/0–75mm Elec. Micrometer	91.24
54-870-103	0–3"/0–75mm Elec. Micrometer Set	208.85

Fowler

LIFETIME WARRANTY

Rapid-Mic Quick-Displacement Electronic Micrometer

FEATURES:

- Auto On/Off
- Position recall
- IP67 with or without data cable.
- Delrin quick displacement thimble
- Adjustable measuring force, 5N/10N
- Menu customizable with free software • Non-rotating spindle, 12mm/spindle rotation
- USB output • Carbide anvils • Extended Range 0–30mm, 30–66mm and 66–102mm
- Blade anvils and speciality mics are available, contact Fowler Technical Department



ORDER NO.	DESCRIPTION	MAX ERROR	PRICE
54-815-030	0–1.18"/0–30mm	0.00012"/.003mm	\$514.79

TESA

TECHNOLOGY

brown & sharpe

Micromaster – MM2000 Digital Micrometer

FEATURES:

- Range: 0 – 1.2"/0 – 30mm
- Resolution: .00005"/1µm
- Large, easy-to-read 1/4" digital display
- Automatic shut-off after 10 minutes
- Tungsten carbide faces, convertible friction/feel thimble, spindle lock
- Preset absolute and differential modes
- Battery life of 1 to 2 years of normal usage
- Meets or exceeds applicable Federal and DIN standards
- Available in water resistant and RS-232 models
- Complete with shop-hardened, fitted case



DESCRIP.	ACCURACY	WATER RESISTANT	RS232 OUTPUT	B&S NO.	ORDERING NO.	PRICE EACH
0–1.2"	.00016"	N	N	599-100	7127-266	\$360.00
0–1.2"	.00016"	Y	N	599-125	7127-271	373.00
0–1.2"	.00016"	Y	Y	599-125RS	7127-267	394.00
1–2"	.0002"	Y	N	599-126	7127-272	463.00
1–2"	.0002"	Y	Y	599-126RS	7127-268	466.00
2–3"	.0002"	Y	N	599-127	7127-273	501.00
2–3"	.0002"	Y	Y	599-127RS	7127-269	504.00
3–4"	.0002"	Y	N	599-128	7127-274	529.00
3–4"	.0002"	Y	Y	599-128RS	7127-270	532.00

Measuring Instruments

Pittsburg[®] Digital Electronic Outside Micrometer

RANGE	RESOLUTION	ORDER NO.	PRICE
0-1"/0-25mm	.00005"/.001"mm	3100-590	\$89.00

- Large, easy to read LCD display
- Set zero at any point along spindle
- Automatic power off
- Carbide tipped with ratchet stop and locking lever
- Hardened and precision ground anvil and spindle
- Hard chrome satin finish sleeve and thimble
- Supplied in specially fitted case



Fowler IP54 Electronic Micrometers

ORDER NUMBER	DESCRIPTION	PRICE
54-860-001-1	0—1" Electronic Micrometer	\$100.42
54-860-002-1	1—2" Electronic Micrometer	118.13
54-860-003-1	2—3" Electronic Micrometer	133.92
54-860-103-1	0—3" Electronic Micrometer Set	348.09



- Protecte to IP54 specification.
- Large LCD display.
- Automatic switch off.
- Resolution: .00005"/.001mm.
- Direct RS232 output.
- Complete with case
- Sizes over 1" supplied with standards.



Mitutoyo Wide Range Outside Micrometers – Series 104 & 340 – IP65

FEATURES

- Wide measuring range with interchangeable anvils.
- Carbide-tipped spindle.
- Provided with Ratchet Stop for constant force.


DIGIMATIC FUNCTIONS

340 Series - IP65

- Inch/mm •Preset
- Zero/ABS •Data Send/Hold

ACCURACY

- Flatness: within .000024"/0.6µm for up to 12"/300mm within .00004"/1µm for up to 40"/1000mm.
- Parallelism: .00008" + .00004" x (L*/4") / (2 + L/100)µm (*truncated after decimal pt.)
- Measuring Accuracy: ± (.0002" + .00005" x L*/3") / ± (4 + L/75)µm (*truncated after decimal pt.), L = maximum measuring length.

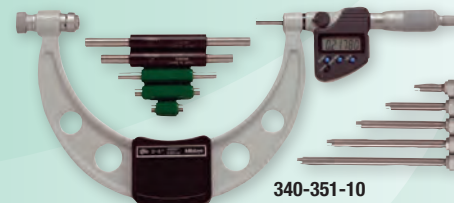


Digimatic Wide Range Outside Micrometers

ORDER NO.	RANGE	LCD RESOLUTION	REMARKS	LIST PRICE
340-351-30	0-6" 0-152.4mm	.00005" 0.001mm	with 6 Anvils & 5 Standards with SPC output	\$732.00
340-352-30	6-12" 152.4-304.8mm	.00005" 0.001mm	with 6 Anvils & 6 Standards with SPC output	900.00

Wide Range Outside Micrometers


ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
104-137	0-6"	.001"	with 6 Anvils & 5 Standards	\$ 386.00
104-138	6-12"	.001"	with 6 Anvils & 6 Standards	698.00
104-203	24-30"	.001"	with 6 Anvils & 6 Standards	1340.00
104-204	30-36"	.001"	with 6 Anvils & 6 Standards	1470.00
104-205	36-42"	.001"	with 6 Anvils & 6 Standards	1610.00
104-152	12-16"	.001"	with 4 Anvils & 4 Standards	707.00
104-153	16-20"	.001"	with 4 Anvils & 4 Standards	875.00
104-154	20-24"	.001"	with 4 Anvils & 4 Standards	1040.00

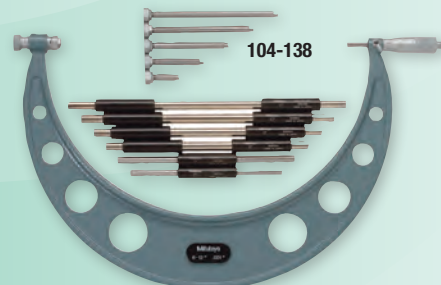

Fowler EZ-Read Interchangeable Anvil Micrometer Sets

- Accuracy: .00024"
- Graduation: .0001"
- Spindle & thread hardened & ground.
- Supplied with 6 anvils.
- Complete in case.

ORDER NUMBER	DESCRIPTION	PRICE
52-401-206	0-6"	\$181.40
52-401-207	6-12"	226.61

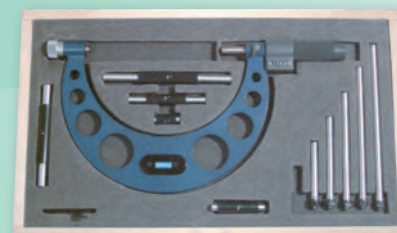

Mitutoyo Deep Throat Micrometers – Series 118

FEATURES

- Measures thickness of sheet metal, paper, plastic, and rubber parts.
- Carbide-tipped measuring faces.
- Provided with Ratchet Stop for constant force.

Inch

ORDER NO.	RANGE	RESOLUTION	ACCURACY	REMARKS	LIST PRICE
118-129	0-1"	.0001"	±.0002"	Depth of Throat: 6"	\$240.00
118-107	0-1"	.001"	±.00025"	Depth of Throat: 12"	398.00

Special modifications to spindle/anvil tips available upon request.



Measuring Instruments

Pittsburg[®] Digital Outside Micrometer

RANGE	GRAD.	ORDER NO.	PRICE
0-1"	.0001"	3100-575	\$36.50
1-2"	.0001"	3100-576	45.75
2-3"	.0001"	3100-577	55.00
0-3" Set	.0001"	3100-582	129.00

- Rapid and simple reading. Fast zero adjustment
- .0001" graduations on vernier scale, .001" on digital counter
- Flatness: .00003" Parallelism: 0.00005" for 1" model
- Carbide tipped with ratchet stop and locking nut
- Hardened and precision ground anvil and spindle
- Crisp, clear graduations on hard chrome satin finish sleeve and thimble
- Standards included for 1-2" and above, and in sets
- Supplied in specially fitted case, with spanner wrench
- Heat insulated grip plates



Mitutoyo Digital Outside Micrometers – Series 193

Mechanical Digit Counter Readout

FEATURES

- Mechanical counter for quick and error-free reading.
- Direct readout on the counter to .001"/0.01mm.
- Carbide-tipped measuring faces.

Note: 0-1" and 1-2" models have Friction Thimbles. All others have Ratchet Stop. Metric available on request.



193-211

ACCURACY

- Flatness: Inch models .000024" for models up to 12". Metric models 0.6µm for models up to 300mm.
- Parallelism: Inch models .00008" + .00004" x (L*/4") (*truncated after decimal pt.) Metric models (2 + L/100)µm.



Inch

ORDER NO.	RANGE	GRADUATION	ACCURACY	REMARKS	LIST PRICE
193-211	0-1"	.0001"	±.0001"	Friction Thimble	\$186.00
193-212	1-2"	.0001"	±.0001"	with standard, Friction Thimble	219.00
193-213	2-3"	.0001"	±.0001"	with standard, Ratchet Stop	245.00
193-214	3-4"	.0001"	±.00015"	with standard, Ratchet Stop	271.00

Digital Micrometer Set

ORDER NO.	RANGE	GRADUATION	ACCURACY	REMARKS	LIST PRICE
193-923	0-3"	.0001"	±.0001"	with standard	\$650.00

Fowler Digit Counter Micrometers

ORDER NUMBER	DESCRIPTION	PRICE
52-224-001	0-1" Outside Micrometer	\$54.39
52-224-002	1-2" Outside Micrometer	60.04
52-224-003	2-3" Outside Micrometer	64.79
52-224-103	0-3" Outside Micrometer Set	150.28

- Digital counter
- Resolution: .0001",
- Microfine graduations on satin chrome finish
- Carbide tipped measuring faces
- Positive locking nut on spindle
- Sizes over 1" supplied with standards



Mitutoyo Uni-Mike – Series 117 & 317 - IP65 Interchangeable Anvil Type

Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
317-351-30	0-1"	.00005"-0.001mm	±.0002"	Friction Thimble w/Flat & Rod Anvils	\$529.00
317-352-30	1-2"	.00005"-0.001mm	±.0002"	Friction Thimble w/Flat & Rod Anvils plus Standard	538.00

* For SPC output order connecting cable 05CZA662 (1m) or 05CZA663 (2m). Replacement Battery: 938882.

Inch

ORDER NO.	RANGE	GRADUATION	ACCURACY	REMARKS	LIST PRICE
117-107*	0-1"	.0001"	±.0002"	w/Flat & Rod Anvils	\$208.00
117-108*	1-2"	.0001"	±.0002"	w/Flat & Rod Anvils plus Standard	244.00

* 117-107 and 117-108 with Friction Thimble. Replacement Anvils: Rod Anvil 201217; Flat Anvil 201216; Optional V-Anvil 201218; Optional 1" Disc Anvil 950758.



317-351-30



117 Series

FEATURES

- Measures tube thickness, shoulder-edge distance, rivet head height, etc. with interchangeable anvils (flat anvil, rod anvil, V-anvil).
- The 317 series provides digital readout to .00005"/0.001mm and can be linked to the SPC system.

ACCURACY

- Flatness: Measuring face of spindle: .000024"/0.6µm. Bottom of base: .00008"/2µm.
- Parallelism: .00012"/3µm.

Measuring Instruments

Mitutoyo

Screw Thread Micrometers – Series 126 & 326

Digimatic Screw Thread Micrometers

Inch/Metric (No Anvils)

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
326-351-30	0–1"–0–25.4mm	.00005"–0.001mm	±.0002"	—	\$666.00
326-352-30	1–2"–25.4–50.8mm	.00005"–0.001mm	±.0002"	with Standard	705.00

For SPC output order connecting cable 05CZA662 (1m) or 05CZA663 (2m).
Replacement Battery: 938882.

Screw Thread Micrometers

Inch (No Anvils)

ORDER NO.	RANGE	GRADUATION	*ACCURACY	REMARKS	LIST PRICE
126-137	0–1"	.001"	±.0002"	—	\$449.00
126-138	1–2"	.001"	±.0002"	with Standard	537.00

Inch (With Anvil Set)

126-901	0–1"	.001"	±.0002"	with Anvil Set (126-800)	\$919.00
126-902	1–2"	.001"	±.0002"	with Anvil Set (126-800) with Standard	1010.00

* Read Screw only. Sizes available up to 7".

Anvils (Accessories – Must select at least one pair)

ORDER NO.	THREADS (PER INCH)	PITCH (INCH/MM)	REMARKS	LIST PRICE
126-801	64–48 (M1)	.016–.019"/0.4–0.5mm	1 Pair	\$78.30
126-802	44–28 (M2)	.024–.035"/0.6–0.9mm	1 Pair	78.30
126-803	24–14 (M3)	.04–.068"/1.0–1.75mm	1 Pair	78.30
126-804	13–9 (M4)	.079–.118"/2.0–3.0mm	1 Pair	78.30
126-805	8–5 (M5)	.138–.196"/3.5–5.0mm	1 Pair	78.30
126-806	4.5–3.5 (M6)	.217–.275"/5.5–7.0mm	1 Pair	78.30
126-800	64–3.5	.016–.275"/0.4–7.0mm	Set	469.00

Pittsburg[®] ALLEGHANY Screw Thread Micrometers

- Every thousandth is numbered for easy reading
- Deluxe heat-insulator on satin chrome finished forged steel frame, tapered for hard to get at places
- Ratchet stop with positive locking clamp
- Micro-fine graduations on satin chrome finish
- V-Anvil and a conical spindle made of high grade steel, hardened and precision ground
- Includes fitted case, with standard supplied for 1-2"

RANGE	GRAD.	ANVILS	ORDER NO.	PRICE
0–1"	.001"	1–5	3100-180	\$106.01
1–2"	.001"	2–6	3100-181	115.86



Anvils – UST 60 Deg .0001"


ANVIL NO.	RANGE	ORDER NO.	PRICE
1	64-48	3100-184†	\$19.05
5	8-5	3100-188†	19.05
6	4.5-3	3100-189†	19.05
Anvil Set		3100-179	141.05

† Limited Quantities

Pittsburg[®] ALLEGHANY Indicating Micrometers

- Every thousandth is numbered for easy setting
- Quick and easy zero adjustment
- Retracting button convenient to operator's thumb
- Tolerance hands can be set as desired
- Microlapped finish carbide measuring faces
- Jeweled bearings
- Hardened and precision ground anvil and spindle
- Hard chrome satin finish sleeve and thimble
- Supplied in specially fitted case

RANGE	GRAD.	ORDER NO.	CHINA	PRICE
0–1"	.0001"	3100-234		\$154.50
1–2"	.0001"	3100-236		176.00

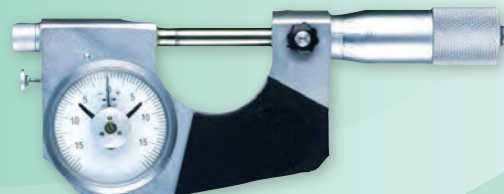

Mitutoyo Indicating Micrometer – Series 510

FEATURES

- User-friendly, improved durability, accuracy
- Waterproof structure conforms to IP-54
- Scratch-resistant hard coated crystal
- Easy-to-read large dial graduations
- Zero-adjustment screw on backside

Inch

ORDER NO.	RANGE	GRADUATION OF INDICATOR	RANGE OF INDICATOR	TOTAL ACCURACY	LIST PRICE
510-131*	0–1"	.00005"	± .0023"	± .0001"	\$848.00
510-132	1–2"	.00005"	± .0023"	± .0001"	913.00
510-133	2–3"	.00005"	± .0023"	± .0001"	1020.00
510-134	3–4"	.00005"	± .0023"	± .0001"	1110.00

*Retractable anvil button on the right side (510-131).



510-131



126-137

326-351-30

FEATURES

- Interchangeable tips for measuring various screw threads.
- The 326 series provides digital readout to .00005"/0.001mm and can be linked to the SPC system.
- Provided with a Ratchet Stop for constant force.
- Provided with a standard bar for zero point adjustment.
- Interchangeable tips are optional.

ACCURACY

- Spindle feed error: .00012"/3μm.

Interchangeable V-Anvil Type for Measuring Pitch Diameter

Each anvil can be used for both metric and unified external threads. The correct pair of anvils must be selected and inserted in the hollow micrometer spindle and anvil. The micrometer anvil is fully adjustable by the knurled knob located on the anvil side of the frame. Zero set the micrometer with this knob whenever the anvil is interchanged.

- 60 degree V-Anvil and Conical Spindle are made of high-grade special steel, hardened and precision ground.
- Furnished complete with fitted carrying case.

Measuring Instruments



TESA
TECHNOLOGY

brown & sharpe.

Blade Micrometers

- Ideal for measuring keyways, grooves, form tool diameters and parts with shallow depths.
- Blades are .017" thick and measure to a depth of 7/32" (5.5mm).
- Blades are hardened and lapped for accuracy and durability.
- Non-rotating spindle.
- Graduated to .001".



7

ORDER NO.	RANGE	BLADE MIKES NUMBER	PRICE
7125-352	0-1"	599-219-2	\$361.00
7125-357	1-2"	599-220-2	366.00
7125-616	2-3"	599-221-2	389.00
7125-617	3-4"	599-222-2	399.00

Mitutoyo

Blade Micrometers - Series 122 & 422 Non-Rotating Spindle

FEATURES

- The anvil and the spindle have a blade for measuring the groove diameter of shafts, keyways, and other hard-to-reach portions.
- The 422 series provides digital readout to .00005"/0.001mm and can be linked to the SPC system.
- All Digimatic models provide SPC output
- Non-rotating spindle.

ACCURACY

- Parallelism: .00012" for models up to 2", .00012" + .00004" x (L*/4") for over 2", 3µm models for up to 50mm, (3 + L/100)µm for models over 50mm.
- (*truncated after decimal point).
- L = maximum measuring length.

Digimatic Blade Micrometer

Inch/Metric



422-330-30

7

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	BLADE DIMENSION	LIST PRICE
422-330-30	0-1" 0-25.4mm	.00005" 0.001mm	±.00015"	.030"	\$780.00
422-331-30	1-2" 25.4-50.8mm	.00005" 0.001mm	±.00015"	.030"	835.00

* For SPC output order connecting cable 05CZA662 (1m) or 05CZA663 (2m).
Special Oversized models up to 12" available upon request
(Based on models 422-330-30 & 122-125).

Blade Micrometer

Inch



122-125

12

ORDER NO.	RANGE	GRADUATION	ACCURACY	BLADE DIMENSION	LIST PRICE
122-125	0-1"	.0001"	±.00015"	.030"	\$301.00
122-126	1-2"	.0001"	±.00015"	.030"	315.00
122-127	2-3"	.0001"	±.00015"	.030"	331.00
122-128	3-4"	.0001"	±.0002"	.030"	353.00

Mitutoyo

Spherical Face Micrometers Series 115 & 395-IP65

Digimatic Spherical Face Micrometers

Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
395-351-30	0-1" 0-25.4mm	.00005" 0.001mm	±.0001"	Spherical anvil type	\$397.00
395-352-30	1-2" 25.4-50.8mm	.00005" 0.001mm	±.0001"	Spherical anvil type w/Standard	425.00
395-371-30	0-1" 0-25.4mm	.00005" 0.001mm	±.0001"	Spherical anvil & spindle type	410.00
395-372-30	1-2" 25.4-50.8mm	.00005" 0.001mm	±.0001"	Spherical anvil & spindle type with Standard	435.00

For SPC output order connecting cable 05CZA662 (1m) or 05CZA663 (2m).
Replacement Battery: 938882.

Spherical Face Micrometers

ORDER NO.	RANGE	GRADUATION	ACCURACY	REMARKS	LIST PRICE
115-153	0-1"	.0001"	±.00015"	Spherical anvil type	\$ 134.00
115-253	0-1"	.0001"	±.00015"	Spherical anvil & spindle type	146.00

FEATURES

- Spherical Anvil Micrometers are especially useful in measuring the wall thickness of small parts such as sleeves, collars, tubings and various cylindrical workpieces. They are also used to measure dimensions from the inside of holes to outside edges. The spherical anvil contacts the inside curved surface providing a single point contact and permitting accurate gaging of the wall thickness to .0001".
- Ratchet thimble for constant force.
- Carbide-tipped measuring faces.
- The 395 series can be linked to the SPC system.
- Provided with a constant-force device.
- Digimatic functions same as the Digimatic Outside Micrometers series 293 at the first pages of this section.



395-371-30



115-153

Measuring Instruments

Mitutoyo

Point Micrometers – Series 112 & 342-IP65

FEATURES

- Pointed spindle and anvil for measuring the web thickness of drills, small grooves, and other hard-to-reach dimensions.
- Radius of curvature of measuring points: .012" (0.3mm).
- The 342 series provides digital readout to .00005"/0.001mm and can be linked to the SPC system.
- Provided with Ratchet Stop for constant force.

Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
342-351-30	0–1" 0–25.4mm	.00005" 0.001mm	±.0001"	w/SPC output & Carbide points. A=15°, L=.394"	\$462.00
342-352-30	1–2" 25.4–50.8mm	.00005" 0.001mm	±.0001"	w/SPC output & Standard with Carbide points. A=15°, L=.394"	515.00
342-361-30	0–1" 0–25.4mm	.00005" 0.001mm	±.0001"	w/SPC output & Carbide points. A=30°, L=.430"	462.00
342-362-30	1–2" 25.4–50.8mm	.00005" 0.001mm	±.0001"	w/SPC output & Standard with Carbide points. A=30°, L=.430"	504.00

For SPC output, order Connecting Cable 05CZA662 (1m) or 05CZA663 (2m). Replacement Battery: 938882.

Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
112-177	0–1" .001"	.001"	±.00015"	without Carbide points A=15°, L=.394"	224.00
112-225	0–1" .001"	.001"	±.00015"	without Carbide points A=30°, L=.430"	170.00



342-361-30



112 Series

Mitutoyo

Tubing Micrometers - Series 115 & 395-IP65


ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
395-363-30	0–1" 0–25.4mm	.00005" 0.001mm	±.00015"	Anvil type: B	\$451.00
395-364-30	0–1" 0–25.4mm	.00005" 0.001mm	±.00015"	Anvil type: A	451.00

For SPC output order connecting cable 05CZA662 (1m) or 05CZA663 (2m).

Replacement Battery: 938882 (1 pc).

FEATURES

- The 395 series can be linked to the SPC system.
- Provided with a constant-force device.



ORDER NO.	RANGE	GRADUATION	ACCURACY	ANVIL DIA.	LIST PRICE
115-313	0–1" .0001"	.0001"	±.00015"	.187"	\$147.00



115-313



395-363-30



TESA

brown & sharpe

Micrometer for Tubing and Curved Surfaces

Spherical anvil and measuring spindle makes this micrometer ideal for measuring convex curves directly without having to subtract the diameter of a ball. Measure wall thickness of tubing with inside diameters as small as 3/8". Straight/line barrel graduations and glare-free satin-chrome finished thimble. Convertible "friction" to "feel" thimble for a choice in measuring action.

ORDERING NO.	RANGE	GRADUATION	B&S NUMBER	PRICE
7125-623	0–1" .0001"	.0001"	599-228-2-1	\$179.00



IP65

Mitutoyo

Disc Micrometers– Series 123, 223, 323 -IP65

Rotating Spindle Type

Digital Disc Micrometers – (Mechanical)

Inch

ORDER NO.	RANGE	GRAD.	ACCURACY	REMARKS	LIST PRICE
223-125	0–1" .001"	.001"	±.0002"	Disc Diam.: .79"	\$314.00

FEATURES

- Measures root tangent length of spur & helical gears
- The 323 series can be linked to the SPC system.
- .03" edge thickness to enter narrow recesses.
- With heat-insulating grip cover on frame.
- Supplied with fitted carrying case.



323-350-30



123-125

Disc Micrometers

Inch

ORDER NO.	RANGE	GRADUATION	ACCURACY	REMARKS	LIST PRICE
123-125	0–1" .001"	.001"	±.0002"	Disc Diameter: .79"	\$244.00
123-126	1–2" .001"	.001"	±.0002"	Disc Diameter: .79" w/Standard	269.00
123-127	2–3" .001"	.001"	±.0003"	Disc Diameter: .79" w/Standard	285.00
123-128	3–4" .001"	.001"	±.0003"	Disc Diameter: .79" w/Standard	311.00

Inch/Metric

ORDER NO.	RANGE	RESOLUTION	ACCURACY	REMARKS	LIST PRICE
323-350-30	0–1" 0–25.4mm	.00005" 0.001mm	±.0002"	Disc diam. .79"	\$499.00
323-351-30	1–2" 25.4–50.8mm	.00005" 0.001mm	±.0002"	Disc diam. .79" with Standard	560.00

For SPC output order connecting cable 05CZA662 (1m) or 05CZA663 (2m). Replacement Battery: 938882.



TESA

brown & sharpe

Disc Micrometers

For measuring narrow grooves and other recessed features from .015" thick. Discs are 1/2" in diameter, 1/16" thick in the center and .015" thick at the edge. With ring lock and satin chrome finish for easy reading.

ORDER NO.	RANGE	GRADS.	B&S NO.	PRICE
7125-618	0–1" .001"	.001"	599-215-4	\$312.00



Measuring Instruments



TESA
TECHNOLOGY



brown & sharpe

Flange Micrometers

One inch (25mm) diameter flanges make it easy to measure gear pitches, over shoulders, into grooves, from slots to a reference edge, and a wide variety of other measurements not possible with standard micrometers. Comes with ring lock.

• Inch (.001" Graduations)

ORDER NO.	RANGE	GRADS.	B&S NO.	PRICE
7125-619	0-1"	.001"	599-224-1	\$430.00



TESA
TECHNOLOGY



brown & sharpe

3-Flute (60° Angle) Micrometers

Check Out-of-Roundness: These micrometers are designed for measuring the outside diameters of workpieces with uneven grooved or otherwise interrupted surfaces. They are also useful for measuring shafts for lobe-error.

- .0001" Reading-Inch
- Carbide anvils for longer life

ORDER NUMBER	RANGE	B&S NUMBER	PRICE
7125-350	.094-1"	599-175-2-1	\$ 735.00
7125-351	1-2"	599-175-3-1	766.00
7125-659	2-3"	599-175-4-1	1145.00



Mitutoyo V-Anvil Micrometers – Series 114, 314


3 Flutes and 5 Flutes

FEATURES

- Measures the outside diameter of cutting heads (such as taps, reamers, end mills) with an odd number of flutes.
- The 314 series provides digital readout to .00005"/0.001mm and can be linked to the SPC system.

- Provided with a constant-force device.
- Carbide-tipped spindle.
- Supplied with Standard.

ACCURACY • Flatness: .000024"/0.6µm.



Digimatic V-Anvil Micrometers

Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
314-351-30	.05"-.6" 1.27-15.24mm	.00005" 0.001mm	±.0002"	Anvil has no Groove	\$678.00
314-352-30	.4"-1.0" 10.16-25.4mm	.00005" 0.001mm	±.0002"	Anvil has no Groove	702.00

For SPC output order connecting cable 05CZA662 (1m) or 05CZA663 (2m). Replacement Battery: 938882.

V-Anvil Micrometers

Inch



ORDER NO.	RANGE	GRADUATION	FLUTES	ACCURACY	REMARKS	LIST PRICE
114-135	.093-1.0"	.0001"	5	±.0002"	Carbide Tipped Anvil	\$515.00
114-202	.093-1.0"	.0001"	3	±.0002"	Carbide Tipped Anvil	515.00



Mitutoyo Inside Micrometers – Series 145

FEATURES

- Accuracy to .0002" with graduations of .001".
- Easy zero adjustment.
- Clear graduations on satin-chrome finish.
- Caliper type jaws are made of high-grade, tool steel. They are satin-chrome finished.
- Locking clamp for positive locking of spindle.
- With ratchet thimble for constant force.
- Every thousandth is numbered for easy reading.
- Easily adjusted for slide movement of jaw (Exclusive).
- Supplier wrench is supplied with every micrometer.
- Complete with fitted carrying case.

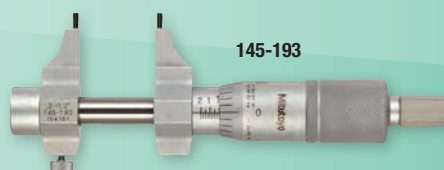

Inch

ORDER NO.	RANGE	GRADUATION	ACCURACY	REMARKS	LIST PRICE
145-193	.2"-1.18"	.001"	±.0002"	—	\$244.00
145-194	1.0"-2.0"	.001"	±.00025"	—	261.00

Mitutoyo Tubular Inside Micrometers – Series 337

Extension Type

FEATURES

- Wide range of ID measurements by combining extension rods with the micrometer head. The rod is accurately finished and incorporated in a pipe for shop-floor use.
- The 337 series provides digital readout to .0001"/0.001mm and can be linked to the SPC System.



Digimatic Inside Micrometers – Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	HEAD TRAVEL	HEAD ACCURACY	DIAM. OF RODS	REMARKS	LIST PRICE
337-303	8-40"	.0001" 0.001mm	1.0"	±.0001"	.50"	Includes Micrometer Head and 6 pcs Rods. w/SPC output	\$1150.00
337-304	8-60"	.0001" 0.001mm	1.0"	±.0001"	.50"	Includes Micrometer Head and 7 pcs Rods. w/SPC output	1290.00

For SPC output order connecting cable 937387 (1m) or 965013 (2m).

Measuring Instruments



Electronic Inside Micrometer

- Water Resistant to IP54 specifications.
- True inch/metric conversion. • Resolution: .00005"/.001mm.
- Measuring jaws & faces fully hardened and microlapped for accuracy.
- Each gage includes appropriate setting ring.
- Direct RS232 output. • Supplied in fitted case.

6

ORDER NUMBER	DESCRIPTION	PRICE
54-860-275	0.2—1"/25mm	\$188.60
54-860-276	1—2"/50mm	204.18




Inside Micrometer

- For small internal measurements
- Satin chrome no-glare finish
- Measuring faces fully hardened and ground
- Ratchet stop, locking clamp
- Complete with fitted case

2

RANGE	GRAD.	ORDER NO.	PRICE
.2-1.2"	.001"	3100-920	\$40.00
1-2"	.001"	3100-922	51.00



XTRA-VALUE Depth Gage

6

ORDER NUMBER	DESCRIPTION	PRICE
54-225-555	0—22"/50mm	\$38.36

- Spring loaded and hold measurement button for ease-of-use
- Resolution: .0005"/.01mm (fractions in 1/64" increments)
- Travel: 0-1"/25mm
- Supplied in shop-hardened case
- Super large display



Electronic Depth Micrometer

6

ORDER NUMBER	DESCRIPTION	PRICE
54-225-456	0—6"/150mm	\$187.84

- Range: 0-6"/150mm
- 4" Base: Hardened tool steel, precision ground & microlapped
- Protected to IP54 Standards • Resolution: .00005"/.001mm
- Direct RS232 output • Automatic switch off
- Large LCD display



TESA

brown & sharpe

Micrometer Depth Gages

7

ORDERING NUMBER	NO. RANGE	BASE RODS	LENGTH	B&S NO.	PRICE
INCH READING (0.001" GRADUATIONS)					
7125-624	0-3"	3	2.5"	599-603-123-3	\$310.00
7125-627	0-3"	3	4"	599-603-143-3	315.00
7125-625	0-6"	6	2.5"	599-603-126-3	366.00
7125-628	0-6"	6	4"	599-603-146-3	376.00
7125-626	0-12"	12	2.5"	599-603-128-3	540.00
7125-629	0-12"	12	4"	599-603-148-3	553.00

FEATURES:

- 1/8 Measuring Rods
- Friction Thimble (Inch only)
- Ring Lock (Inch only)
- Deep 4" Base with small (.084" dia.) depth rod measures small hole depth over full range



Digimatic Depth Gages – Series 571 With SPC Output

FEATURES

- No rack, no pinion, no glass scale.
- Linear Scale is safely embedded in the hardened stainless steel blade.
- Sliding LCD unit offers push button control for in/mm selection, absolute zero setting, and turning the display on/off.
- Battery life is approximately two years with normal use.
- LCD unit displays "E-o5" for movement error and "B" for battery replacement. Note: sliding unit can be moved as fast as 40" per second.
- 6" and 8" models IP67 rated



571-262-10

7

Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
571-261-10	0-6"/ 0-150mm	.0005"/ 0.01mm	±.001"	Absolute Function Type	\$494.00
571-262-10	0-8"/ 0-200mm	.0005"/ 0.01mm	±.001"	Absolute Function Type	548.00
571-213-10	0-12"/ 0-300mm	.0005"/ 0.01mm	±.0015"	Absolute Function Type	492.00
571-214-10	0-18"/ 0-450mm	.0005"/ 0.01mm	±.002"	Absolute Function Type	808.00
571-215-10	0-24"/ 0-600mm	.0005"/ 0.01mm	±.002"	Absolute Function Type	876.00

For SPC output order connecting cable (for 6" & 8" only) 05CZA624 (1m) or 05CZA625 (2m).

Measuring Instruments

Mitutoyo Depth Micrometers – Series 129

Interchangeable Rod Type

FEATURES

- Ratchet stop for consistent and repetitive measurements.
- .157" DIA. interchangeable rods, with lapped measuring end, are calibrated and tested at the factory. The rod length can be adjusted, to compensate wear on the measuring tip, with two supplied wrenches.
- Satin-chromed finished throughout.
- Crisp clear graduations on the thimble.
- Complete with fitted carrying case.

Metric

ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
129-111	0-100mm	0.01mm	with Interchangeable Rods: 4 pcs. Base Length: 63.5mm	\$187.00
129-112	0-150mm	0.01mm	with Interchangeable Rods: 6 pcs. Base Length: 63.5mm	226.00
129-115	0-100mm	0.01mm	with Interchangeable Rods: 4 pcs. Base Length: 101.6mm	207.00
129-116	0-150mm	0.01mm	with Interchangeable Rods: 6 pcs. Base Length: 101.6mm	242.00

Inch

ORDER NO.	RANGE	GRADUATION	REMARKS	LIST PRICE
129-127	0-4"	.001"	with Interchangeable Rods: 4 pcs. Base Length: 2.5"	\$187.00
129-128	0-6"	.001"	with Interchangeable Rods: 6 pcs. Base Length: 2.5"	226.00
129-149	0-12"	.001"	with Interchangeable Rods: 12 pcs. Base Length: 2.5"	398.00
129-131	0-4"	.001"	with Interchangeable Rods: 4 pcs. Base Length: 4.0"	207.00
129-132	0-6"	.001"	with Interchangeable Rods: 6 pcs. Base Length: 4.0"	242.00
129-150	0-12"	.001"	with Interchangeable Rods: 12 pcs. Base Length: 4.0"	416.00

Mitutoyo Digit Depth Micrometers – Series 329,

Interchangeable Rod Type

FEATURES

- ø4mm interchangeable rods, with lapped measuring end, provide a wide measuring range
- The rod length can be adjusted in 1" or 25mm increments
- With ratchet stop for constant force, measuring rod clamp, SPC output
- Supplied in fitted plastic case.

Inch/Metric

ORDER NO.	RANGE	RESOLUTION	REMARKS	LIST PRICE
329-350-30	0-6" / 0-152.4mm	.00005" / 0.001mm	with SPC output with Interchangeable Rods: 6 pcs.	\$590.00
329-351-30	0-12" / 0-304.8mm	.00005" / 0.001mm	with SPC output with Interchangeable Rods: 12 pcs.	726.00

Metric available upon request. For SPC output order Connecting Cable 05CZA662 (1m) or 05CZA663 (2m). Replacement Battery: 938882.

Pittsburg® Depth Micrometer

FEATURES

- Precision ground hardened base
- Satin chrome no-glare finish
- Ratchet stop for consistent and repetitive measurements
- Complete with fitted case

RANGE	GRAD.	BASE	NO. RODS	ORDER NO.	LIST PRICE
0-4"	.001"	2-1/2"	4	3100-900	\$56.00
0-6"	.001"	2-1/2"	6	3100-902	70.00
0-4"	.001"	4"	4	3100-904	56.00
0-6"	.001"	4"	6	3100-906	72.00

Mitutoyo

Digimatic/Dial Depth Gages

For Rapid, Direct Reading Measurements of Hole Depth

DIGIMATIC DEPTH GAGE FEATURES:

- ABSOLUTE Digimatic Depth Gage can keep track of the origin point once set for the entire life of the battery.
- Wide probing range is available with 4 supplied extension rods.
- Bottom surface of the base is hardened, ground and lapped for highest degree of flatness.
- With SPC data output.

DIAL DEPTH GAGE FEATURES:

- The Dial Indicator has a precision-ground, hard-chrome-plated stem with standard AGD 3/8" diameter. Contact point is hardened, ground and chrome-plated steel. Spindle rack, pinions and pivots are hardened stainless steel to insure long wear and continuing accuracy. Bezel is cleanly knurled and smoothly adjustable with a clamping screw for positive settings. Accuracy of the Dial Indicator exceeds Federal Specifications.
- Spindle lifting lever for raising and lowering and spindle is maintained under spring pressure.
- Rods are available in 1", 2" and 4" lengths and may be connected for depths up to 8". (1" on Dial Indicator + 1" rod + 2" rod + 4" rod = 8".) 10, 20, 30 and 100mm rods for Metric model.
- Bottom surface of the base is hardened, ground and lapped for highest degree of flatness.
- Complete with fitted carrying case.
- Dial Indicator is attached to the base by a clamping screw & interchangeable with any other standard AGD dial indicator.

Digimatic - Inch/Metric

ORDER NO.	RANGE	RESOLUTION	SPINDLE STROKE	REMARKS	LIST PRICE
547-217S	0-8" / 0-200mm	.0005" / 0.01mm	0.5"	Accuracy: ±.001" Base W x Thk.: 2.5 x .63"	\$482.00
547-218S	0-8" / 0-200mm	.0005" / 0.01mm	0.5"	Accuracy: ±.001" Base W x Thk.: 4 x .63"	488.00
547-257S	0-8" / 0-200mm	.00005" / 0.001mm	0.5"	Accuracy: ±.0003" Base W x Thk.: 2.5 x .63"	592.00
547-258S	0-8" / 0-200mm	.00005" / 0.001mm	0.5"	Accuracy: ±.0003" Base W x Thk.: 4 x .63"	601.00

Inch

ORDER NO.	RANGE	GRADUATION	SPINDLE STROKE	REMARKS	LIST PRICE
7217S	0-8"	.001"	1.0"	Accuracy: ±.002" Base Length: 2.5"	\$340.00
7218S	0-8"	.001"	1.0"	Accuracy: ±.002" Base Length: 4.0"	367.00

STANDARD ACCESSORIES

ORDER NO.	DESCRIPTION	LIST PRICE	ORDER NO.	DESCRIPTION	LIST PRICE
301655	1" Rod	\$8.05	301659	4" Rod	\$24.65
301657	2" Rod	12.55	21JZA242	Contact Point	10.05

Fowler Digit Reading Depth Micrometer

ORDER NUMBER	DESCRIPTION	PRICE
52-225-226	0-6"	\$142.81

- Range: 0-6"
- Easy-to-read digit counter
- .001" graduation
- 4" base, hardened and ground
- Satin chrome finish
- Locking Clamp
- Furnished with shop hardened case

Measuring Instruments

Mitutoyo Tool Kits 12



Order No. 64PKA076A
(Digimatic Tool Kit)
List Price \$397.00

INCLUDES:	DESCRIPTION
293-340-30	Digimatic micrometer (Ratchet Stop Type) (Range: 0-1", LCD Resolution: .00005")
500-196-30	Digimatic Caliper (Range: 0-6", LCD Resolution: .00005")
64PPP932	Mahogany Case



Order No. 64PKA077A
(Digimatic Tool Kit)
List Price \$397.00

INCLUDES:	DESCRIPTION
293-348-30	Digimatic micrometer (Friction Thimble Type) (Range: 0-1", LCD Resolution: .00005")
500-196-30	Digimatic Caliper (Range: 0-6", LCD Resolution: .0005")
64PPP932	Mahogany Case

Pittsburg® Multi-Mike Micrometer Anvil Attachment Kit

Turns your Micrometer into 7 different Tools!
Micrometer not included.

- Each Anvil Attachment is held on with its own reinforced Neoprene Boot.
- Made in the U.S.A. to exacting standards, this kit fits any 1-12" Micrometer, English or Metric, and all brands too!
- All 7 anvils come packaged in protective hinged case.
- Can be used singly or in pairs.
- Ball Attachments are 0.200" Diameter, manufactured from Chrome Alloy Steel.
- All parts are Hardened: Finest Quality Steel, Finest Quality Surface Finish.
- All Anvils are 1/2" long.



2

ORDER NO.	PRICE EACH
3100-437	\$55.50

Fowler XTRA-VALUE Depth Gage & Euro-Cal IV Kit

- Euro-Cal IV:**
- Range: 6"/150mm
 - Resolution .0005"/.01mm, frac. by 1/64 increments.
 - Water resistant to IP54 standards.
 - Absolute/incremental measurement.

Xtra-Value Depth Gage:

- Spring loaded w/hold measurement button for ease-of-use.
- Super large display • Range: 0-6"/150mm • Resolution: .0005"/.01mm, frac. by 1/64 increments. • Supplied in shop hardened case.



6

ORDER NO.	PRICE
54-004-330	\$120.67

Fowler XTRA-VALUE Depth Gage & Poly-Cal® Kit

- Poly-Cal:**
- Range: 6"/150mm
 - Resolution .0005"/.01mm, frac. by 1/64 increments.
 - Polycarbonate frame • Absolute/incremental measurement.

Xtra-Value Depth Gage:

- Spring loaded w/hold measurement button for ease-of-use.
- Super large display • Range: 0-6"/150mm
- Resolution .0005"/.01mm, frac. by 1/64 increments. • Supplied in shop hardened case.



6

ORDER NO.	PRICE
54-004-255	\$62.51

Pittsburg® Ball Attachment

The most commonly used Micrometer accessory.

- Allows measurement of cylindrical wall thickness and single point contact on round parts
- Fits .235, .250, & .270 diameter spindles.
- Chrome Alloy Ball, 0.200" diameter.
- Comes with attachment boot and 2 balls.
- Made in U.S.A..



2

ORDER NO.	PRICE EACH
3100-438	\$3.25

Pittsburg® Micrometer Stand

- A heavy, finely finished stand, made of cast iron that can be adjusted to any position
- Provides desirable measuring position and angle for Inside & Outside Micrometers, plus many other instruments



2

ORDER NO.	PRICE
3100-150	\$24.30

Mitutoyo Micrometer Stand – Series 156

FEATURES

- These stands are designed to allow bench-top use with hand micrometers or other gages which have frame area sufficient to grab onto.
- Stand only – tool not included.




12

ORDER NO.	DESCRIPTION	LIST PRICE
156-101-10	For .5" thru 4" micrometers	\$110.00

Measuring Instruments

Mitutoyo Dial Calipers – Series 505 ¹³

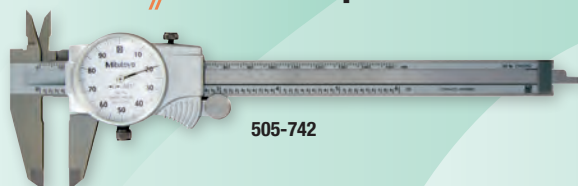

505-742



505-749

FEATURES

- New designed dial movement for ultra smooth sliding and high shock protection.
- Improved finish on sliding surfaces for longevity.
- New face for easier readability.
- Removal of TiN coating on sliding surfaces without sacrificing wear life.
- Lock screw for dial bezel and for holding the sliding jaw position.
- Can measure OD, ID, depth, and steps.
- Models available with carbide-tipped OD and ID jaws.
- Supplied in fitted plastic case.



Inch

DIAL READING - .1" PER ONE REVOLUTION					
ORDER NO.	RANGE	GRADUATION	DESC.	ACCURACY	LIST PRICE
505-742	0-6"	.001"	-	±.001"	\$121.00
505-742-56	0-6"	.001"	Black Dial Face	±.001"	121.00
505-738	0-6"	.001"	Carbide-Tipped Jaws	±.001"	207.00
505-743	0-8"	.001"	-	±.002"	177.00
505-746	0-12"	.001"	-	±.002"	281.00
.2" PER ONE REVOLUTION					
505-740	0-6"	.001"	-	±.001"	111.00
505-741	0-8"	.001"	-	±.002"	165.00
505-749	0-12"	.001"	-	±.002"	261.00

Pittsburg[®] ALLEGHANY Dial Calipers

- Outside, inside, depth and step measurement
- Made of hardened stainless steel, with satin chrome finish
- Measuring faces ground and micro-lapped for accuracy
- Covered rack keeps out dust and dirt, for longer caliper life
- Supplied with fitted case ²

RANGE	RES.	RANGE/REV.	FACE	ORDER NO.	PRICE
0-4"	.001"	.100"	White	3100-550	\$27.50
0-4"	.001"	.100"	Black	3100-551	27.50
0-6"	.001"	.100"	White	3100-555	23.30
0-6"	.001"	.100"	Black	3100-556	23.30
0-8"	.001"	.100"	White	3100-557	47.00
0-8"	.001"	.100"	Black	3100-558	47.00
0-12"	.001"	.100"	White	3100-560	65.00
0-12"	.001"	.100"	Black	3100-561	65.00
0-150mm	.02mm	2.0mm	White	3100-553	37.00

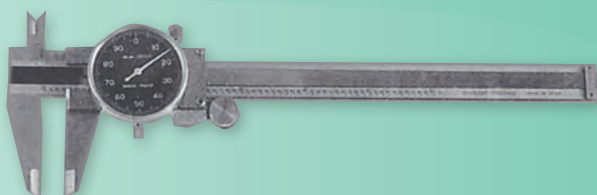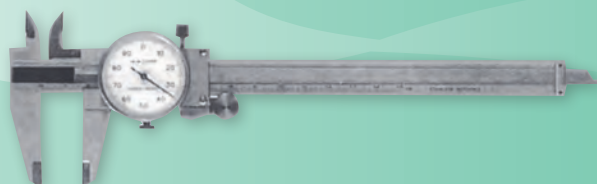


Fowler

Economy Dial Calipers

- 4-way measuring function
- Covered depth rod.
- .100" range per revolution.
- Dial Graduation: .001"
- Accuracy: .001"
- Hardened stainless steel rack.
- Supplied in molded case. ²

ORDER NUMBER	DESCRIPTION	PRICE
52-008-007	0-6" White	\$42.35
52-008-005	0-6" Black	42.35
52-008-008	0-8" White	87.04
52-008-012	0-12" White	105.92

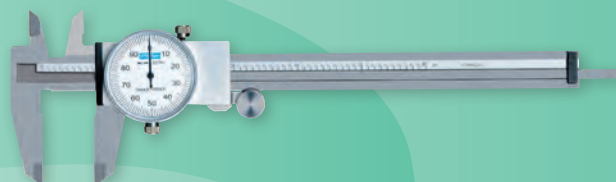

Fowler

Long Range Dial Calipers

- Graduation: .001"
- Satin chrome finish.
- Stainless steel construction.
- Thumblock.
- Depth rod.
- Jaw depth: 3.125". ²

ORDER NUMBER	DESCRIPTION	PRICE
52-008-018	0-18"	\$194.04
52-008-024	0-24"	237.43



Measuring Instruments


Fowler

Premium Brand Shockproof Dial Calipers with Thumbroll

[2]

ORDER NUMBER	DESCRIPTION	PRICE
52-008-706	0—6" White	\$58.12
52-008-707	0—6" Black	58.12
52-008-708	0—8" White	80.95
52-008-712	0—12" White	98.87

- 4-way jaws.
- Stainless steel construction.
- Silky smooth movement throughout.
- .100" range per revolution.
- .001" reading dial face.
- Shockproof design.
- Supplied in molded case.



Fowler

Heavy Duty Dial Caliper w/ Cross-Jaws for direct Internal Measurement

[2]

ORDER NUMBER	DESCRIPTION	PRICE
52-025-108	0—8" White	\$125.33
52-025-112	0—12" White	171.88

- Large 1-Rev dial.
- .001" Dial Graduations.
- .200" Range/revolution.
- 4 way measurement "Outside knife jaws".
- Thumbroll for precise control.
- Stainless steel construction with satin chrome finish.
- Includes wooden case.



TESA

wood brown & sharpe

Dial-Cal® Dial Calipers

- Tough - Anti-backlash, shock proof design
- Durable - Covered stainless steel rack
- Precise - .100"/2mm per revolution
- Easy-To-Read - 1.25" diameter rotating dial w/lock
- Versatile - Measures inside, outside, depth & step
- Reliable - Adjustable zero set and slide lock

Select Traditional White Dial Face or
New High Visibility "Jet-Console" Black Dial Face



599-579-4



599-579-5

[7]

ORDER NO.	RANGE	GRAD.	RANGE PER REV.	DESCRIPTION	JAW LENGTH EXTERNAL	B&S NO.	PRICE
7151-774	6"	.001	.100	w/ Silver Face	1.5"	599-579-4	\$166.00
7151-879	6"	.001	.100	w/ Jet Console, Blk. Face, Orange Hand	1.5"	599-579-5	166.00
7127-594	8"	.001	.100	w/ Silver Face	1.9"	599-579-8-1	296.00
7127-593	8"	.001	.100	w/ Jet Console, Blk. Face, Orange Hand	1.9"	599-579-8-5-1	296.00
7127-592	12"	.001	.100	w/ Silver Face	2.5"	599-579-12-1	353.00
7127-591	12"	.001	.100	w/ Jet Console, Blk. Face, Orange Hand	2.5"	599-579-12-5-1	353.00
7144-297				Wood Case for 6" Dial Caliper		599-578-9999	32.00

T-Bar Base Attachment (Fits All B&S Dial-Cals)

Makes depth measurement of large (up to 3" diameter) holes easy and accurate.

[7]



ORDER NO.	B&S NO.	PRICE
7142-534	05.60013	\$41.00

GENERAL®

Plastic Direct Reading Inch Dial Caliper

[8]



MODEL	ORDER NO.	PRICE
142	6944-145	\$39.96

- State of art reinforced plastic gives precision capabilities at an economical price.
- Measuring capacity 0 to 6".
- Contrasting color coded dial is graduated in .01 and 64ths with inch and mm on bar scale.
- Measures 4 ways: inside, outside, depth and step readings.
- No-glare easy to read dial with adjustable bezel.
- Free wheeling friction roller for repetitive and accurate readings.
- Fractional conversion table on back.
- Packed in reusable plastic hang-up case.

GENERAL®

4 Inch Slide Caliper

[8]



- Stainless steel caliper
- Inside and outside readings in 16ths and 32nds
- Decimal equivalents table on back
- 4" capacity.

MODEL	GRADS	ORDER NO.	PRICE
729	16ths and 32nds	6942-581	\$13.98

Measuring Instruments

Fowler Poly-Cal™ Electronic Caliper



- English/Metric/Fraction • Range 6"/150mm • Polycarbonate Frame. • 4 way measuring.
- Large easy-to-read display. • Resolution .001"/.01mm, fractions by 1/64 increments
- Absolute/Incremental Measurement. • Direct inch/metric conversion.
- Accuracy +/- .008"
- Supplied with vinyl pouch.

ORDER NUMBER	DESCRIPTION	PRICE
54-101-175	0-6"/150mm Poly-Cal	\$19.20

Fowler Euro-Cal™ Electronic Caliper



- Range 6"/150mm • Reads in inch, metric, & fractions
- Direct inch/metric conversion. • Absolute/Incremental Measurement.
- Water resistant to IP54 standards. • Resolution: .0005"/.01mm, (fractions in 1/64 increments).

ORDER NO.	PRICE EACH
54-100-330-1	\$76.78



Digital Electronic Calipers - TWIN-CAL IP67



- Upgradeable instrument thanks to integrated modular connection via TLC (TESA Link Connector)
- Highest degree of protection ever offered: IP67.
- Housing w/ metallic protection plate; "soft touch" feel.
- Two patents for a unique caliper.

ORDER NO.	B&S NO.	DEPTH ROD	THUMB WHEEL	RANGE	PRICE EACH
7147-236	00590302	Round	Y	6"/150mm	\$199.00
7147-237	00590303	Square	Y	6"/150mm	199.00
7147-238	00590304	Square	Y	8"/200mm	276.00
7147-239	00590305	Square	Y	12"/300mm	379.00



Digital Electronic Calipers - TWIN-CAL IP40



- Upgradeable instrument thanks to integrated modular connection via TLC (TESA Link Connector)
- Highest degree of protection against dust.

ORDER NO.	B&S NO.	DEPTH ROD	THUMB WHEEL	RANGE	PRICE EACH
7147-473	00590092	Round	Y	6"/150mm	\$143.00
7147-474	00590093	Square	Y	6"/150mm	143.00
7147-475	00590094	Square	Y	8"/200mm	196.00
7147-476	00590095	Square	Y	12"/300mm	276.00

Pittsburg® Electronic Caliper

- Resolution to .0005"/.01mm for error-free reading.
- Three-key type: On/Off, Inch/mm & Zero.
- Made of stainless steel and hardened.
- 4-way measurement for outside, inside, depth and step.
- Thumb roller for moving the slider in small and smooth increments.
- Battery life: 18 months under normal use. • Power supply: One button battery SR 44, 1.55v.



RANGE	ACCURACY	ORDER NO.	PRICE EACH
6"/150mm	+/- .001"/.02mm	3100-546	\$29.95

Fowler Electronic Calipers

- Resolution: .0005"/.01mm
- Stainless steel frame.
- Large easy-to-read display.
- Absolute/incremental measurement.
- Direct inch/metric conversion.
- 4 way measuring.
- Complete in case.



ORDER NUMBER	DESCRIPTION	PRICE
54-101-150-2	0-6"/150mm	\$35.13
54-101-300-1	0-12"/300mm	90.92

Fowler Electronic Calipers




- Direct inch/metric conversion.
- Resolution: .0005"/.01mm
- Accuracy: 4" & 6" models: .001"/.02mm; 8" & 12" models: .0015"/.03mm
- Large easy-to-read LCD display.
- Includes shop hardened case.

ORDER NO.	DESCRIPTION	PRICE
54-100-004-2	0-4"	\$84.32
54-100-000-2	0-6"	84.20
54-100-008-2	0-8"	119.78
54-100-112-2	0-12"	140.44
54-100-777-2	0-6" IP54 Water Resistant	103.41
54-100-712-2	0-12" IP54 Water Resistant	150.42



Digital Calipers - VALUELINE IP67

- TESA know-how at an affordable price.
- High degree of protection, IP67 for the most demanding users.



ORDER NO.	B&S NO.	DEPTH ROD	THUMB WHEEL	RANGE	PRICE EACH
7176-599	00599391	Round	Y	6"/150mm	\$143.00
7145-601	00599390	Square	Y	6"/150mm	143.00
7145-602	00599392	Square	Y	8"/200mm	196.00
7145-603	00599393	Square	Y	12"/300mm	276.00

Measuring Instruments

Mitutoyo

Digimatic Calipers with Exclusive AOS Sensor Technology – Series 500 – without SPC output

Introducing a new Digimatic Caliper line with exclusive AOS Sensor Technology. This patented Advanced Onsite Sensor (AOS) offers improved measurement dependability by increasing resistance to harsh workshop conditions. The new electromagnetic inductive sensor repels dirt, oil and water that can cause false readings. The Absolute (ABS) sensor eliminates the necessity of setting the reference when the tool is powered. An ergonomic slider design and increased battery life (3.5 years under normal operations) rounds out the new features of this line.

Inch/Metric (Non-SPC Output Models)

ORDER NO.	MEASURING RANGE	ACCURACY (20°C)	REMARKS	LIST PRICE
500-195-30	0-4", 0-100mm	±.001"	AOS w/.075" Round Depth Bar	\$144.00
500-196-30	0-6", 0-150mm	±.001"	AOS Technology	156.00
500-197-30	0-8", 0-200mm	±.001"	AOS Technology	224.00
500-193	0-12", 0-300mm	±.0015"		450.00
CARBIDE JAW MODELS				
500-159-30	0-6", 0-150mm	±.001"	AOS w/ OD Carbide Jaw	242.00
500-160-30	0-6", 0-150mm	±.001"	AOS w/ OD, ID Carbide Jaw	312.00
500-163-30	0-8", 0-200mm	±.001"	AOS w/ OD Carbide Jaw	295.00
500-164-30	0-8", 0-200mm	±.001"	AOS w/ OD, ID Carbide Jaw	389.00
500-165	0-12", 0-300mm	±.0015"	with OD Carbide Jaw	602.00
500-166	0-12", 0-300mm	±.0015"	with OD, ID Carbide Jaw	745.00

Replacement Battery: 938882 (1 pc.)

FEATURES

- Large and clear LCD readout.
- The ZERO/ABS key allows the display to be Zero-Set at any slider position along the scale for incremental comparison measurements. This switch will also allow return to the absolute (ABS) coordinate and display of the true position from the origin point (usually jaws-closed point).
- Data Hold Unit (959143) is optional.
- Carbide-tipped jaw type calipers are also available.
- With thumb roller.
- Supplied in fitted plastic case. Except 1000mm / 40" supplied in wooden case.

SPECIFICATIONS

Resolution: 0.01mm or .0005"/0.01mm
Repeatability: 0.01mm / .0005"
Display: LCD
Length standard: ABSOLUTE electrostatic capacitance type linear encoder
Max. response speed: Unlimited
Battery: SR44 (1 pc.), 938882
Battery life: Approx. 3.5 years under normal use

FUNCTION

Origin-set, Zero-setting, Data output, inch/mm conversion (inch/mm models ONLY)
Alarm: Low voltage, Counting value composition error



500-196-30

Mitutoyo Digimatic Calipers with Exclusive AOS Sensor Technology – Series 500 – with SPC output

Inch/Metric (SPC Output Models)

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
500-170-30	0-4", 0-100mm	.0005", 0.01mm	±.001"	AOS w/.075" Round Depth Bar	\$172.00
500-171-30	0-6", 0-150mm	.0005", 0.01mm	±.001"	AOS Technology	183.00
500-174-30	0-6" 0-150mm	.0005" 0.01mm	±.001"	AOS w/ OD Carbide Jaw, Absolute Function Type	350.00
500-175-30	0-6" 0-150mm	.0005" 0.01mm	±.001"	AOS w/ OD, ID Carbide Jaw, Absolute Function Type	374.00
500-172-30	0-8", 0-200mm	.0005", 0.01mm	±.001"	AOS Technology	241.00
500-176-30	0-8" 0-200mm	.0005" 0.01mm	±.001"	AOS w/ OD Carbide Jaw, Absolute Function Type	389.00
500-177-30	0-8" 0-200mm	.0005" 0.01mm	±.001"	AOS w/ OD, ID Carbide Jaw, Absolute Function Type	411.00
500-167	0-12" 0-300mm	.0005" 0.01mm	±.0015"	with OD Carbide Jaw	650.00
500-168	0-12", 0-300mm	.0005", 0.01mm	±.0015"	with OD, ID Carbide Jaw	761.00
500-173	0-12", 0-300mm	.0005", 0.01mm	±.0015"		525.00
500-505-10	0-18" 0-450mm	.0005" 0.01mm	±.002"	without Depth Bar, Absolute Function Type	819.00
500-506-10	0-24" 0-600mm	.0005" 0.01mm	±.002"	without Depth Bar, Absolute Function Type	900.00
500-507-10	0-40" 0-1,000mm	.0005" 0.01mm	±.003"	without Depth Bar, Absolute Function Type	1740.00

Mitutoyo's new Digimatic Caliper with exclusive **AOS Sensor Technology** eliminates the necessity of setting the reference when the tool is powered. It also improves measurement dependability by increasing resistance to harsh workshop conditions.

FEATURES

- Large and clear LCD readout.
- The ZERO/ABS key allows the display to be Zero-Set at any slider position along the scale for incremental comparison measurements. This switch will also allow return to the absolute (ABS) coordinate and display of the true position from the origin point (usually jaws-closed point).
- Data Hold Unit (959143) is optional.
- Carbide-tipped jaw type calipers are also available.
- With thumb roller.
- Supplied in fitted plastic case. Except 1000mm / 40" supplied in wooden case.

SPECIFICATIONS

Resolution: 0.01mm or .0005"/0.01mm
Repeatability: 0.01mm / .0005"
Display: LCD
Length standard: ABSOLUTE electrostatic capacitance type linear encoder
Max. response speed: Unlimited
Battery: SR44 (1 pc.), 938882
Battery life: Approx. 3.5 years under normal use

FUNCTION

Origin-set, Zero-setting, Data output, inch/mm conversion (inch/mm models ONLY)
Alarm: Low voltage, Counting value composition error

For SPC output order Connecting Cable **959149** (1m) or **959150** (2m).
Replacement Battery: 938882 (1pc), Data Hold Unit: 959143




500-171-30

Mitutoyo Coolant Proof Digimatic Caliper with Absolute Encoder

Introducing Mitutoyo's coolant-proof caliper, the world's first digital caliper sealed against fluids and contaminants! The toughest digital caliper in the world— the first that's IP-67 rated: coolant-proof, dust-proof, chip-proof. Use it anywhere in the shop. It also includes Mitutoyo's patented absolute encoder technology, the "Set-n-Forget" origin set-up feature. Now you can take digital measurements in places you never could before! Models available with SPC output.

Technical Data:	
Measuring Ranges	0-6"/0-150mm, 0-8"/0-200mm, 0-12"/0-300mm
Resolution	.0005" / 0.01mm
Accuracy	±.001" / ±0.02mm, (12" is ±.0015")
Repeatability	.0005" / 0.01mm
Dust/Water protection level	IP-67 (IEC 60529)
Display	LCD, Character height: .3" (7.5mm)
Functions	Origin setting, inch/mm conversion, automatic power On/Off
Battery	SR44 (1 piece) up to 8" (2 piece) for 12"
Battery life	(0-6") Approx. 3-yr. (0-12") Approx. 1-yr. under normal use
Measuring system	Electromagnetic induction type absolute linear encoder
Response speed	Unlimited

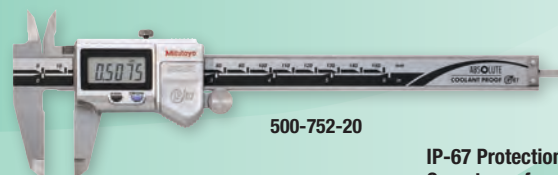

500-752-20

Protection against water

Level 5: Protection against water spray.
Definition: Protect the equipment against water spray* from any direction.

* Condition: Using a nozzle with a 6.3mm ID and splash water with 30Kpa water pressure (approx. 12.5 l/min) on the equipment from a distance of three meters for three minutes or over (1 minute per 1m2 superficial area).

IP-67 Protection Class Operator-safe and protection against foreign matter

Level 6: Protection against dust.
Definition: Protect the equipment against dust not to penetrate.

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
500-752-20	0-6", 0-150mm	.0005", 0.01mm	±.001"	IP-67, no SPC	\$209.00
500-753-20	0-8"/0-200mm	.0005", 0.01mm	±.001"	IP-67, no SPC	280.00
500-754-10	0-12"/0-300mm	.0005", 0.01mm	±.0015"	IP-66, no SPC	484.00
500-762-20	0-6", 0-150mm	.0005", 0.01mm	±.001"	IP-67, w/SPC	248.00
500-763-20	0-10"/0-200mm	.0005", 0.01mm	±.001"	IP-67, w/SPC	312.00
500-764-10	0-12", 0-300mm	.0005", 0.01mm	±.0015"	IP-66, w/SPC	537.00

Measuring Instruments

Mitutoyo Digimatic IP67

Super Solar Powered Calipers Series 500 (Solar CD) With or Without SPC Output



The Solar Absolute (ABS) MyCAL is Mitutoyo's latest advancement in caliper technology. This unique caliper incorporates an absolute scale which always reads its true position from the origin point. Power is supplied by built-in solar cells which operate even in low light conditions down to 60 Lux.

The ABS feature eliminates the need for zero setting each time the caliper is turned on. The Solar Absolute MyCAL will always turn on showing its true position (not 0.0000 as standard calipers do). Memory of the origin point will not be lost when power is cut off even if the caliper is left in complete darkness for extended periods. Additionally, the ABS scale provides unlimited response speed which means no more over-speed errors. For comparison measurements an incremental measurement function is also provided.


Inch/Metric

ORDER NO.	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
500-786	0-6" / 0-150mm	.0005" / 0.01mm	±.001"	with SPC output	\$267.00
500-787	0-8" / 0-200mm	.0005" / 0.01mm	±.001"	with SPC output	330.00
500-784	0-6" / 0-150mm	.0005" / 0.01mm	±.001"	without SPC output	239.00
500-785	0-8" / 0-200mm	.0005" / 0.01mm	±.001"	without SPC output	306.00

For SPC output order Connecting Cable **05CZA624** (1m) or **05CZA625** (2m).
Note: Solar Cells should be maintained over 60 lux.



Ultra-Cal V Electronic Calipers

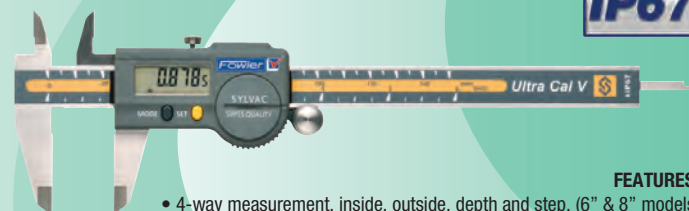


FEATURES:

- 4-way measurement, inside, outside, depth and step. (6" & 8" models)
- Resolution: .0005"/.01mm • Repeatability: .0005"/.01mm • Hold function
- Direct inch/metric conversion • Temperature range 5 to 40°C working; -20 to 60°C in storage
- Hardened stainless steel construction • Direct RS-232 output • Thumbroll (6" model only)
- Features Absolute/Relative Measuring Modes • Includes case • Bluetooth models available

ORDER NO.	DESCRIPTION	ACCURACY	RESOLUTION	PRICE EACH
54-100-067-1	6"/150mm	0.0008"/20µm	0.0005"/.01mm	\$198.59
54-100-068-1	8"/200mm	0.0012"/30µm	0.0005"/.01mm	472.77
54-100-069-1	12"/300mm	0.0012"/30µm	0.0005"/.01mm	567.32



Electronic Calipers



- RS232C Direct output
- Full size .0005" digital display
- Hold feature


ORDER NUMBER	DESCRIPTION	PRICE
54-100-312	0-12"	\$174.54
54-100-024-1	0-24"	257.99
54-100-042-1	0-40"	727.06

Mitutoyo Digimatic Carbon Fiber Calipers - Series 552

These large Digimatic Calipers have a beam constructed of a strong carbon fiber which makes them both durable and easy to handle.

FEATURES


- Lightweight Digimatic caliper that employs CFRP (Carbon Fiber Reinforced Plastics) in the beam & jaws.
- Display: 6-digit LCD with a minus sign (-). • Power supply: One SR44 (938882).
- Functions include: Preset of desired starting point inch/mm conversion, Zero-setting, Data hold, Error alarm, Low battery alarm, Data output.
- Battery life: Approx. two years under normal use (Approx. one year in continuous operation).
- Provided with a data output port for connection with the SPC system.



ORDER NO.	RANGE	ACCURACY	LCD RESOLUTION	LIST PRICE
552-312-10	0(.5")-18"	+/- .002"	.0005"/0.01mm	\$947.00
552-313-10	0(.5")-24"	+/- .002"	.0005"/0.01mm	1060.00
552-314-10	0(1")-40"	+/- .002"	.0005"/0.01mm	1890.00
552-315-10	0(1")-60"	+/- .004"	.0005"/0.01mm	2260.00
552-316-10	0(1")-80"	+/- .005"	.0005"/0.01mm	3540.00

For SPC output order Connecting Cable **05CZA624** (1m) or **05CZA625** (2m).
*(): Minimum dimension in ID measurement.

Mitutoyo Digimatic Carbon Fiber Calipers - Series 552 - Interchangeable Jaws




FEATURES

- The range of applications can be expanded by using interchangeable jaws (optional).
- Quick and easy exchanging of jaws due to the unique clamping mechanism. (A pair of clamping wheels is a standard accessory.) • SPC data output.
- Preset function for setting a desired starting point, which allows direct readout of offset measurements.

ORDER NO.	RANGE	ACCURACY	MASS (g)	LIST PRICE
552-191-10	0-18" / 0-450mm	±.002"	650	\$910.00
552-192-10	0-24" / 0-600mm	±.002"	725	940.00
552-193-10	0-40" / 0-1000mm	±.002"	1480	1510.00
552-194-10	0-60" / 0-1500mm	±.004"	1880	2450.00
552-195-10	0-80" / 0-2000mm	±.005"	2280	3430.00

For SPC output order Connecting Cable **05CZA624** (1m), **05CZA625** (2m), **02AZD790A**: (160mm).
Battery: SR44 (1 pc.) **938882**. Standard accessory: Jaw clamps (2 pcs.) **05GZA033**

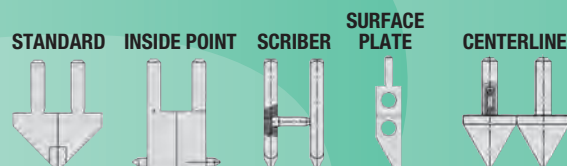

OPTIONAL JAWS (2 pcs.)

ORDER NUMBER	DESCRIPTION	PRICE
07CZA056	Standard Type	\$308.00
07CZA058	Inside Point Type (Metric)	317.00
07CZA059	Inside Point Type (Inch)	342.00
07CZA055	Scriber Type (Metric)	335.00
07CZA061	Scriber Type (Inch)	342.00
07CZA044	Surface Plate Type	267.00
07CZA057	Centerline Type (Metric)	342.00
07CZA060	Centerline Type (Inch)	317.00

Measuring Instruments

Mitutoyo Vernier Caliper (with Thumb Clamp)



Metric/Inch Dual Scale

ORDER NO.	RANGE		VERNIER GRADUATION		ACCURACY	LIST PRICE
	LOWER SCALE	UPPER SCALE	LOWER SCALE	UPPER SCALE		
531-128	0-150mm	0-6"	0.02mm	.001"	±0.03mm	\$108.00
531-108	0-200mm	0-8"	0.05mm	1/128"	±0.05mm	134.00
531-129	0-200mm	0-8"	0.02mm	.001"	±0.03mm	134.00

Mitutoyo Vernier Calipers



- Available with a fine-adjustment carriage to fine-feed the slider.
- Long jaws for measuring hard-to-reach portions.
- With a fine-adjustment carriage to fine-feed the slider.

Inch

ORDER NO.	RANGE		VERNIER GRADUATION		ACCURACY	LIST PRICE
	LOWER SCALE	UPPER SCALE	LOWER SCALE	UPPER SCALE		
530-105	0-6"	0-6"	.001"	1/128"	±.0015"	\$105.00
530-116	0-8"	0-8"	.001"	1/128"	±.0015"	124.00

Metric/Inch

530-104	0-150mm	0-6"	0.05mm	1/128"	±0.05mm	\$75.90
530-312	0-150mm	0-6"	0.02mm	.001"	±0.03mm	105.00
530-118	0-200mm	0-8"	0.02mm	.001"	±0.03mm	124.00
530-101	0-150mm	—	0.05mm	—	±0.05mm	105.00

Mitutoyo Depth Base Attachment

FEATURES

- For 4", 6", 8", and 12" Mitutoyo Vernier and Dial Calipers.
- Choice of 3" or 4" base length for 6" and 8" models.
- Finely ground base surface and secure locking clamp.

ORDER NO.	LENGTH	DESCRIPTION	LIST PRICE
050083-10	3"	For 4", 6" & 8" models	\$49.75
050084-10	4"	For 4", 6" & 8" models	59.65
050085-10	5"	For 12" models only	69.90



Pittsburg® Depth Base Attachment

- Fits all brands of 4", 6", 8" Calipers.
- Precision Ground Base.
- Screw Locking Clamp.
- Each unit hand inspected.

ORDER NO.	DESCRIPTION	PRICE EACH
3100-395	3" Base - Fits 6" Calipers	\$33.25
3100-396	4" Base - Fits 8" Calipers	34.25
3100-397	5" Base - Fits 12" Calipers	41.75

Centerline Gages

Quickly measures hole to hole centers


FEATURES

- Fits 4", 6", and 8" Calipers 0.375" Diameter x 2.20" Long.
- Read centerline distances directly without conversions.
- 60 Degree Conical Points.
- Made in U.S.A.
- Hardened Steel with Black Oxide finish.

ORDER NO.	PRICE EACH
3100-465	\$19.95



Fowler Master Vernier Calipers

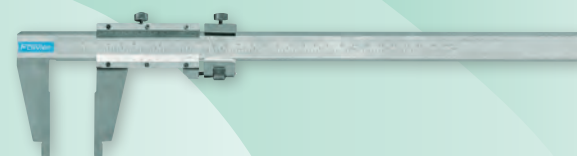

- Machine engraved from master.
- Slide type fine adjust thumbwheel.
- Nib design measures both inside & outside dimensions.
- Satin chrome finish.
- Graduation: .001"/.02mm
- Price includes fitted case.

ORDER NUMBER	DESCRIPTION	PRICE
52-085-012	0-12"/300mm	\$125.00
52-085-024	0-24"/600mm	223.27
52-085-040	0-40"/1200mm	614.00
52-085-060	0-60"/1500mm	2432.86

Pittsburg® Heavy Duty Vernier Calipers



- Longer jaws for greater accessibility and simpler measurement of large work pieces
- Easy to read Vernier scales with clear, crisp black engraved graduations
- Fine quality stainless steel construction
- Satin chrome finish
- Supplied with fitted case

RANGE	GRAD.	ORDER NO.	PRICE
0-12"/300mm	.001"/.02mm	3100-312	\$ 69.00
0-18"/450mm	.001"/.02mm	3100-318	94.00
0-24"/600mm	.001"/.02mm	3100-320	149.00
0-40"/1000mm	.001"/.02mm	3100-322	280.00
0-60"/1500mm	.001"/.02mm	3100-324	535.00

Pittsburg® Precision Vernier Caliper

- For outside, inside and depth measurement
- Made of fully hardened stainless steel
- Satin chrome finish
- Supplied with fitted case

RANGE	GRAD.	ORDER NO.	PRICE
0-6"/150mm	.001"/.02mm	3100-305	\$15.00
0-8"/200mm	.001"/.02mm	3100-306	23.00
0-12"/300mm	.001"/.02mm	3100-307	42.00



Universal Caliper Accessory Kit

- Outfits any 4-6-8" Caliper.
- Made in U.S.A.
- Measures slots, grooves, webs, shoulders, holes, pockets.



ORDER NO.	PRICE EACH
3100-402	\$35.75

Measuring Instruments

Pittsburg® Vernier Height Gage

- Stainless steel beam and measuring slide
- Supplied with scribes, holder and fitted case
- Adjusting slide scale for fine adjustment
- Dial test indicator (ordered separately) can replace scriber
- Satin chrome finish with micro-fine engraved graduations

RANGE	GRAD.	ORDER NO.	PRICE
12"/300mm	.001"/.02mm	3100-212	\$ 92.00
18"/450mm	.001"/.02mm	3100-218	139.00
24"/600mm	.001"/.02mm	3100-224	172.50



Double-Beam Digital Counter Dial Height Gage

- Carbide tipped scriber
- Chrome plated double beams by depressing zero-reset button
- Large feed wheel for coarse and fine vertical adjustments
- Bottom of base is hardened, grounded and lapped for maximum flatness
- Dual directional counter can be zero set at any height within range
- Easy to read Dial Indicator and Digital Counter: .1" Reading

RANGE	GRAD.	ORDER NO.	PRICE
12"	.001"	3100-952	\$185.00
18"	.001"	3100-954	230.00
24"	.001"	3100-956	300.00



Mitutoyo

Digital Counter Type Height Gages - Series 192

FEATURES

- Easy error-free reading with both up and down digital counters as well as a dial.
- The counters and dial can be zero-set at any scriber position.
- Provided with a feed wheel for easy coarse feeding.
- Standard carbide-tipped scriber.



Inch

ORDER NO.	RANGE	DIAL GRADUATION	DIGITAL COUNTER GRADUATION	MASS (lbs.)	LIST PRICE	
192-150	0-12"	.001"	.1" (Dual Reading)	±.0015"	9.26	\$ 1010.00
192-151	0-18"	.001"	.1" (Dual Reading)	±.002"	20.28	1400.00
192-152	0-24"	.001"	.1" (Dual Reading)	±.002"	21.60	1820.00
192-153	0-40"	.001"	.1" (Dual Reading)	±.003"	37.5	3990.00

Standard Accessories: Scriber (900258) & Scriber Clamp (901385)

Mitutoyo

HDS Digimatic Height Gages - Series 570 with output for SPC

FEATURES

- Can easily measure the height of small parts.
- Absolute encoder for direct measurement from power on.
- Unlimited response speed • Economical energy-saving design
- Display: LCD, 6 digits and a minus sign (-).
- Functions include: Zero-setting (ABS and INC modes), Presetting (ABS and INC modes), Data hold, Counting direction changeover, Inch/mm conversion, Data output, Error alarm, Low battery alarm.
- Provided with a data output port for connection with the SPC system.



Inch/Metric

ORDER NO.	570-312	570-313	570-314
Measuring Range	0-12" 0-300mm	0-18" 0-450mm	0-24" 0-600mm
Resolution	.0005"/0.01mm		
Accuracy	±.0015"	±.0015"	±.0015"
Repeatability		.0005" (0.01mm)	
Power Supply		Silver oxide cell (SR-44) 1 pc 541980	
Data Output		Digimatic code output (SPC output)	
Mass	10.12 lbs.	12.98 lbs.	14.08 lbs.
Standard Accessories:			
Scriber	(900258)	(900258)	(900258)
Scriber Clamp	(901385)	(901385)	(901385)
LIST PRICE	\$627.00	\$880.00	\$1130.00

For SPC output order connecting cable 905338 (1m) Or 905409 (2m).

Mitutoyo

Digimatic Height Gages - Series 192 Self-contained Electronic Inch/Metric Display

FEATURES

- Easy-to-use standard type. • Carbide-tipped scriber is provided.
- Double-column structure ensures high measuring accuracy.
- Functions include: Coarse/Fine Feed switching, switchable resolution, Two preset reference height, zero setting, ABS/INC switching, two presets, probe tip dia. compensation, +/- switching, Power ON/OFF, Data Hold, no output, inch/mm conversion, alarm: low voltage, counting value composition error

192-630-10



ORDER NO.	192-630-10	192-631-10	192-632-10	192-633-10
Measuring Range	0-12" 0-300mm	0-18" 0-450mm	0-24" 0-600mm	0-40"
0-1000mm				
Resolution	.0005" (0.01mm), (.0002" (0.005mm) Switchable)			
Accuracy (20° C)	±.001"	±.002"	±.003"	
Display	LCD, 7 digit, character height 11mm			
Response Speed	500mm/s			
Battery	SR44 (938882)			
Mass (kg)	4.7	7.5	8.3	15.7
Standard Accessories:	Carbide Tipped Scriber (905258) Scriber Clamp (901385)			
LIST PRICE	\$1540.00	\$2110.00	\$2690.00	\$5080.00

Pittsburg® Double-Beam Electronic Height Gage

- On/Off switch, Plus/Minus preset button, Metric/Inch conversion button, Zero Preset and Function button
- Switchable rapid/fine adjustment with large feed wheel
- Stainless steel frame
- Carbide tipped scriber



RANGE	GRAD.	ORDER NO.	PRICE
12"/300mm	.001"/.02mm	3100-960	\$295.00
18"/450mm	.001"/.02mm	3100-962	379.00
24"/600mm	.001"/.02mm	3100-964	499.00

Measuring Instruments

Mitutoyo Digimatic Height Gages - Series 192 Heavy Duty Type

FEATURES

- Highly versatile multi-function type. • Carbide tipped long scriber is provided.
- Rigid construction ensures repeatable measurement.
- Switchable resolution. • Coarse/Fine Feed switching.
- Bi-directional touch signal probe is an optional accessory.
- It can quickly and accurately measure steps, inside width, and outside width.
- With SPC data output. • Two preset reference height.
- Functions: Zero-setting, ABS/INC switching, 2 presets, probe tip diameter compensation, +/- switching, power ON/OFF, data hold, data output, inch/mm conversion
- Alarm: low voltage, counting value composition error



192-670-10
Probe Optional

Inch/Metric

7

ORDER NO.	192-670-10	192-671-10	192-672-10	192-673-10
Measuring Range	0-12" 0-300mm	0-18" 0-450mm	0-24" 0-600mm	0-40" 0-1000mm
Resolution	.0005" (0.01mm), (.0002" (0.005mm) Switchable)			
Accuracy	±.001" ±.0015" ±.0025"			
Display	LCD, 7 digit, character height 11mm			
Response Speed	500mm/s			
Battery	SR44 (938882)			
Mass (kg)	5.7	7.5	8.3	15.7
Standard Accessories:	Carbide Tipped Scriber (905201) Scriber Clamp (901385)			
Data output	SPC output			
Optional Accessories	Two-directional Touch Probe (192-008) Measuring force 0.4N			
LIST PRICE	\$1770.00	\$2280.00	\$2920.00	\$5480.00

For SPC output order Connecting Cable No. 905338 (1m) or 905409 (2m).

Pittsburg® Electronic Digital Height Gage

- Switchable Inch/Metric high contrast LCD with fine adjustment device
- Non-contact measuring system keeps out chips, oil, dust and dirt
- Ground and hardened stainless steel frame • Carbide tipped scriber
- Base precision ground and micro-lapped for maximum flatness

RANGE	GRAD.	ORDER NO.	PRICE
12"/300mm	.0005"/.01mm	3100-970	\$200.00
18"/450mm	.0005"/.01mm	3100-972	300.00
24"/600mm	.0005"/.01mm	3100-974	400.00



Fowler Z-HEIGHT

Electronic Digital Height Gage

- Direct Inch/Metric Conversion
- Accuracy: 0-12" model: ±.0015"
0-24" model: ±.002"
- Resolution .0005" (.01mm)
- Large, high contrast LCD display
- ABS/INC Measurement
- Hold feature • Positive lock, carbide scriber
- Direct RS232 output • Floating zero
- Includes molded case

ORDER NO.	DESCRIPTION	PRICE
54-175-012	0-12"/300mm	\$344.40
54-175-024	0-24"/600mm	492.51



Fowler Z-HEIGHT

- Jr.

- Direct Inch/Metric Conversion
- Accuracy: .001"
- Range: 6"/150mm
- Resolution: .0005" (.01mm)
- Large, high contrast LCD display • Hold feature
- ABS/INC Measurement • Floating zero
- Positive lock, carbide scriber
- Includes molded case

ORDER NO.	PRICE
54-175-006	\$142.60



Mitutoyo QM Height - High Precision Digital Height Gage

- Newly developed high accuracy and high resolution ABSOLUTE linear encoder for position detection.
- Built-in pneumatic flotation system enables smooth movement along surface plate.
- Possible to measure inside/outside diameter via unique process (detect the circle apex and process by tracing measurement).
- Various optional probes available. • With SPC and USB output.
- Easy reference icon keys. • Large size LCD with back light.
- GO/±NG judgment is performed by setting the upper and lower tolerances. If a judgment result is out of tolerance, the display backlighting changes from green to red, so tolerance judgment can be made at a glance.
- Slider elevation knob (for travel) / wheel (for measurement).
- Resolution: .00005" / .0001" 0.001 / 0.0005mm
- Accuracy: ±(2.4+2.1L/600)µm L = Measuring length (mm)



ORDER NO.	RANGE	PERPENDICULARITY	MASS (LBS.)	LIST PRICE
64PKA094A	0-14"/0-350mm	7µm	55.16	\$3990.00
64PKA095A	0-24"/0-600mm	12µm	63.93	4490.00
PNEUMATIC FLOTATION				
64PKA129A	0-14"/0-350mm	7µm	57.32	4490.00
64PKA130A	0-24"/0-600mm	12µm	66.14	4990.00

Mitutoyo Linear Height - LH-600E High Performance 2D Measurement System

- Excellent accuracy of (1.1+0.6L/600)µm with 0.1µm/0.5µm resolution/repeatability. • Data entry from a Digimatic tool.
- Guaranteed perpendicularity (frontal) of 5µm and straightness of 4µm.
- Pneumatic full/semi-floating system allows adjustment of air-cushion height.
- Basic statistical functions are provided and, additionally, RS-232C / USB data output provides the option of evaluating measurement data externally with SPC software on a PC.
- One-key operation for running a semi-automatic measurement.

Power Grip model also available.

ORDER NO.	518-351A-21	PRICE
Range:	0-38"/0-972mm	\$8480.00
Resolution:	.000001/.00001/.0001/.001" 0.0001/0.001/0.01/0.1mm	
Accuracy:	.000043 + (.000024 x L*/24)" (1.1+0.6L**/600)µm	



TESA | brown & sharpe

Digital Height Gage - TESA-HITE Magna 400/700

Equipped with the patented TESA MAGNA measuring system, these 1D manual height gages are particularly suitable for harsh conditions. Very robust with a high protection level (IP65), specifically designed for tough production environments where high dust penetration and splashing of liquids (water, oil, etc.) are common.

ORDER NO.	B&S NO.	MEASURING RANGE	APPLICATION RANGE	LIST PRICE
7128-260	00730047	16"/400mm	22"/570mm	\$3645.00
7128-261	00730059	28"/700mm	34"/870mm	4650.00



TESA | brown & sharpe

Digital Height Gage - TESA-HITE 400/700

Manual 1D height gages have a refined panel and easily-accessible software, typically used in workshops. Focuses on the main functions necessary for quick measurements and immediate access to the results. It is delivered with a rechargeable battery that has the longest battery life on the market (<60H). This is particularly important in places with limited access to power supply or when the measurement requires large displacements of the height gage itself.

ORDER NO.	B&S NO.	MEASURING RANGE	APPLICATION RANGE	LIST PRICE
7124-675	00730043	16"/400mm	22"/570mm	\$4790.00
7124-676	00730044	28"/700mm	34"/870mm	5490.00




Measuring Instruments

Fowler XTENDER

Dial Bore Gage Sets

- Carbide anvils
- Graduation: .0005" or .01mm
- Easily adjustable
- Self-centering
- Insulated grip
- Chrome plated handle.
- Includes extension holder and fitted case.

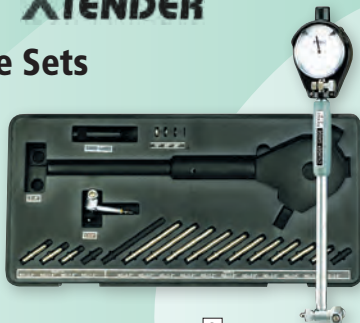

2

ORDER NUMBER	DESCRIPTION	PRICE
52-646-400	1.4-6" Xtender Set	\$146.68
52-646-220	35-60mm Metric Xtender Set	152.33

Fowler XTENDER-E

1.4" to 6" Electronic Bore Gage Set

Bore Gage Features:

- Range: 1.4"-6"/35mm-150mm
- Easily adjustable.
- Self-centering.
- Includes extension holder.
- Shop hardened case.
- Carbide anvils.



Includes FREE Instructional CD!

All the same benefits included in the X-Tender Dial Bore Gage are now available with an electronic indicator providing inch/metric reading capability, preset size of master for absolute reading and minimum hold feature to lock on the bore size as the gage is rocked through the bore.

ORDER NUMBER	DESCRIPTION	PRICE
54-646-401	Xtender-E Bore Gage Set	\$276.44

Indicator Features:

- Dual reading inch/metric electronic indicator.
- Bar graph and numeric digital display.
- Resolution: .00005"/.001mm
- Preset with recall.
- Min/Max/Tir
- ABS/INC measurement.

Fowler

Bore Gage Setting Master Kit

Includes:
Bore Gage Setting Master
& 36 Gage Block Set
All in a high quality
aluminum case!

Each Set Includes:

- Base anvil 2.750" x .80"
- Adjustable anvil: 2.375" x .375"
- Internal capacity: 6" • Depth capacity: 1"
- Centralizer capacity width: 2.625"
- Quick release holder for fast adjustment.

Economy Gage Block Set:

- 36 piece • Tolerances to .00005"
- Certified calibration to N.I.S.T.

High quality aluminum case!
Bore Gage sold separately.



6

ORDER NUMBER	DESCRIPTION	PRICE
53-646-000-1	Bore Gage Setting Master Set	\$241.07

Mitutoyo

Dial Bore Gages - Series 511, 526

MITUTOYO offers a complete selection of Dial Bore Gages, all of them with interchangeable anvils and necessary accessories to perform close tolerance I.D. measurements. The smallest range measurement is .24", the largest one is 16". Some of the larger 511 Series Bore Gages are equipped with a unique guiding device which facilitates accurate measurement of the bore because it is self-centering. The supplied AGD Series 2 dial indicator is fully protected by a rugged cover. The smallest graduation on the dial face is either .0001"/0.001mm or .0005"/0.005mm.

Series 526

FEATURES

- Measures diameters of small holes.
- Radius displacement of split-ball contact is converted to axial displacement of measuring pin, which is shown on the dial indicator.
- Digimatic Indicator can be installed in place of the dial indicator.
- .0005" or .0001" reading types.
- Accuracy: .00016" (Range: .3-.4"); .00024" (Range: .4-.7")

Inch

RANGE	PROBE DEPTH	NUMBER OF ANVILS	NUMBER OF SPACERS	PROBE TYPE	ORDER NO. (WITH INDICATOR)			
					W/2922SB	LIST PRICE	W/2923SB-10	LIST PRICE
.24-.4"	2"	9	—	A	511-213	\$606.00	511-212	\$629.00
.7-1.4"	4"	8	3	D	511-741	356.00	511-751	411.00
1.4-2.5"	6"	6	4	D	511-742	356.00	511-752	401.00
2.0-6.0"	6"	11+1*	4	D	511-743	394.00	511-753	438.00
4.0-6.5"	6"	13	4	D	511-744	522.00	511-754	579.00
6.5-10.0"	10"	6	6	D	511-745	591.00	511-755	652.00
.4-.7"	2.4"	8	—	C	526-120	419.00	526-123	479.00

526-123

511-751

Optional Bore Gage Stand
Order No.: 215-120-10
Price Each: \$1380.00

12

Pittsburg[®] ALLEGHANY Dial Bore Gages

- Sets supplied complete with anvils and necessary accessories to perform close tolerance I.D. measurements
- Top quality AGD Series 2 Dial Indicator included
- Self-centering
- Fitted case



2

RANGE	GRAD.	BORE DEPTH	NO. ANVILS	ORDER NO.	PRICE
0.24-0.4"	.0005"	1.56"	4	3100-980	\$84.50
0.4-0.7"	.0005"	2.4"	9	3100-981	84.50
0.7-1.5"	.0005"	4"	8	3100-982	64.00
1.4-2.4"	.0005"	6"	6	3100-983	64.00
2.0-6.0"	.0005"	6"	11	3100-985	84.50
6.4-10.0"	.0005"	16"	6	3100-987	94.50

Mitutoyo Center Master

FEATURES

- Allows quick measurement of center-to-center distance between holes.
- Measurable hole diameters: .04"-1.49".



1

ORDER NO.	DESCRIPTION	REMARKS	LIST PRICE
900581	For Inch Model Height Gages	.25" x .50" Shank	\$169.00

Measuring Instruments



Dial Bore Gage Sets

- Easy-to-read.
- Economical
- Graduation: .0005"
- Insulated grip.
- Chrome plated handle.
- Includes extension holder and fitted case.
- Complete in shop hardened case.

MODEL NUMBER	DESCRIPTION	PRICE
52-646-100	.7"-1.5" Dial Bore Gage Set	\$112.81
52-646-300	2-6" Dial Bore Gage Set	109.09



Borematic – Series 568

FEATURES

- LCD Readout .00005"/0.001mm.
- Carbide tipped contact points ensure long life.
- Efficient measurement using two measurement modes – ABS (absolute) and INC (incremental) modes.
- Can be linked to the M-SPC (Mitutoyo Statistical Process Control) system.
- Rotatable display unit for easy reading at any angle.
- Functions include: Origin setting, Origin restoration, Zero-setting, Presetting, Data hold, Error alarm, Low-battery alarm, Data output.
- Power supply: SR44 (button-type silver oxide cell), 2 pcs.



MEASURING FORCE (per Anvil)		ACCURACY	
Range	.275-.5" 4-10N	Range	.275-.8" .0002"
Range	.5-4.4" 10-30N	Range	.8-4.4" .00024"

* Quantizing error ± 1 count.

Borematic Interchangeable-Head Sets

Each set includes one display unit with contact heads of the sizes specified.



568-936

Inch/Metric

SET ORDER NO.	SET RANGE	INDIVIDUAL RANGE	LIST PRICE
568-928	.275"-.5" 6.985-12.7mm	.275"-.35"/6.985-8.89mm .35"-.425"/8.89-10.795mm .425"-.5"/10.795-12.7mm	\$2230.00
568-929	.5"-1.0" 12.7-25.4mm	.5"-.65"/12.7-16.51mm .65"-.8"/16.51-20.32mm .8"-1.0"/20.32-25.4mm	2530.00
568-930	1.0"-2.0" 25.4-50.8mm	1.0"-1.2"/25.4-30.48mm 1.2"-1.6"/30.48-40.64mm 1.6"-2.0"/40.64-50.8mm	3080.00
568-936	2.0"-4.0" 50.8-101.6mm	2.0"-2.5"/50.8-63.5mm 2.5"-3.0"/63.5-76.2mm 3.0"-3.5"/76.2-88.9mm 3.5"-4.0"/88.9-101.6mm	4440.00

*Extra anvils supplied to allow added range.

For SPC output order connecting cable 937387 (40"/1m) or 965013 (80"/2m).



Digimatic Holtests Interchangeable-Head Sets

Inch/Metric



568-978

Thimble Graduation	.0002"
LCD Readout	
Up to 4"	.0005"/0.001mm
Over 4"	.0001"/0.001mm

Range .8-2"/20.32-50.8mm
Set No. 468-978 \$4120.00

Includes:
04AZB113 Display & Thimble Unit
04AZA730 Interchangeable Head
.8-1"/20.32-25.4mm
04AZA731 Interchangeable Head
1-1.2"/25.4-30.48mm
04AZA739 Interchangeable Head
1.2-1.6"/30.48-40.64mm
04AZA740 Interchangeable Head
1.6-2.0"/40.64-50.8mm
177-184 Setting Ring 1.000" DIA.
177-291 Setting Ring 1.600" DIA.
952622 Extension Rod 5.9" (150mm)
04GAA858 Spanners (one pair)
202863 Hex Wrench
938882 SR44 Battery

Range .275-.5"/6.985-12.7mm
Set No. 468-976 \$2030.00

Includes:
04AZB111 Display & Thimble Unit
04AZB139 Interchangeable Head
.275-.35"/6.985-8.89mm
04AZB140 Interchangeable Head
.35-.425"/8.89-10.795mm
04AZB141 Interchangeable Head
.425-.5"/10.795-12.7mm
177-179 Setting Ring .350" DIA.
177-283 Setting Ring .425" DIA.
952322 Extension Rod 3.94" (100mm)
04GAA857 Spanners (one pair)
202863 Hex Wrench
938882 SR44 Battery

Range 2-4"/50.8-101.6mm
Set No. 468-979 \$4720.00

Includes:
04AZB114 Display & Thimble Unit
04AZA754 Interchangeable Head
2-2.5"/50.8-63.5mm
04AZA755 Interchangeable Head
2.5-3.0"/63.5-76.2mm
04AZA756 Interchangeable Head
3.0-3.5"/76.2-88.9mm
04AZA757 Interchangeable Head
3.5-4.0"/88.9-101.6mm
177-315 Setting Ring 2.5" DIA.
177-319 Setting Ring 3.5" DIA.
952623 Extension Rod 5.9" (150mm)
04GAA858 Spanners (one pair)
202863 Hex Wrench
938882 SR44 Battery

Range .5-.8"/12.7-20.32mm
Set No. 468-977 \$1650.00

Includes:
04AZB112 Display & Thimble Unit
04AZA721 Interchangeable Head
.5-.65"/12.7-16.51mm
04AZA722 Interchangeable Head
.65-.8"/16.51-20.32mm
177-182 Setting Ring .650" DIA.
952621 Extension Rod 5.9" (150mm)
04GAA857 Spanners (one pair)
202863 Hex Wrench
938882 SR44 Battery

Range 4-8"/101.6-203.2mm
Set No. 468-980 \$5540.00

Includes:
04AZB115 Display & Thimble Unit
04AZA783 Interchangeable Head
4-5"/101.6-127mm
04AZA784 Interchangeable Head
5-6"/127-152.4mm
04AZA785 Interchangeable Head
6-7"/152.4-177.8mm
04AZA786 Interchangeable Head
7-8"/177.8-203.2mm
177-299 Setting Ring 5" DIA.
177-303 Setting Ring 7" DIA.
952623 Extension Rod 5.9" (150mm)
04GAA858 Spanners (one pair)
202863 Hex Wrench
938882 SR44 Battery

For SPC output order connecting cable 05CZA662 (40"/1m) or 05CZA663 (80"/2m).



Digimatic Holtests - Series 468

The Digimatic Holtest is a three-point internal micrometer with digital display(LCD). Functions include: Zero-setting, Preset, Data Hold, Inch/mm conversion, Error alarm, Data output.



FEATURES

- Efficient measurement using two measurement modes – ABS (absolute) and INC (incremental) modes.
- The 468 series provides digital readout to .0001"/0.001mm and can be linked to the M-SPC (Mitutoyo Statistical Process Control) system.
- Battery: SR44 x 1 (938882).
- Measurement can be taken nearly up to the bottom of the bore.
- The display automatically turns off idle for 20 minutes.
- Can measure deep holes with extension rod attachment (optional).
- Carbide tipped contact points.
- All TiN coated

Optional Mounting Plate For Stand
Order No. 04AZB157
Price Each: \$46.30

Optional Stand (See page 532)



ACCURACY

RANGE	
.275-.8"/6-20mm	.00008"/0.002mm
.8-4"/20-100mm	.00012"/0.003mm
4-12"/100-300mm	.0002"/0.005mm

MEASURING FORCE (per Anvil)

RANGE	
.275-.5"/6-20mm	4-20N
.5-4"/12-100mm	15-45N
4-12"/100-300mm	30-75N

*Quantizing error ± 1 count.

Measuring Instruments

Pittsburg[®] ALLEGHANY Dial Indicators

- AGD 2
- Accurate, rugged and production tested
- Hard chrome satin finish
- Interchangeable hardened chrome point (4-48 thread)
- Revolution counter
- Lug back
- Easy to read crisp graduations



RANGE	GRAD.	READING	ORDER NO.	PRICE
1/4"	.001"	0-50-100	3100-563	\$13.50
1/2"	.001"	0-50-100	3100-564	14.50
1"	.001"	0-50-100	3100-565	16.50
1"	.001"	0-50-100 BLK	3100-566	16.50
2"	.001"	0-50-100	3100-568	34.50

Pittsburg[®] ALLEGHANY Dial Centering Indicator

- Designed for centering a workpiece or fixture
- Operates at any angle
- Use vertical or horizontal
- Use internal or external
- While spindle rotates, the centering indicator always faces the operator
- Supplied complete with restraining rod and feelers, in fitted case



SPECIFICATIONS:

Length: 6-7/8"
 Shank: 3/8" diam. x 7/8" long
 Weight: 9-1/2 oz. Net
 Feeler Ball: 1/8" Diameter
 Meas. Range: 250 axis offset
 Capacity: Internal-5/32 to 4-1/4" dia.
 External- 0 to 4-1/4" dia.
 Speed: Not to exceed 800 RPM
 Locating accuracy: To within 0.0002" of true center
 Graduation: 0.0005

ORDER NO.	PRICE
3101-010	\$95.00

Mitutoyo Dial Indicators

FEATURES

- 1. Revolution Counter
- 2. Shockproof
- 3. Jeweled Bearings
- 4. Waterproof
- 5. Flat Back
- 6. Lug-On-Center Back
- 7. Reverse Reading



Lug-On-Center Back Models
(All Except 2804SB-10)

ORDER NO.	TOTAL RANGE	DIAL FACE	GRAD.	RANGE/ REVOLUTION	DIAL DIA.	AGD *FEATURES	LIST PRICE
1803S-10	.025"	0-5-0	.0001"	.01"	1-5/8"	1 3,6	\$167.00
3803S-10	.025	0-5-0	.0001	.01	3	3 3,6	213.00
2804S-10	.050	0-10	.0001	.01	2-1/4	2 3,6	165.00
2804SB-10	.050	0-10	.0001	.01	2-1/4	2 3,5	165.00
1506S	.125	0-50	.0005	.05	1-5/8	1 6	99.80
1410S	.250	0-100	.001	.100	1-5/8	1 6	108.00
1411S	.250	0-50-0	.001	.100	1-5/8	1 6	108.00
2414S	.500	0-100	.001	.100	2-1/4	2 6	110.00
2776S	1.000	0-50	.0005	.05	2-1/4	2 6	142.00
2416S	1.000	0-100	.001	.100	2-1/4	2 6	119.00
2416S-10	1.000	0-100	.001	.100	2-1/4	2 3,6	141.00
2417S	1.000	0-50-0	.001	.100	2-1/4	2 6	119.00
2904S	1.000	100-0	.001	.100	2-1/4	2 7	124.00
3416S	1.000	0-100	.001	.100	3	3 6	155.00
2424S-19	2.000	0-100	.001	.100	2-1/4	2 1,3,6	220.00
4887S-19	3.000	0-100	.001	.100	3-9/16	4 6	340.00


Fowler AGD Indicators

- 1" Travel.
- Continuous reading: 0-100
- AGD group 2 dial diameter.
- Revolution counter.
- Tolerance markers.
- Lug back mount

MODEL NUMBER	READING	FACE COLOR	PRICE
52-520-110	.001	White	\$34.05
52-520-109	.001"	Black	34.67
52-520-129	.0005"	White	105.88



52-520-110



52-520-109



52-520-129

Pittsburg[®] ALLEGHANY Dial Indicator Depth Base

- Precision ground and hardened.
- Made in U.S.A.



DESCRIPTION	ORDER NO.	PRICE EACH
2-1/2" Long Base	3100-392	\$21.25
4" Long Base	3100-394	26.75

Fowler Electronic Indicator

INDI-X^{blue}

- Direct Inch/Metric Conversion
- 1"/25mm travel
- Auto Off feature
- 2 1/4" dial face
- Lugback and 3/8" stem diameter
- Resolution .0005"/.01mm
- Tolerance indicators
- Absolute/incremental reading
- Floating zero
- Carbide tipped point



A Low Cost, High Quality, Multi-Function Indicator

MODEL NUMBER	DESCRIPTION	PRICE
54-520-250	Indi-X Blue Electronic Indicator	\$65.19

Mitutoyo IDU Digimatic Indicator with Absolute Encoder Series 575

FUNCTIONS

- ON/OFF
- Origin Setting
- Data output
- Inch/mm conversion (for Inch/Metric models)
- +/- Direct Changeover
- Error alarm
- Low battery alarm



575-123

Optional Accessories

ORDER NO.	DESCRIPTION	PRICE
905338	Digimatic Cable (1m)	\$40.05
905409	Digimatic Cable (2m)	47.75

FEATURES

- Compact and economical design.
- Provided with a data output port for connection with the SPC system.
- Power supply: One SR-44 battery (938882).
- Operating temperature: 0°C-40°C.
- Membrane sealed face helps keep out contaminants.

ORDER NO.	DESCRIPTION	PRICE
540774	Spindle Lifting cable	\$32.95

ORDER NO.	575-123 (INCH/METRIC MODEL)	575-121 (METRIC MODEL)
Measuring Range	0-1"/0-25.4mm	0-25.4mm
LCD Resolution	.0005"/0.01mm	0.01mm
Accuracy	.0008"	0.02mm
Measuring Force (Downward)	1.8N or less	
Stem Diameter	.375 +0/- .0012"	8.0mm +0/- .009mm
Data output	Digimatic output	
Standard Accessories	Silver-oxide cell SR-44 (1 pc.) (938882)	
Protection Level	IP-42	
Battery Life	20,000 hrs.	
PRICE EACH	\$195.00	\$195.00

Measuring Instruments



IP54 Shockproof Indicator

Protection Includes:

- Rubber bellows on stem
- O-ring seal on safety cap
- O-ring protection for bezel and rotating dial
- Sealed back plate

Specifications:

- Robust, shockproof design
- Travel: 1" • Reading: .001"
- Continuous reading: 0-100 • Tolerance markers
- AGD Group 2, 2-1/4" dia. • Lugback and carbide point

2

ORDER NUMBER	DESCRIPTION	PRICE
52-520-450	IP54 Shockproof Indicator	\$35.43



Electronic Indicator

Now available in inch, metric, and fraction!

- Direct Inch/Metric/Fraction Conversion
- Auto Off feature
- 2 1/4" dial face
- Lugback and 3/8" stem diameter
- Resolution .0005"/.01mm/64ths
- Tolerance indicators
- Absolute/incremental reading
- Floating zero
- Carbide tipped point

A Low Cost,
High Quality,
Multi-Function
Indicator

6

ORDER NUMBER	DESCRIPTION	PRICE
54-520-260	Indi-X Blue Electronic Indicator	\$63.60



Water Resistant Indicator Set

Magnetic Base (52-585-010-0):

- Fine adjustment
- Base dimensions: 2" x 2-11/32" x 1-13/16"
- Mounts test indicators with 1/4" post
- 85 lb. pull • On-Off lever release magnet
- V-base for placing on round surfaces
- Best Value IP54 Shockproof indicator available!

X-Proof Indicator (52-520-450-0):

- Travel: 1" • Reading: .001"
- Continuous reading: 0-100
- Tolerance markers • AGD Group 2, 2-1/4" dia.
- Lugback and carbide point
- Robust, shockproof design
- Rubber bellows on stem • Sealed back plate
- O-ring seal on safety cap, protection for bezel and rotating dial

2

ORDER NUMBER	DESCRIPTION	PRICE
52-585-155	Water Resistant Indicator Set	\$80.99



Fine Adjust Mag Base Set

With **INDI-X blue** Electronic Indicator

Indi-X Blue Indicator features:

- Direct Inch/Metric Conversion
- 1"/25mm travel • Auto Off feature
- 2 1/4" dial face
- Lugback and 3/8" stem diameter
- Resolution .0005"/.01mm
- Tolerance indicators
- Absolute/incremental reading
- Floating zero • Carbide tipped point

Magnetic Base features:

- 85 lb. pull • Fine adjustment.
- V-bottom base.

Magnetic Indicator Back features:

- Use for positioning the indicator on most metal surfaces.
- Protective coating

All in a shop-hardened case.

6

ORDER NUMBER	DESCRIPTION	PRICE
54-585-075	Fine Adjust Mag Base Set	\$110.82



Portable Durometers

Fowler's Portable Durometers are just right for testing the hardness of flexible materials such as rubber and plastics. These gages conform to shore scales.

- Manufactured in accordance with DIN, ASTM, ISO and JIS specifications.
- Includes reference test block, operating instructions and fitted case.
- Optional bench stand available.



Applications:

35° blunt taper Durometers are suitable for testing soft and natural rubber products, neoprene, polyesters, soft PVC, leather, thiokol, nitril rubbers, wax, felt and more.

Sharp 30° point Durometers are ideal for testing hard rubber, hard synthetic materials, e.g. acrylics, glass, polystyrol, thermoplastics, printing rolls, vinyl sheets, cellulose acetates, densified wood, etc.

6

ORDER NUMBER	PENETRATOR	SHORE SCALE	GRADUATIONS	PRICE
53-762-101	Blunt taper 35°	A	1 Shore	\$242.67
53-762-102	Sharp 30°	D	1 Shore	242.67

Measuring Instruments

Mitutoyo Absolute Digimatic Indicator ID-C Series 543 - Standard Type

FEATURES:

- As compact as standard Series 2 dial indicators.
- Large, easy-to-read LCD.
- GO/±NG judgment is performed by setting upper and lower tolerance limits. The judgement result (GO/±NG) can be displayed in full size characters.
- The positive/negative count resulting from the spindle's up/down movement can be toggled.
- Internal calculations using the simple formula of $[F(x) = Ax]$ are available.
- Employing the ABSOLUTE linear encoder, the Signal ID-C always displays the spindle "Absolute Position" from the origin at power-on.
- The ID-C indicator face can be rotated 330° to an appropriate angle for easy reading.
- With SPC data output.

Battery: SR44 (1 pc.), 938882

Function:

Origin-set/Preset, Zeroset, GO/±NG judgment, Max/Min/Runout value holding, Counting direction switching, Power ON/OFF, Data output, inch/mm conversion (on inch/metric models only)
Alarm: Low voltage, Counting value composition error, Over-flow error, Tolerance limit setting error



Inch/Metric

7

Stem dia. 3/8", 4-48 Thread

RESOLUTION	RANGE	ORDER NO.	PRICE EACH	MODEL	ACCURACY	MEASURING FORCE
.0005"/0.001mm*	.5" / 12.7mm	543-392 543-392B	\$424.00	ID-C112EXB	.0001"	1.5N or less
.0005"/0.001mm*	.5" / 12.7mm	543-396 543-396B	663.00	ID-C112CEX	.0001"	0.4N - 0.7N (Low force)
.0005"/0.001mm*	1" / 25.4mm	- 543-472B	568.00	ID-C125EXB	.0001"	1.8N or less
.0005"/0.001mm*	2" / 50.8mm	- 543-492B	713.00	ID-C150EXB	0.002"	2.3N or less
.0005"/0.01mm	.5" / 12.7mm	543-402 543-402B	310.00	ID-C1012EX	.001"	0.9N or less
.0005"/0.01mm	.5" / 12.7mm	543-406 543-406B	497.00	ID-C1012CEX	.001"	0.2N - 0.5N (Low force)
.0005"/0.01mm	1" / 25.4mm	- 543-476B	454.00	ID-C1025EXB	.001"	1.8N or less
.0005"/0.01mm	2" / 50.8mm	- 543-496B	597.00	ID-C112CEXB	.0016"	2.3N or less

* Switchable Resolution Type

Optional Accessories:

905338: SPC cable (40" / 1m), 905409: SPC cable (80" / 2m)

21EZA198: Spindle lifting lever (ISO/JIS type)*, 21EZA199: Spindle lifting lever (ANSI/AGD type)*

21EZA105: Spindle lifting knob (12.7mm/.5"ISO/JIS type)**

21EZA150: Spindle lifting knob (12.7mm/.5"ANSI/AGD type)**

21EZA197: Spindle lifting knob (25.4mm/1", 50.8mm/2" models)

21EZA200: Spindle lifting knob (50.8mm/2"), 540774: Spindle lifting cable (stroke: (1" / 25.4mm)

02ACA571: Auxiliary spindle spring for 25mm/1" models***

02ACA773: Auxiliary spindle spring for 50mm/2" models***

*Can be used on 12mm/.5" models only. **Not available for low measuring force models.

***Required when orienting gage upside down.



Mark VI Electronic Indicators

- FEATURES:**
- Robust construction
 - Water and coolant resistant
 - Protection class IP-67
 - Repeatability: 2µm
 - Output: Proximity/Power - USB/RS232/digimatic/Wireless
 - Battery life: 10,000 hours of operation
 - Menus customizable with free software
 - Wide range of functions (MIN/MAX/DELTA, TOL, Factor, Preset, Auto Off, etc)
 - Aluminum housing
 - Bezel rotates 270°
 - Includes lug back
 - Large display with LED tolerance indicators



ORDER NO.	DESCRIPTION	MAX ERROR	RESOLUTION	PRICE EACH
54-530-125	0-.500"/12.5mm	0.0004"/.01mm	0.0005"/.01mm	\$430.75
54-530-135	0-.500"/12.5mm	0.00012"/.003mm	0.00005"/.001mm	535.81
54-530-145	0-1"/25mm	0.0004"/.01mm	0.0005"/.01mm	491.64
54-530-155	0-1"/25mm	0.00016"/.004mm	0.00005"/.01mm	588.34
54-530-175	0-2"/50mm	0.00019"/.005mm	0.00005"/.001mm	1113.64
BLUETOOTH				
54-530-335	0-.500"/12.5mm	0.00012"/0.003mm	0.00005"/.001mm	682.89
54-530-355	0-1"/25mm	0.00016"/.004mm	0.00005"/.001mm	730.22

Mitutoyo ID-S Digimatic Indicators with Absolute Encoder

Series 543 - Simple and Economical Design with Absolute Encoder

These IDS Type Digimatic Indicators incorporate Mitutoyo's Absolute Encoder Technology so all settings are maintained for the life of the battery. The IDS provides clear digital readings in a convenient and compact package which conforms generally to Series 2 dial indicator dimensions.

Inch/Metric 7



ORDER NO.	543-783 (LUG-BACK)	543-793 (LUG-BACK)
	543-783B (FLAT-BACK)	543-793B (FLAT-BACK)
Measuring Range	0-.5"/0-12.7mm	0-.5"/0-12.7mm
LCD Resolution	.0005"/0.01mm	.0001"/0.001mm
Accuracy (20°C)	.0008"/0.02mm	.00012"
Measuring Force	2.0N (200gf) or less	2.0N (200gf) or less
Battery	SR-44 (1 pc.) No. 938882	SR-44 (1 pc.) No. 938882
Battery Life	Approx: 20,000 hours	Approx: 20,000 hours
Protection Level	Conforming to IP-42	Conforming to IP-42
Functions	ORIGIN, ON/OFF, in/mm, +/-	ORIGIN, ON/OFF, in/mm, +/-
Data output*	SPC Digimatic output	SPC Digimatic output
Stem Diameter	.375" +0/-0.0012"	.375" +0/-0.0012"
Contact Point	.16"dia. carbide-tipped ball (4-48UNF)	.16"dia. carbide-tipped ball (4-48UNF)
Mass	0.27 lbs.	0.27 lbs.
PRICE EACH	543-783 \$177.00 543-783B \$177.00	543-793 \$273.00 543-793B \$273.00

* For SPC output order Connecting Cable 905338 (1m) or 905409 (2m)

OPTIONAL ACCESSORIES

ORDER NO.	DESCRIPTION	PRICE	ORDER NO.	DESCRIPTION	PRICE
21EZA199	Spindle Lifting Lever (ANSI/AGD Type)	\$5.40	101306	Lug-on-Center Back (ANSI/AGD Type)	11.10
540774	Spindle Lifting Cable	32.95	101039	Flat Back	5.80
21EZA150	Lifting Knob	22.90			

Pittsburg[®] Electronic Digital Indicators

Type A

- Error-free digital readings in basic & economical package
- Easy to read LCD
- Battery Powered
- Zero set, Inch/Metric, Auto On/Off
- Reverse readings indicator (-sign)

Type B

- Trim design gets into tight spaces. Only 1-1/2" wide and less than 1" thick
- Easy to read LCD
- Flat back
- Battery powered
- Zero set, Inch/Metric
- Includes lifting lever



RANGE	GRAD.	TYPE	ORDER NO.	PRICE
0-5"/13mm	.0005"/.01mm	A	3100-992	\$125.00
1.0"/25mm	.0005"/.01mm	B	3101-000	150.00

Measuring Instruments

Mitutoyo

Absolute Digimatic Indicator ID-H Series 543 – High Accuracy and Functional Type

FEATURES

- This new-generation digital indicator offers the excellent accuracy and functionality expected from this class of indicator. Take advantage of its high accuracy backed up by 0.5 μ m / .00002" resolution, remote control functionality via a handheld controller (or an RS-232C interface) and easy runout measurements with the well-established analog bar display.
- The maximum, minimum, or runout value can be displayed during measurement.
- GO/ $\pm$ NG judgement is performed by setting the upper and lower tolerances. If a judgment result is out of tolerance, the display backlighting changes from green to red, so tolerance judgment can be made at a glance.
- With SPC data output • With RS-232C input/output

Standard Accessories

06AEG180JA: AC Adapter 120v 137693: Lifting Lever

Optional Accessories:

936937: SPC cable (40" / 1m), 965014: SPC cable (80" / 2m), 21EAA131: RS-232C cable (80" / 2m)

21EZA099: Remote controller, 540774: Spindle lifting cable (stroke: .4" / 10mm)

21EZA101: Spindle lifting knob, 264-504-5A: Digimatic Min-processor DP-1VR

543-004A: Digimatic presetter, 21EZA152A: FREE PARAMETER SETTING SOFTWARE

*Required when orienting the indicator upside down.

Technical Data

Accuracy: Refer to the list of specifications

Resolution: 0.0005mm/0.001mm or .00002"/.00005"/.0001"/0.0005mm/0.001mm

Display: LCD Length standard: Linear encoder

Max. response speed: 1000mm/s

Measuring force: 2.0N/2.5N* or less (*60mm range models)

Power supply: 6V DC (via AC adaptor)

Function

Origin-set/Preset, Zero-set, GO/ $\pm$ NG judgement, Max/Min value hold, Runout measurement, Resolution switching, Counting direction switching, Power ON/OFF, Data output, inch/mm conversion (on inch/metric models only) Alarm: Low voltage, Counting value composition error, Over-flow error, Tolerance limit setting error



Inch/Metric

MODEL NO.	RESOLUTION	RANGE	MODEL	ACCURACY	PRICE
543-562A	.00002", .00005"	1.2" / 30.4mm	ID-H530E	0.0015mm	\$883.00
543-564A (INCH)	.0001", 0.0005mm, 0.001mm	2.4" / 60.9mm	ID-H560E	0.0025mm	1050.00
543-561A	0.0005mm, 0.001mm	30.4mm, 60.9mm	ID-H530	0.0015mm	883.00
543-563A (METRIC)			ID-H560	0.0025mm	1050.00

7

Fowler XTEST

Test Indicators Twice the Test for Less!

2

MODEL NUMBER	GRADUATION	DIAL DIAM.	PRICE
52-562-001	.0005"	1.5"	\$109.64
52-562-002	.0005"	1"	109.64
52-562-003	.001"	1"	109.64
Kit			
52-562-100	.0005"	1.5"	174.04
52-562-110	.0005"	1"	174.04

X-Test Indicator:

- Range: .060" Graduation: .0005"
- Dial reading: 0—15—0
- Dial diameter: 1-1/2"
- Jewelled movement
- Revolution counter
- Auto-reverse
- 210° Swivel arc
- Tungsten carbide .080" point

Kit includes:

- Dial test indicator
- Axial support
- Height gage bar w/ clamp
- Adaptor sleeve
- Contact point case
- Contact point wrench
- Shop-hardened case.



Mitutoyo "Quick-Set" Test Indicators Series 513 w/ Jeweled Bearings

FEATURES

- ① "O" ring incorporated in new bezel design seals instrument from dust and oil mist.
- ② Enlarged pitch of teeth on crown gear improves ability of indicator to withstand shock.
- ③ Rubber bumpers limit travel of sector gear and prevent damage due to excessive travel.
- ④ Special alloy of sector gear provides greater resistance to wear, and longer distance between pivot points for better protection against shock.
- ⑤ Carbide point, .078" DIA., is standard.
- ⑥ Dovetails, integral with housing, give broad flexibility for mounting of instruments.



513-412

12

Inch/Metric

ORDER NO. BASIC	LIST PRICE	GRADUATION	RANGE	DIAL READING	ACCURACY	TYPE	REMARKS	ORDER NO. COMPLETE	LIST PRICE
513-406-10E	\$152.00	.0005"	.03"	0-15-0	$\pm$.0005"	Horizontal	Combitec Anti-Magnetic	513-406-10T	\$169.00
		0.7mm	0.01mm	0-35-0					

Inch

12

ORDER NO. BASIC	LIST PRICE	GRADUATION	RANGE	DIAL READING	ACCURACY	TYPE	REMARKS	ORDER NO. COMPLETE	LIST PRICE
513-403-10E	\$169.00	.0001"	.008"	0-4-0	$\pm$.0001"	Horizontal	Anti-Magnetic	513-403-10T	\$198.00
513-402-10E	130.00	.0005"	.03"	0-15-0	$\pm$.0005"	Horizontal	Anti-Magnetic	513-402-10T	154.00
513-452-10E	169.00	.0005"	.03"	0-15-0	$\pm$.0005"	Vertical	—	513-452-10T	186.00
513-2826-10A	180.00	.0005"	.03"	0-15-0	$\pm$.0005"	Parallel	—	513-482-10T	186.00
513-412-10E	186.00	.0005"	.03"	0-15-0	$\pm$.0005"	Horizontal	Long Point Anti-Magnetic	513-412-10T	215.00

12

The most direct gear train design ever applied to Test Indicators means – higher level of sensitivity, reliability, repeatability and accuracy throughout tool life.



TESA
TECHNOLOGY

brown & sharpe.

White Face Indicator Sets

Large diameter dials make reading fast and easy. Comes with three carbide contact points: .040", .080" and .120" diameter; two extensions with .0001" to .0005" or (0.01 or 0.002mm on -14 models) dovetails; one point wrench; certificate of accuracy and traceability; all in a durable molded case.

7

ORDERING NUMBER	RANGE	MARKING	SMALLEST DIVISION	DIAL DIA.	POINT LENGTH	TIP DIA.	B&S NUMBER	PRICE EACH
INCH READING								
7125-925	.030"	0-15-0	.0005"	1"	1/2"	Three	599-7030-6	\$225.00
7125-926	.030"	0-15-0	.0005"	1-1/2"	1/2"	Tips	599-7031-6	255.00
7125-929	.008"	0-4-0	.0001"	1"	1/2"	With	599-7032-6	256.00
7125-923	.008"	0-4-0	.0001"	1-1/2"	1/2"	Each	599-7023-6	283.00
METRIC READING								
7125-927	0.8mm	0-0.4-0	0.01mm	.28mm	12.5mm	Three	599-7030-14	\$235.00
7125-928	0.8mm	0-0.4-0	0.01mm	.38mm	12.5mm	Tips	599-7031-14	261.00
7125-930	0.2mm	0-100-0	0.002mm	.28mm	12.5mm	Each	599-7032-14	287.00



Measuring Instruments



TESA
TECHNOLOGY



brown & sharpe.

Bestest Indicators

Bestest® Indicators meet or exceed federal or DIN specifications. All Bestest Indicators are furnished with a certificate of accuracy and traceability. And Bestest Indicators provide all of the following high quality features to ensure fast, accurate and continuously reliable measurement.

- Constant Clockwise Rotation
- Universal Mounting • Automatic Reversal
- Monoblock (Precision Watch) Body Design
- Swivelling Point • Carbide Tip Point
- Anti-Magnetic & Corrosion Resistant
- Price Includes Fitted Case

White Face Indicators

Each BesTest® Indicator set comes complete accessories. End mounted Indicator set comes with one carbide tip contact point: .080" dia., with one 3/8" dia. x 2 1/2" long universal One rectangular bar; One swivel clamp; One mounting attachment in place of rectangular contact point wrench; One fitted wooden case that accommodates additional accessories. End mounted Indicator set comes with one 3/8" dia. x 2 1/2" long universal mounting attachment in place of rectangular bar and swivel clamp.



7

Fowler **XTEST**

Vertical X-Test Indicators

Twice the range of most indicators!

X-Test Indicator:

- Range: .060" • Dial reading: 0—15—0
- Jeweled movement • Revolution counter
- Easy-to-read tilted dial • Automatic Reversal
- 210° Swivel arc • Tungsten carbide .080" point



2

ORDERING NUMBER	RANGE	MARKING	SMALLEST DIVISION	DIAL DIA.	POINT LENGTH	TIP DIA.	B&S NUMBER	PRICE EACH
INCH READING								
7145-977	.030"	0-15-0	.001"	1"	1/2"	.080"	599-7029-3	\$232.00
7145-978	.030"	0-15-0	.0005"	1"	1/2"	.080"	599-7030-3	238.00
7145-979	.030"	0-15-0	.0005"	1-1/2"	1/2"	.080"	599-7031-3	246.00
7145-980	.008"	0-4-0	.0001"	1"	1/2"	.080"	599-7032-3	269.00
7146-400	.008"	0-4-0	.0001"	1-1/2"	1/2"	.080"	599-7023-3	310.00
7145-981	.008"	0-4-0	.00005"	1-1/2"	1/2"	.080"	599-7033-3	312.00
7145-982	.020"	0-10-0	.0005"	1"	1-7/16"	.080"	599-7034-3	317.00
7145-983	.020"	0-10-0	.0005"	1-1/2"	1-7/16"	.080"	599-7035-3	327.00
END MOUNTED								
7150-437	.030"	0-15-0	.0005"	1"	1/2"	.080"	599-7037-3	317.00
7146-406	.008"	0-4-0	.0001"	1-1/2"	1/2"	.080"	599-7024-3	355.00
7150-436	.008"	0-4-0	.00005"	1-1/2"	1/2"	.080"	599-7038-3	355.00
METRIC READING								
7145-984	0.8mm	0-0.4-0	0.01mm	.28mm	12.5mm	2mm	599-7030-13	238.00
7145-985	0.8mm	0-0.4-0	0.01mm	.38mm	12.5mm	2mm	599-7031-13	246.00
7145-986	0.2mm	0-100-0	0.002mm	.28mm	12.5mm	2mm	599-7032-13	269.00
7145-987	0.2mm	0-100-0	0.002mm	.38mm	12.5mm	2mm	599-7033-13	312.00



Dial Test Indicator

FEATURES:

- Adjustable bezel and dial
- Fully jeweled movement
- Wide face for easy reading
- 3 way Dovetail mounting
- Trigger response to lightest pressure
- Contact point adjustable through 230 Deg.
- Includes 5/32" and 3/8" mounting shanks



2

RANGE	GRAD.	DIAL DIAM.	READING	ORDER NO.	PRICE
0-.030"	.0005"	1.25"	0-15-0	3100-570	\$49.25



Pocket Test Indicator – Series 513

FEATURES

- Jeweled bearings assure higher sensitivity and accuracy.
- Reversible Measuring Direction.
- Two Holding Bars are supplied. One (1/2 x 1/4") is used with lathe tool posts and height gages, the other (.315" DIA.) with drill chucks. (Complete sets only.)
- Fully adjustable bezel/dial face. • Contact point is adjustable within 220°.
- Complete with accessories and compact carrying case.



513-504

12

ORDER NO. BASIC	LIST PRICE	GRADUATION	RANGE	DIAL READING	ACCURACY	REMARKS	ORDER NO. COMPLETE	LIST PRICE
513-504	\$151.00	.0001"	.01"	0-5-0	±.0002"	—	513-504T	\$176.00
513-512	174.00	.0005"	.02"	0-10-0	±.0005"	Long point	513-512T	182.00
513-518	129.00	.001"	.04"	0-20-0	±.001"	—	513-518T	138.00



Truetest™ Test Indicators Series 513

Mitutoyo introduces three new Series 513 indicators, each available in white or black dial face colors. Each indicator features:

- Smooth spindle movement for increased measuring accuracy.
- Water and dust resistant one-piece black bezel and hard coated crystal for improved durability.
- 20° tilted dial face for easy reading.
- Anti-magnetic characteristics.

513-443



513-443-06



Accessories
Swivel Clamp 900322
Square arm 900306
190318 (dia. 5/32")
190321 (dia. 3/8")
190322 (Nut)

Inch

12

12

ORDER NO. BASIC	LIST PRICE	RANGE PER GRAD.	REV. RANGE	DIAL READING	WIDE RANGE ACCURACY	DIMENSION L	REMARKS	ORDER NO. COMPLETE	LIST PRICE
513-442-10A	\$176.00	.0005"	.03"	.06"	0-15-0	±.0005"	.78" White Dial Face	513-442-10T	\$199.00
513-442-16A	176.00	.0005"	.03"	.06"	0-15-0	±.0005"	.78" Black Dial Face	513-442-16T	199.00
513-446-10A	235.00	.0005"	.03"	.06"	0-15-0	±.0005"	1.33" White Face Longpoint	513-446-10T	265.00
513-446-16A	235.00	.0005"	.03"	.06"	0-15-0	±.0005"	1.33" Black Face Longpoint	513-446-16T	265.00
513-443-10A	221.00	.0001"	.008"	.016"	0-4-0	±.0002"	.59" White Dial Face	513-443-10T	251.00
513-443-16A	221.00	.0001"	.008"	.016"	0-4-0	±.0002"	.59" Black Dial Face	513-443-16T	251.00

Measuring Instruments



Double The Range Of Other Test Indicators

FEATURES:

- Magnetic resistant
- Extremely low measuring pressure
- Two-way action - no reversing lever
- Dovetail & adjustable stem adaptation
- Precise repetitive readings
- Ball bearing and jewelled movement
- Carbide contact point swivels 210°
- Easy to read tilted dial

Vertical Models



7

MODEL NO. 312B-1V INTERAPID NO. 74.111377		MODEL NO. 312B-2V INTERAPID NO. 74.111378		MODEL NO. 312B-3V INTERAPID NO. 74.111957		MODEL NO. 312B-15V INTERAPID NO. 74.111958		MODEL NO. 312B-20V INTERAPID NO. 74.111379	
Ordering No.	7141-685	Ordering No.	7141-684	Ordering No.	7141-714	Ordering No.	7141-715	Ordering No.	7141-687
Range	.060"	Range	.060"	Range	.016"	Range	.060"	Range	.060"
Graduations	.0005"	Graduations	.0005"	Graduations	.0001"	Graduations	.0005"	Graduations	.001"
Dial Diameter	1.5"	Dial Diameter	1.0"	Dial Diameter	1.5"	Dial Diameter	1.5"	Dial Diameter	1.0"
Dial Reads	0-15-0	Dial Reads	0-15-0	Dial Reads	0-4-0	Dial Reads	0-15-0	Dial Reads	0-15-0
Price	\$296.00	Price	\$304.00	Price	\$369.00	Price	\$389.00	Price	\$281.00

Horizontal Models




MODEL NO. 312B-1 INTERAPID NO. 74.111370		MODEL NO. 312B-2 INTERAPID NO. 74.111371		MODEL NO. 312B-3 INTERAPID NO. 74.111372		MODEL NO. 312B-4V INTERAPID NO. 74.111373		MODEL NO. 312B-15 INTERAPID NO. 74.111965		MODEL NO. 312B-20 INTERAPID NO. 74.111374	
Ordering No.	7142-775	Ordering No.	7186-150	Ordering No.	7141-680	Ordering No.	7141-681	Ordering No.	7141-716	Ordering No.	7141-682
Range	.060"	Range	.060"	Range	.016"	Range	.016"	Range	.060"	Range	.060"
Graduations	.0005"	Graduations	.0005"	Graduations	.0001"	Graduations	.0001"	Graduations	.0005"	Graduations	.001"
Dial Diameter	1.5"	Dial Diameter	1.0"	Dial Diameter	1.5"	Dial Diameter	1.5"	Dial Diameter	1.5"	Dial Diameter	1.0"
Dial Reads	0-15-0	Dial Reads	0-15-0	Dial Reads	0-4-0	Dial Reads	0-4-0	Dial Reads	0-15-0	Dial Reads	0-15-0
Price	\$278.00	Price	\$276.00	Price	\$342.00	Price	\$347.00	Price	\$389.00	Price	\$281.00

Carbide Contact Points for Interapid Indicators



TIP DIAMETER	LENGTH	INTERAPID NUMBER	ORDERING NUMBER	PRICE EACH
.031"	11/16	74.105998	7141-649	\$24.00
.060"	11/16	74.105997	7141-648	24.00
.080"	11/16	74.105996	7141-647	24.00
.080"	1-3/4	74.111492	7141-698	37.00
.031"	1-3/4	74.111493	7141-699	37.00
.080"	2-3/4	74.111913	7141-713	31.00
.100"	2-3/4	74.111912	7141-712	37.00

Interapid Accessories



DESCRIPTION	INTERAPID NUMBER	ORDERING NUMBER	PRICE EACH
Height Gage Bar w/Clamp	74.106331	7141-651	\$67.00
Universal Clamp	74.108603	7141-663	41.00
Axial Support (Inch)	74.106931	7141-656	72.00



TESA

brown & sharpe.

Black Face Indicators

Easy to read, satin black, "jet-console" face. BesTest® Indicators with high visibility orange hand. Each BesTest® Indicator set comes complete with one carbide tip contact point, .080" diameter; One 1/2" long x .250" diameter extension with dovetail; One contact point wrench; One durable molded case; certificate of accuracy and traceability.

7

ORDERING NUMBER	RANGE	MARKING	SMALLEST DIVISION	DIAL DIA.	POINT LENGTH	TIP DIA.	B&S NUMBER	PRICE EACH
7151-732	.030"	0-15-0	.001"	1"	1/2"	.080"	599-7029-5	\$179.00
7151-733	.030"	0-15-0	.0005"	1"	1/2"	.080"	599-7030-5	183.00
7151-734	.030"	0-15-0	.0005"	1-1/2"	1/2"	.080"	599-7031-5	204.00
7151-737	.008"	0-4-0	.0001"	1"	1/2"	.080"	599-7032-5	245.00
7151-738	.008"	0-4-0	.00005"	1-1/2"	1/2"	.080"	599-7033-5	258.00
7151-735	.020"	0-10-0	.0005"	1"	1-7/16"	.080"	599-7034-5	228.00
7151-736	.020"	0-10-0	.0005"	1-1/2"	1-7/16"	.080"	599-7035-5	248.00



Measuring Instruments

Mitutoyo

Dial Test Indicator Universal Type - Series 513

FEATURES

- Universal application to all directions.
- No clutch structure for automatic reversal of measuring direction.
- Interchangeable contact point.
- Three dovetails for easier clamping.

Not only the direction of the measuring point, but also the direction of measurement itself can be adjusted 360 degrees without moving the indicator.



ORDER NO. BASIC	LIST PRICE	GRADUATION	RANGE	DIAL READING	ACCURACY	ORDER NO. COMPLETE	LIST PRICE
513-302G	\$411.00	.0005"	.03"	0-15-0	±.0005"	513-302GT	\$449.00

Fowler

Dial Test Indicators

- Jeweled movement.
- Bi-directional constant clockwise rotation.
- Automatic reversal.
- 3 dovetail mountings.
- 2 dovetail extensions.
- Includes molded case.



MODEL NUMBER	FACE COLOR	DIAL READING	GRAD- UATION	DIAL DIA.	POINT LENGTH	PRICE EACH
52-562-778	black	0-15-0	.0005"	1"	1/2"	\$72.69
52-562-780	black	0-15-0	.0005"	1-1/2"	1/2"	72.69
52-563-771	black	0-4-0	.0001"	1"	1/2"	110.56
52-563-772	black	0-4-0	.0001"	1-1/2"	1/2"	110.56
52-562-782	black	0-10-0	.0005"	1"	1-7/16"	75.83
52-562-784	black	0-10-0	.0005"	1-1/2"	1-7/16"	109.64

Fowler

FLEX MAG SET Chrome

Included Magnetic Indicator Back for mounting to most metal surfaces!
All packed in a Shop-Hardened case!

AGD Indicator features:

- AGD Group 2
- Dial diameter: 2-1/4"
- Travel: 1"
- Reading: .001"
- Continuous reading: .100"
- Carbide tipped point

Flex Arm Mag Base features:

- Corrosion resistant chrome plated flex arm.
- 85 lb. pull magnet
- Holds rigidly in almost any position.
- V-base for mounting on rounded surfaces.

Magnetic Indicator Back features:

- Use for positioning the indicator on most metal surfaces.
- Protective coating



MODEL NO.	DESCRIPTION	PRICE
52-585-500	Chrome Flex Mag Set	\$88.93

TESA

TESA
TECHNOLOGY

.0001 brown & sharpe.

Miti-Mite Magnet Base and Bestest® Indicator

This Bestest® Indicator set comes complete with one carbide tip contact point: .080" dia.; One contact point wrench; One 3/8" dia. x 2-1/2" long universal mounting attachment. The Miti-Mite has a ball and socket action and joined post to simplify positioning. Compact base has Vee for holding on round or flat iron or steel surfaces. Base dimensions approx. 1-1/4" sq. 1-1/4" high. Height to top of post is approx. 5". Supplied with one each: 7/32" diameter x 1-1/2" long post; 7/32" diameter x 4-3/8" long post; 5/16" diameter x 1-1/2" long post. The kit includes a fitted wooden case that accommodates additional accessories.



Includes:

- 599-7030-3 Indicator
- 599-7761 MITI-MITE Base
- Universal Mount • Wood Case
- Three Separate Posts

ORDERING NUMBER	DESCRIPTION	B&S NUMBER	PRICE EACH
7151-083	MITI-MITE Indicator Set	599-849	\$378.00

Fowler

XTRA MAG™ Combos

.030" Range Test Indicator Features:

- Reading: 0-15-0
- Graduation: .0005"
- Auto-reversing
- .080" diameter point

.060" Range X-Test Indicator:

- Range: .060"
- Graduation: .0005"
- Dial reading: 0—15—0
- Dial Diameter: 1-1/2"
- Jewelled movement
- Revolution counter
- Automatic reversal
- 210° Swivel arc
- Tungsten carbide points: .040", .080" and .120"



Virtually
unlimited
positioning as a
Universal Base!

Xtra Mag Base:

- 2 universal ball sockets
- Microfine adjustment screw
- 3-9/16" extension arm
- Dovetail mounting

MODEL NO.	DESCRIPTION	PRICE
52-585-105	Xtra Mag Only	\$41.97
52-585-100	.030" Range Test Indicator	111.63
52-562-105	.060" Range X-Test & Xtra Mag Combo	142.81

TESA

TESA
TECHNOLOGY

.0001 brown & sharpe.

Bestest® Universal Test Indicator Kit Back Plunger Indicator - 1-1/2" Dia.

Extremely valuable in the workshop, where many awkward machining situations arise, the back plunger indicator has been designed to ensure that the face of the dial can be seen by the operator. The 1/4" holding rod can be unscrewed if required. Supplied with a ball contact tip.

ORDERING NUMBER	DESCRIPTION	B&S NUMBER	PRICE EACH
7144-892	Universal Indicator Set	599-7739	\$342.00

Inch Indicator Set Includes:

- Universal Test Indicator 599-7039
- Swivel 599-7739-1
- Clamp 599-7739-2
- Hole Attachment w/Indicator Mounting Hole 599-7739-3
- Bar 599-7739-4
- Rod 599-7739-5
- Fitted Case for Indicator and Accessories 599-7739-9999



Measuring Instruments



Accessories For Bestest Indicators 7



Swivel Clamp
3/8" and 7/32" dia. mounting holes. Dovetail opposite 3/8" hole.

ORDERING NUMBER	B&S NUMBER	PRICE EACH
7151-853	599-7045-1	\$31.00



Universal Clamp
For mounting on dovetail or stud. 7/32" hole on swivel. Dovetail end has 7/32" hole and 5/32" hole adjacent to the dovetail.

ORDERING NUMBER	B&S NUMBER	PRICE EACH
7141-663	74-108603	\$41.00



Universal Dovetail Attachment
Chrome plated. 1/4" dia. x 2-1/2" long.

ORDERING NUMBER	B&S NUMBER	PRICE EACH
7144-869	599-7054	\$33.00



Lug-Back Bracket
Slot to 1/4".

ORDERING NUMBER	B&S NUMBER	PRICE EACH
7144-740	599-980-10	\$80.00



Combination BesTest Indicator Axial Support
For mounting indicator on dovetail or rod. Hinges allow indicator to be positioned for best to work. Stem is 3/8" (8mm) dia. Tool length is 5-1/4" (133mm).

ORDERING NUMBER	B&S NUMBER	PRICE EACH
7141-656	74-106931	\$72.00



Universal Swivel Clamp
Dovetail opposite 3/8" hole and V-side hole. Clamp screw range: 1/8" to 1/4".

ORDERING NUMBER	B&S NUMBER	PRICE EACH
7144-870	599-7055	\$109.00

Swivel Support (Long)
3/8" dia. x 3-5/8"



ORDERING NUMBER	B&S NUMBER	PRICE EACH
7144-859	599-7044	\$57.00

Rectangular Bar
Comes with all front-mounted Indicators. 1/4" thick x 1/2" high x 3" long with .220"



ORDERING NUMBER	B&S NUMBER	PRICE EACH
7144-862	599-7047	\$24.00



Universal Dovetail Indicator Holder

- 1/4" body diameter with 3" reach.
- Spring loaded holder locks in any of (4) 90 degree quadrants, and allows many variable angles of holding.
- Brass contact will not scar Indicator.

ORDER NO.	PRICE EACH
3100-430	\$9.00



Universal Dovetail Clamp Mounts indicators equipped with either dovetails or rods

- 1/4" and 1/8" mounting holes, adjustable hole up to 1/4", plus dovetail.

ORDER NO.	PRICE EACH
3100-400	\$9.75



Axial Support Bracket

- Used for mounting indicators with dovetails or rods.**
- 3/8" diameter body for secure clamping, with 5-1/4" overall reach.
 - Made in U.S.A.

ORDER NO.	PRICE EACH
3100-405	\$20.25



For Bestest Indicators Available Individually or as a Complete Set



ORDERING NUMBER	DESCRIPTION	B&S NUMBER	PRICE EACH
7144-861	Rectangular Bar 3/16" thick x 5/16" high x 3" long with .220" dia. stud	599-7046	\$32.00
7144-863	Round Bar 7/32" dia. with .163 stepped end; .220" dia. stud; 2-7/8" long	599-7048	23.00
7144-857	Swivel Support (Short) 3/8" dia. x 1" long	599-7042	53.00
7144-858	Angle Att. 3/8" hole with 3/8" dia. x 1" long	599-7043	57.00
7144-867	Extension with Dovetail .220" dia. x 1/2" long	599-7052	19.50
7144-868	Extension with Dovetail .250" dia. x 1/2" long	599-7053	19.50
7144-827	Carbide Ball Point .040" dia. x 1/2" long	599-7030-40	54.00
7144-829	Carbide Ball Point .120" dia. x 1/2" long	599-7030-120	55.00
COMPLETE SET			
7144-856	Complete Set of All Items Listed Above	599-7041	178.00

Pittsburg® ACCESSORIES 2

Universal Clamp

- An all purpose Clamp designed for use with all dovetail equipped indicators.
- Fits 5/32" and 7/32" shanks. • Made in U.S.A.

ORDER NO.	PRICE EACH
3100-401	\$21.25



Single & Double Jointed Holders

- Single Jointed:** 1/4" Diameter Body w/ 2-3/4" overall reach.
Double Jointed: 3/8" Diameter Body w/ 4-1/2" overall reach.

ORDER NO.	DESCRIPTION	PRICE EACH
3100-403	Single Jointed	\$30.25
3100-404	Double Jointed	28.50

- Fits all dovetail equipped Indicators.
- Secure clamping. • Made in U.S.A.



Indicator Swivel Joints

- Available with clamping ranges from 5/32" to 1/2"
- Overall length for all sizes is 1-3/4".



ORDER NO.	CLAMP HOLE	END HOLE	PRICE EACH
3100-414	5/16"	5/32"	\$7.00
3100-410	5/16"	1/4"	7.00
3100-416	3/8"	1/4"	7.00
3100-412	1/4"	1/4"	7.00
3100-418	5/16"	5/16"	7.00
3100-420	3/8"	5/16"	7.00
3100-422	3/8"	3/8"	10.00
3100-424	1/2"	3/8"	11.50

Button Contacts

- AGD 4-48 Threads.
- Made in U.S.A.

ORDER NO.	DIA.	PRICE EACH
3100-750	3/8"	\$2.70
3100-751	1/2"	3.10
3100-752	3/4"	3.50

Flat Contacts

- AGD 4-48 Threads.
- Made in U.S.A.



ORDER NO.	DIA.	PRICE EA.
3100-760	1/4"	\$4.80
3100-761	3/8"	4.80
3100-762	1/2"	5.20
3100-763	5/8"	5.50
3100-764	3/4"	6.70
3100-765	1"	8.90
3100-766	1-1/2"	14.30

Tapered Contacts

- Button style contact fits all AGD Group 1, 2, 3, 4 Dial Indicators
- AGD 4-48 Threads. • Made in U.S.A.



ORDER NO.	DIA.	PRICE EA.
3100-745	13/32"	\$1.90
3100-746	1"	1.90
3100-747	1-1/2"	2.30
3100-748	2"	2.90

Measuring Instruments



Individual Extension Points

- Made in U.S.A.



ORDER NO.	LENGTH	PRICE EACH
3100-352	0.500"	\$3.20
3100-353	0.750"	3.20
3100-354	1.000"	3.20
3100-355	1.250"	3.90
3100-356	1.500"	3.50
3100-357	1.750"	4.50
3100-358	2.000"	3.70
3100-360	2.500"	4.00
3100-362	3.000"	4.00
3100-366	4.000"	4.70
3100-374	6.000"	6.80

Extension Point Kit

3 Piece Set

- Includes 1", 2", and 3" indicator.
- Extension Points.
- Has 4-48 Internal and External threads.
- Made in U.S.A.

ORDER NO.	PRICE EACH
3100-385	\$8.20



Zeroset Indicator Set Up Attachment

Checks the alignment of round materials in relation to the cutting head.

- Equipped with a spindle post with 1/4", 3/8", and 1/2" diameters, and has an effective measuring range of 3/8" thru 9".
- Quick adjustments and fine adjustments.
- Made in U.S.A.



ORDER NO.	PRICE EACH
3100-406	\$83.25

Select-A-Point Kit

The most useful accessory for all dial indicators — a complete set of 22 different points.

- Fits all AGD 1, 2, 3, 4 drop style indicators.
- Made in U.S.A.

ORDER NO.	DESCRIPTION	PRICE EACH
3100-440	22 pc. Point Kit	\$8.25



Special Contacts

Popular specialized Contacts for Dial Indicators. Has 4-48 threads to fit all AGD Groups 1, 2, 3, 4 Indicators. Made in U.S.A.



DESCRIP-TION	ORDER NO.	PRICE EACH	DESCRIP-TION	ORDER NO.	PRICE EACH
Radius Contact	3100-770	\$ 4.90	1/4" Steel Ball	3100-775	\$12.20
Chisel Contact	3100-771	19.00	5/16" Cone Point	3100-776	12.20
Offset Chisel	3100-772	19.00	1/16" Needle Stud	3100-777	16.50
1/8" Steel Ball	3100-773	14.10	Roller Anvil	3100-778	35.60
1/8" Carbide Ball	3100-774	19.20			

Drop Dial Indicator Contact Tips

Available with Grade 25 Tungsten Carbide or Grade 25 Ruby Ball tips. Made in U.S.A.



TIP LENGTH	BELL SIZE	MATERIAL	THREADS	ORDER NO.	PRICE EACH
1/4"	3MM	Carbide	4-48	3100-780	\$10.70
1/4"	3MM	Carbide	M2.5	3100-781	10.70
1/2"	3MM	Carbide	4-48	3100-782	11.10
3/4"	3MM	Carbide	4-48	3100-783	11.60
1/4"	4MM	Carbide	4-48	3100-784	11.10
1/4"	4MM	Carbide	M2.5	3100-785	11.10
1/2"	4MM	Carbide	4-48	3100-786	11.60
3/4"	4MM	Carbide	4-48	3100-787	12.00
1/4"	3MM	Ruby	4-48	3100-790	12.00
1/4"	3MM	Ruby	M2.5	3100-791	12.00
1/2"	3MM	Ruby	4-48	3100-792	12.90
3/4"	3MM	Ruby	4-48	3100-793	13.30
1/4"	4MM	Ruby	4-48	3100-794	13.30
1/4"	4MM	Ruby	M2.5	3100-795	13.30
1/2"	4MM	Ruby	4-48	3100-796	13.80
3/4"	4MM	Ruby	4-48	3100-797	14.20

Replacement Points For Test Indicators



Mitutoyo (M1.7 x 0.35)

BALL	MATERIAL	TIP LENGTH	CATALOG NO.	PRICE
.040	Carbide	1/2"	3100-857	\$14.90
Fits Mitutoyo Indicator Models: 513-528, 513-504.				
.040	Steel	.700"	3100-847	\$7.10
.080	Steel	.700"	3100-846	7.10
.080	Carbide	.700"	3100-848	14.90
.120	Steel	.700"	3100-849	7.10
Fits Mitutoyo Indicator Models: 513-518.				
.040	Steel	1"	3100-850	\$7.10
.080	Steel	1"	3100-851	7.10
.080	Carbide	1"	3100-852	14.90
.120	Steel	1"	3100-853	7.10
Fits Mitutoyo Indicator Models: 513-512.				
.040	Steel	1-1/2"	3100-854	\$7.10
.080	Steel	1-1/2"	3100-855	7.10
.120	Steel	1-1/2"	3100-856	7.10

Fred V. Fowler(M1.6 x 0.35)

BALL	MATERIAL	TIP LENGTH	CATALOG NO.	PRICE
Fits Fowler Indicator Models: 52-560-005, 52-562-252, 52-562-452, 54-568-000				
.080	Steel	.780"	3100-817	\$ 8.25
.040	Carbide	.780"	3100-818	14.20
.080	Carbide	.780"	3100-819	14.20
.120	Carbide	.780"	3100-820	14.20
Fits Fowler Indicator Models: 52-562-253, 52-562-272, 52-562-273, 52-562-453				
52-562-473, 52-563-252, 52-563-253, 52-563-272				
52-563-273, 52-563-452, 52-563-453, 52-563-573				
.040	Carbide	1/2"	3100-821	\$14.20
.080	Carbide	1/2"	3100-822	14.20
.120	Carbide	1/2"	3100-823	14.20
Fits Fowler Indicator Models: 52-562-474, 52-563-474				
.040	Carbide	1-1/2"	3100-824	\$14.20
.080	Carbide	1-1/2"	3100-825	14.20
.120	Carbide	1-1/2"	3100-826	14.20
Fits Fowler Indicator Model: 52-555-022				
.080	Steel	3.077"	3100-827	\$18.70
Fits Fowler Indicator Models: 52-560-010, 52-560-015				
.080	Steel	.416"	3100-829	\$7.50

(Continued)

Measuring Instruments

Replacement Points For Test Indicators (Continued)



TESA
TECHNOLOGY

goetz brown & sharpe

Brown & Sharpe (M1.4 x 0.30)

BALL	MATERIAL	TIP LENGTH	CATALOG NO.	PRICE
Fits BesTest Indicator Model: 599-7021-3; 599-7022-3; 599-7023-6; 599-7024-3; 599-7029-3 and -5; 599-7030-3 and -5 and -6 and -13 and -14; 599-7031-3 and -5 and -6 and -13 and -14; 599-7032-3 and -5 and -6 and -13 and -14; 599-7033-3 and -5 and -13; 599-7037-3; 599-7038-3.				
.040	Carbide	1/2"	3100-800	\$13.80
.080	Carbide	1/2"	3100-801	13.80
.080	Steel	1/2"	3100-802	7.90
.120	Carbide	1/2"	3100-803	13.80
.120	Steel	1/2"	3100-804	7.90
Fits BesTest Indicator Model: 599-7034-3 and -5; 599-7035-3 and -5				
.040	Carbide	1-7/16"	3100-805	\$19.50
.080	Carbide	1-7/16"	3100-806	19.50
.080	Steel	1-7/16"	3100-807	17.30
.120	Carbide	1-7/16"	3100-808	19.50



Interapid (M1.7 x 0.35)

BALL	MATERIAL	TIP LENGTH	CATALOG NO.	PRICE
Fits Interapid Indicator Models: 599-7025-4, 599-7026-4, 599-7027-4, 599-7028-4, 312B-1 and -1V; 312B-2 and -2V; 312B-3 and -3V; 312B-4; 312B-20 and -20V 74.111373, 74.111377, 74.111378, 74.111379, 74.111957				
.031	Carbide	11/16"	3100-841	\$13.80
.060	Carbide	11/16"	3100-842	13.80
.080	Carbide	11/16"	3100-843	13.80
Fits Interapid Indicator Models: 74-111958, 74-111965; 312B-15 and -15V				
.080	Carbide	2-3/4"	3100-844	\$20.00
.100	Carbide	2-3/4"	3100-845	20.00



Dial Thickness Gages – Series 7

The Dial Thickness Gages offer a quick and efficient means of inspection with their convenient grip handle, thumb trigger and spring-loaded spindle. The various models cover a wide range of applications.



7326S

Inch

ORDER NO.	RANGE	RESOLUTION	DIAL INDICATOR ACCURACY	MEASURING FORCE	LIST PRICE
7304S	0-1.0"	.001"	±.002"	Measuring Force: Less than 2.0N	\$160.00
7322S*	0-1.0"	.001"	±.002"	Measuring Force: Less than 2.0N	188.00
7326S	0-.05"	.0001"	±.0002"	Measuring Force: Less than 1.5N	220.00
7300S	0-.5"	.001"	±.001"	Less than 1.4N	133.00

*Deep Throat

12



Thickness Gages

- Ideal for measuring thickness of thin gauge material, such as sheet metal
- Spindle of hardened stainless steel
- Measuring faces are hardened, ground and lapped for accuracy
- Easily held in natural grip
- Can be easily adjusted to zero by adjustment screw on frame
- Lightweight



Dial Thickness Gage

2

RANGE	GRAD.	READING	THROAT	ORDER NO.	PRICE
.4"	.0001"	0-10	1.22"	3101-034	\$65.00
.5"	.001"	0-100	1.02"	3101-036	65.00



Digimatic Thickness Gages with Absolute Encoder – Series 547

The Digimatic Thickness Gages incorporate Mitutoyo's new Absolute IDC or IDS Digimatic Indicators to provide error-free LCD readings as well as data output for SPC analysis.

FEATURES: IDC Types

- Zero/ABS • Inch/mm Conversion • +/- Direction Changeover
- Preset • SPC Output • Provide GO/±NG judgment function and the indication of the judgment result • Face Rotates 330°
- Battery life: 5000 Hrs. • Power supply: silver oxide cell (SR-44 1 pc.).

FEATURES: IDS Types

- Origin • ± Direction Changeover • Inch/mm Conversion
- ON/OFF • SPC Output • Battery Life: Approx. 20,000 Hrs.
- Power Supply: Silver oxide cell (SR-44 1 pc.).



547-300S
IDC TYPE

For SPC output:
order Connecting Cable
905338 (1m) or 905409
(2m). Replacement
Battery: 938882 (1 pc.)

Inch/Metric

7

ORDER NO.	TYPE	RANGE	LCD RESOLUTION	ACCURACY	REMARKS	LIST PRICE
Absolute IDS-Type						
547-500S	Flat	0-.47" 0-11.93mm	.0005" 0.01mm	.001"	Measuring Force: Less than 1.5N with SPC output	\$282.00
547-512S	Flat/Spherical Anvil (reversible)	0-.47" 0-11.93mm	.0005" 0.01mm	.001"	Measuring Force: Less than 1.5N with SPC output	290.00
Absolute IDC-Type						
547-300S	Flat	0-.4" 0-10.16mm	.0005" 0.01mm	.001"	Measuring Force: Less than 1.5N with SPC output	449.00
547-312S	Flat/Spherical Anvil (reversible)	0-.4" 0-10.16mm	.0005" 0.01mm	.001"	Measuring Force: Less than 1.5N with SPC output	451.00

Measuring Instruments

Mitutoyo Digital Hand Tachometers - Series 982



Contact Tachometer Order No. 982-551

Detection: Optical Coupler 20 pulses/rev.

Accessories Furnished:

- Four 1.5V AA Batteries.
- Two Cone Adapters.
- One Funnel Adapter.
- One FPM Measuring Wheel (6").

Non-Contact Tachometer Order No. 982-552

Detection Distance: 2–12".

Accessories Furnished:

- Four 1.5V AA Batteries.
- Thirty-five Reflective Tabs.

ORDER NO.	RANGE	ACCURACY	MASS	DETECTION	LIST PRICE
982-551	*1–25,000 rpm	±1, Range 1–599.9 rpm ±2, Range 600.0–25,000 rpm: ±0.006% and ±0.5 digit	.37 lb.	Optical coupler, 20 pulses per revolution	\$283.00
982-552	–	6–599.9 rpm: ±1rpm, 600.0–99,999 rpm ±0.006% and ±0.5 digit	.35 lb. adapter (.11 lb.)	Laser diode	352.00

* Equivalent surface speeds (FPM, YPM, MPM) obtained with proper adapters.

+ Overscale is indicated by all LCD digits showing decimal points.

Mitutoyo

Dial Snap Gages - Series 201 (Without Dial Indicator)

FEATURES

- Designed for quick inspection of diameters of cylinders and shafts in machining processes.
- Available without Dial Indicator.
- Wide (.53" x .47"), flat carbide anvils.
- Both front edges of the anvil are chamfered for easy insertion.
- Accepts all Dial Indicators and Electronic Gages with 375" diameter mounting stem.

Technical Data: Accuracy: Refer to the list of specifications

Anvil retracting stroke: .078" / 2mm Anvil positioning range: 1" / 25mm

Anvil flatness: .00004" / 1µm

Inch

ORDER NO.	RANGE	LIST PRICE	ORDER NO.	RANGE	LIST PRICE
201-151	0–1"	\$432.00	201-157	6–7"	\$622.00
201-152	1–2"	452.00	201-158	7–8"	645.00
201-153	2–3"	491.00	201-159	8–9"	684.00
201-154	3–4"	500.00	201-160	9–10"	719.00
201-155	4–5"	547.00	201-161	10–11"	757.00
201-156	5–6"	589.00	201-162	11–12"	786.00

Fowler

Internal & External Electronic Caliper Gages




Features:

- Robust housing
- Large LCD display
- Reading: .01"/.1mm/1/64ths
- Accuracy: .01"/.3mm/1/64ths
- Battery: CR2032
- Spring loaded with locking nut

ORDER NUMBER	DESCRIPTION	RANGE	PRICE EACH
54-554-630	Outside Caliper Gage	0–6"/150mm	\$34.58
54-554-730	Inside Caliper Gage	.5–6"/150mm	34.58

Mitutoyo

Combination Square Sets - Series 180




Inch

SET NO.	BLADE	SQUARE HEAD	CENTER HEAD	PROTRACTOR HEAD	LIST PRICE
180-903B	12" (4R)	180-501B	180-102B*	180-202B*	\$168.00
180-905B	12" (4R)	180-501B	180-102B*	180-202B* 180-301B†	292.00

* Hardened Cast Iron Heads. † Non-Hardened Heads.

Pittsburg[®] ALLEGHANY Combination Square Set

- Blades are fully hardened & tempered
- 4 piece Combination Set includes Square Head, Center Head, and Protractor Head. 3-piece Combination Set includes Square Head and Center Head
- Easy-to-read satin chrome finish blade, with micro-fine gradations
- Double-indexed Protractor is graduated 180° in both directions
- Square Head has level & scriber point



NO. PIECES	SIZE	GRAD.	ORDER NO.	PRICE
3	6"	4R	3101-260	\$42.50
4	12"	4R	3101-270	48.00



TESA



brown & sharpe


Combination Squares with Hardened Heads

Square Heads and Protractors are supplied with levels.

Square Heads also include a hardened steel scriber.

Sets listed below include hardened Square Heads and Center Heads. Sets include a Satin Chrome Blade. All blades are graduated in 8ths, 16ths, 32ths and 64ths, inch, metric, or inch/metric reading.

Combination Squares are also available in complete sets or components.



LENGTH OF BLADE	PIECES IN SET	B&S NUMBER	ORDERING NUMBER	PRICE EACH
12	Sq. Head	599-401-1204-1	7144-169	\$ 118.00
12	Sq. Head, Ctr. Head	599-400-1204-1	7144-159	166.00
12	Sq. Head, Ctr. Head, Proj. Head	599-425-1204-1	7144-183	250.00
12	Sq. Head, Ctr. Head, Rev. Proj. Head	599-438-1204-1	7144-193	265.00
24	Sq. Head	599-401-2404-1	7144-173	164.00
24	Sq. Head, Ctr. Head	599-400-2404-1	7144-163	227.00
24	Sq. Head, Ctr. Head, Proj. Head	599-425-2404-1	7144-187	256.00
24	Sq. Head, Ctr. Head, Rev. Proj. Head	599-438-2404-1	7144-197	322.00

Measuring Instruments

Mitutoyo Stereo Microscope - Series 377

Order no. 377-990A is a high-accuracy four-step magnification stereo microscope. With a horizontal changer allowing 6X, 12X, 25X, and 50X magnifications with standard 1X objective and 10X eyepieces, the MSM-465L model has limitless capabilities for electrical small part inspection.

- Superior quality optics provide high-resolution
- Crystal sharp, high color contrast image with excellent depth of field
- Always in sharp focus at all magnifications
- The Parfocal Optical System allows relaxed strain-free viewing
- Long working distance
- Extreme large field of view (23mm diameter)

[6]

ORDER NO.	DESCRIPTION	PRICE
377-990A	Binocular Stereo Microscope	\$1700.00

Optional Accessories

[2]

ORDER NO.	DESCRIPTION	PRICE
64AAB432	Moticam 580, 5.0 Megapixel, USB/HDMI	\$1250.00
377-488	Video Attachment Set (For K400)	340.00
64AAB214	LED Variable Ring Light For TM Series	190.00



Fowler

Deluxe Stereo Microscope

- 20—40x magnification
- Includes 2x and 4x objectives, 10x eyepieces, eyecups and dust cover.
- Sharp image definition
- Rack and pinion focusing.
- Two 3.5" (95mm) stage plates provided: Clear and reversible white/black.
- Top and bottom illumination.
- 15x and 20x eyepieces available



[6]

MODEL NUMBER	DESCRIPTION	PRICE
53-640-902	Deluxe Stereo Microscope	\$395.05

Fowler 9" Electronic Level

Fowler's 9" Laser Level provides instant 4 x 90° digital inclination display. With embedded magnets on its measuring surface, a beamsplitter projects a 90° laser cross hair for leveling at-a distance. It also includes a 1/4-20 mount for tripod use.

- Measuring range: 4 x 90° • Resolution: .05° • Accuracy: $\pm 2^\circ$ • Repeatability: $\pm .05^\circ$
- Standard 9 volt battery (250 hours life) • Dimensions: 9"L x 1"W x 2-1/4"H
- Includes two-way level and plumb vials. • Reversible reading for inverted use



[6]

MODEL NUMBER	DESCRIPTION	PRICE
54-440-600	9" Electronic Level	\$54.81

Fowler Electronic Protractor

The Digi-Pro 12"/300mm electronic protractor includes embedded magnets for unique measurement areas.

- Magnetic blade edges.
- Measuring range: $\pm 180^\circ$ • Accuracy: $\pm 0.1^\circ$
- Repeatability: $\pm 0.1^\circ$ • Resolution: .01°
- On/Off, Zero, and Hold features
- Voltage: Standard 3V lithium battery

[6]

MODEL NUMBER	DESCRIPTION	PRICE
54-440-775-1	Digi-Pro Electronic Protractor	\$76.78



Fowler

Portable Roughness Tester

- Small, compact size • Large LCD display
- 2 selectable parameters: Ra and Rz
- Meets ISO and DIN standards.
- N.I.S.T. traceable specimen included.
- Uses 9V battery (approx. 3000 measurements).
- Includes fitted case.
- * Specialty probes and RS232 output available.

[5]

MODEL NUMBER	DESCRIPTION	PRICE
54-410-500	.0004" Probe	\$1511.83
54-410-600	.0002" Probe	1511.83



Fowler X-Tread Tire Gage

For tire tread thickness measurement. Reads in inch, metric and fractions.

- Spring-loaded and hold measurement button for ease-of-use.
- Super-large display
- Range: 1"/25mm
- Resolution: .0005"/.01mm, fractions in 1/64" increments.
- Supplied in vinyl holster.
- 2.1" base
- .95" diameter rod

[6]

MODEL NUMBER	DESCRIPTION	PRICE
54-225-500	X-tread Tire Gage	\$16.40



Fowler

Mini-Mag Protractor

The NEW mini-MAG Protractor provides instant 360° digital inclination display of any angle with the additional unique feature of embedded magnets on both sides and the bottom which make it ideal for a variety of measurements.

- Embedded magnets with 35lb. pull.
- Uses standard 9V battery (250 hrs.)
- Measuring range: 360° (4 x 90°)
- Display inverts. • Resolution: .05°
- Accuracy: $\pm 2^\circ$ • Repeatability: .05°
- Hold feature.

[6]

MODEL NUMBER	DESCRIPTION	PRICE
54-422-450-1	Mini-Mag Protractor	\$69.08



Measuring Instruments

Fowler Bevel Protractor

- Magnifier for vernier.
- Includes 6" & 12" blades and an angle attachment.
- Satin chrome finish for easy readings.
- Graduation: 360°
- Reading to 5 minutes.
- Includes fitted case.



2

MODEL NUMBER	DESCRIPTION	PRICE
52-440-612	Bevel Protractor	\$117.75

Pittsburg Economy Universal Bevel Protractor w/Fine Adjustment



- 12" and 6" blades
- Protractor graduated 0-90 full 360°
- Optical magnifier
- Blade and protractor have independent locking provisions to allow maximum control

2

SIZE	ORDER NO.	PRICE
6",12" Blade	3101-310	\$75.00

Pittsburg Dial Reading Universal Bevel Protractor



ORDER NO.	PRICE
3101-312	\$99.00

- Advanced design displays digital read-out of ten degrees in dial window
- Indicator pointer shows each degree and five minutes of angle
- Tempered stainless steel
- Accurate ± 5 arc minutes, or 1/12 of a degree

GENERAL Steel Protractors

- Preferred by machinists, draftspeople, and mechanics for setting bevels, measuring, and transferring angles.
- Made of ground stainless steel for optimum accuracy.
- Permanently etched graduations from 0 to 180° in opposite directions.
- 3-3/8" x 2" head.
- 6" adjustable protractor arm locks into desired position with knurled thumb nut.
- Also available with satin chrome finish No. CF17.



8

MODEL	STYLE	ORDER NO.	PRICE
17	Square head	6922-018	\$16.28

Pittsburg Planer and Shaper Gage


- Makes setting of planer and shaper tools easy
- Set gage with Micrometer, Surface Gage, or caliper and bring cutting tool in contact with it. Also, use in conjunction with Dial Indicator to level large plates for planing, etc.
- Max range 1/4" to 6-1/4" with extension rod



2

RANGE	ORDER NO.	PRICE
1/4-6-1/4"	3101-315	\$84.00

GENERAL Steel Rules

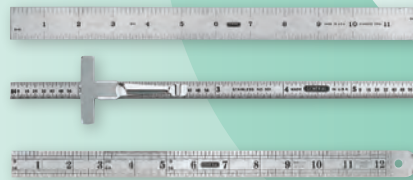


General industrial quality rules are precision made, with etched fine black graduations, on stainless steel or satin chrome finish.

MODEL	SIZE	GRAD TYPE	GRADUATION	SIDE 1	SIDE 2	WIDTH	ORDER NO.	PRICE
INDUSTRIAL - 6" PRECISION STAINLESS STEEL RULES								
616	6"	Flex	5R	10, 100	32, 64	15/32"	6932-096	\$6.24
676	6"	Rigid	4R	8, 16	32, 64	3/4"	6932-111	7.46
678med	6"	Rigid	-	mm, .5mm	10, 20, 50, 100, 16, 32, 64	3/4"	6932-114	7.38
INDUSTRIAL - 12" PRECISION STAINLESS STEEL RULES								
1201me	12"	Flex	-	16, 32, 64	8, 16	7/8"	6932-162	\$8.64
1216	12"	Flex	5R	10, 100	32, 64	15/32"	6932-174	10.62
ECONOMY - 6" PRECISION STAINLESS STEEL RULES								
300/1*	6"	Flex	-	32, 64	Dec. Equiv.	15/32"	6932-036	\$2.88
300me*	6"	Flex	-	mm, 64	Metric Equiv.	15/32"	6932-042	3.08
301/1*	6"	Flex	-	32, 64	-	1/4"	6932-046	2.20
305me	6"	Flex	-	mm, 16	-	15/32"	6932-060	2.70

*Furnished with pocket clip. †Dimensions are approximate.

GENERAL Multi Use Rule and Gages

- One of our most popular pocket tools performs five separate and distinct functions.
- Drill point gage is used for checking 59° angle drill points.
- Bevel protractor is used for measuring and laying out angles.
- Center finder locates centers of shafts or circles.
- Circle divider (up to nine equal parts) is used for dividing circles into sectors, regular polygons, and polygrams.
- Tap and drill table shows popular tap sizes with correct drill sizes for National form of thread.
- Made of long-wearing stainless steel.
- 4" rule has etched graduations in 64ths and millimeters.



8

MODEL	ORDER NO.	PRICE
16me	6922-015	\$12.80

Pittsburg 6" Stainless Steel Rules



3100-280



3100-285



3100-281



DESCRIPTION	ORDER NO.	PRICE
6" Flexible Steel Rule w/Clip Front: 32nd, 64th Back: Decimal Equivalent Chart	3100-281	\$1.35
6"/150mm Flexible Steel Rule w/Clip Front: 32nd, 1.0mm Back: Metric Equivalent Chart	3100-280	1.35
6"/150mm Rigid Steel Rule Front: 16th, 32nd, 64th / 10th, 20th, 50th Back: 0.5mm, 1.0mm	3100-285	1.70

Measuring Instruments

Mitutoyo Steel Rules – Series 182



FEATURES

- Clear Graduations On Satin Chrome Finish. • Tempered Stainless.

Full-Flexible Rules (Thickness 1/64")

ORDER NO.	SIZE	GRADUATIONS					WIDTH	ACCURACY (LENGTH)	LIST PRICE
182-201	6" (4R)	1/8	1/16	1/32	1/64th	1/2"		+.004"/-.0002" (+0.1mm/-0.05mm)	\$13.80
182-202	6" (16R)	1/32	1/64	1/50	1/100th	1/2"			13.80
182-203	6" (5R)	1/32	1/64	1/10	1/100th	1/2"			13.80
182-204	6" (3R)	1/32	1/64	1/10	1/50th	1/2"			13.80
182-205	6" x 150mm	1/32	1/64	1mm	1/2mm	1/2"			13.80
182-206	6" x 150mm	1/50	1/100	1mm	1/2mm	1/2"			13.80
182-207	6" x 150mm	1/10	1/100	1mm	1/2mm	1/2"			13.80
182-211	150mm	1mm	1/2mm	1mm	1/2mm	12mm			21.50
182-221	12" (4R)	1/8	1/16	1/32	1/64th	1/2"		+.005"/-.002" (+0.13mm/-0.05mm)	27.30
182-222	12" (16R)	1/32	1/64	1/50	1/100th	1/2"			27.30
182-223	12" (5R)	1/32	1/64	1/10	1/100th	1/2"			27.30
182-224	12" (3R)	1/32	1/64	1/10	1/50th	1/2"			27.30
182-225	12" x 300mm	1/32	1/64	1mm	1/2mm	1/2"			27.30
182-231	300mm	1mm	1/2mm	1mm	1/2mm	12mm			27.30
182-141	18" (4R)	1/8	1/16	1/32	1/64	3/4"			44.55
182-242	18" (16R)	1/32	1/64	1/50	1/100th	3/4"			44.55
182-243	18" (5R)	1/32	1/64	1/10	1/100th	3/4"			66.55
182-245	18" x 450mm	1/32	1/64	1mm	1/2mm	3/4"			66.55
182-251	450mm	1mm	1/2mm	1mm	1/2mm	18mm			69.75
182-261	24" (4R)	1/8	1/16	1/32	1/64	3/4"		+.006"/-.003" (+0.18mm/-0.08mm)	93.70
182-262	24" (16R)	1/32	1/64	1/50	1/100th	3/4"			93.70
182-263	24" (5R)	1/32	1/64	1/10	1/100th	3/4"			93.70
182-264	24" (3R)	1/32	1/64	1/10	1/50th	3/4"			93.70
182-265	24" x 600mm	1/32	1/64	1mm	1/2mm	3/4"			93.70
182-271	600mm	1mm	1/2mm	1mm	1/2mm	18mm			96.05

Pocket Steel Rule – Series 950

With Pocket Clip (thickness 1/64")



FEATURES

- Engraved on frontside only. • Backside: Inch/Metric equivalents.

ORDER NO.	SIZE	GRADUATION		WIDTH	ACCURACY (LENGTH)	LIST PRICE
950-300	6" x 150mm	1mm	1/64ths	1/2"	+.004"/-.002" (+0.1mm/-0.05mm)	\$8.75

Wide Rigid Rules (Thickness 3/64")

ORDER NO.	SIZE	GRADUATIONS					WIDTH	ACCURACY (LENGTH)	LIST PRICE
182-101	6" (4R)	1/8	1/16	1/32	1/64th	3/4"		+.004"/-.002" (+0.1mm/-0.05mm)	\$14.55
182-102	6" (16R)	1/32	1/64	1/50	1/100th	3/4"			14.55
182-103	6" (5R)	1/32	1/64	1/10	1/100th	3/4"			14.55
182-104	6" (3R)	1/32	1/64	1/10	1/50th	3/4"			14.55
182-105	6" x 150mm	1/32	1/64	1mm	1/2mm	3/4"			14.55
182-107	6" x 150mm	1/10	1/100	1mm	1/2mm	3/4"			14.55
182-111	150mm	1mm	1/2mm	1mm	1/2mm	19mm			14.55
182-121	12" (4R)	1/8	1/16	1/32	1/64th	1"		+.005"/-.002" (+0.13mm/-0.05mm)	31.05
182-122	12" (16R)	1/32	1/64	1/50	1/100th	1"			31.05
182-123	12" (5R)	1/32	1/64	1/10	1/100th	1"			31.05
182-124	12" (3R)	1/32	1/64	1/10	1/50th	1"			31.05
182-125	12" x 300mm	1/32	1/64	1mm	1/2mm	1"			31.05
182-131	300mm	1mm	1/2mm	1mm	1/2mm	25mm			31.05
182-241	18" (4R)	1/8	1/16	1/32	1/64	1-3/16"		+.005"/-.002" (+0.15mm/-0.05mm)	38.20
182-142	18" (16R)	1/32	1/64	1/50	1/100th	1-3/16"			38.20
182-143	18" (5R)	1/32	1/64	1/10	1/100th	1-3/16"			38.20
182-145	8" x 450mm	1/32	1/64	1mm	1/2mm	1-3/16"			38.20
182-151	450mm	1mm	1/2mm	1mm	1/2mm	30mm			38.20
182-161	24" (4R)	1/8	1/16	1/32	1/64	1-3/16"		+.006"/-.002" (+0.18mm/-0.05mm)	61.95
182-162	24" (16R)	1/32	1/64	1/50	1/100th	1-3/16"			61.95
182-163	24" (5R)	1/32	1/64	1/10	1/100th	1-3/16"			61.95
182-165	24" x 600mm	1/32	1/64	1mm	1/2mm	1-3/16"			61.95
182-171	600mm	1mm	1/2mm	1mm	1/2mm	30mm			61.95

© 2000 brown & sharpe.


Inch Chrome Finish Tempered Flexible Steel Rules

DIMENSIONS			GRADUATIONS/EDGE				B&S NUMBER	ORDERING NUMBER	PRICE EACH
L	W*	T*	1ST	2ND	3RD	4TH			
6"	1/2"	1/64"	1/10††	1/50††	1/32†	1/64†	599-323-603	7144-139	\$12.50
6"	1/2"	1/64"	1/8††	1/16	1/32†	1/64†	599-323-604	7144-140	12.50
6"	1/2"	1/64"	1/10††	1/100††	1/32†	1/64†	599-323-605	7144-141	12.50
6"	1/2"	1/64"	1/50	1/100	1/32	1/64	599-323-616	7150-133	12.50
12"	1/2"	1/64"	1/8	1/16	1/32	1/64	599-323-1204	7145-990	24.00
12"	1/2"	1/64"	1/10††	1/100††	1/32	1/64	599-323-1205	7145-380	24.00
18"	3/4"	1/64"	1/8	1/16	1/32	1/64	599-323-1804	7151-068	43.00
18"	3/4"	1/64"	1/10††	1/100††	1/32	1/64	599-323-1805	7146-483	43.00
24"	3/4"	1/64"	1/8	1/16	1/32	1/64	599-323-2404	7145-992	56.00
24"	3/4"	1/64"	1/10††	1/100††	1/32	1/64	599-323-2405	7145-991	56.00


Values for W (width) and T (thickness) are approximate. = Indicates Bull's Eye and numbered graduations.



No. 599-323-603



No. 599-323-604



No. 599-323-605

© 2000 brown & sharpe.

Inch Chrome Finish Tempered Hook Rules

DIMENSIONS			GRADUATIONS/EDGE				B&S NUMBER	ORDERING NUMBER	PRICE EACH
L	W*	T*	1ST	2ND	3RD	4TH			
6"	3/4"	3/64"	1/8	1/16	1/32†	1/64†	599-314-604-1	7150-134	\$28.00
6"	3/4"	3/64"	1/10	1/100	1/32†	1/64†	599-314-605-1	7146-485	29.00
12"	1"	3/64"	1/8	1/16	1/32†	1/64†	599-314-1204-1	7145-378	41.00
18"	1"	3/64"	1/8	1/16	1/32†	1/64†	599-314-1804-1	7151-072	55.00
24"	1"	3/64"	1/8	1/16	1/32†	1/64†	599-314-2404-1	7151-071	68.00

Values for W (width) and T (thickness) are approximate. = Indicates Bull's Eye and numbered graduations.



No. 599-314-604-1

Measuring Instruments

GENERAL®

Screw Pitch Gages

- These finely crafted measuring devices are used for gaging V, American National, or U.S. standard 60° threads.
- Gages are notched for measuring insidethreads of small holes and nuts as well as external threads.
- Set of 51 screw pitches combines all sizes from 4 to 84, including 11-1/2 and 27 pipe thread sizes.
- Knurled thumb nuts lock the case in an open or closed position.
- Also available in 22 pitch set No. 252 and metric No. 255mm.



MODEL	NO. OF PITCHES	SIZES	ORDER NO.	PRICE
251	51	4 to 84	6931-321	\$55.16
255mm	22	.35 to 6.0mm	6931-326	27.91

Pittsburg® Screw Pitch Gages



- Use for internal and external screw threads
- Locking device at each end to secure blades for storage or to position individual blades when in use
- Determine correct pitch by matching blade teeth with threads
- Each blade clearly marked with correct thread size

THREADS	NO. LEAVES	ORDER NO.	PRICE
4-42	30	3100-191	\$ 3.70
4-84	51	3100-190	7.00
4-42/0.25-6mm	55	3100-195	7.80

GENERAL®

Economy Feeler (Thickness) Gages

- All of our economy feeler gages have fine quality tempered steel leaves made to exacting tolerances.
- Each leaf is etched with both decimals of an inch and corresponding millimeter sizes.
- Nickel plated case has knurled locking nut for precise positioning.

26 Leaf Economy Gage

- General's best selling feeler gage provides precision accuracy at a reasonable price.
- 26 leaves include the following sizes: .0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .021, .022, .023, .024, and .025".
- Metric range from .037 to .635mm.
- 3" x 1/2" leaves.



MODEL	ORDER NO.	PRICE
230	6931-311	\$9.24

Mitutoyo Pitch Gages - Series 188, 950

FEATURES

- Pitch size is stamped on each gage.

ORDER NO.	RANGE	DESCRIPTION	LIST PRICE
950-253	4-84 TPI	Unified 60° (51 leaves)	\$53.60
188-121	0.4, 0.5, 0.75, 1.0, 1.25, 2.0, 2.5, 3.0, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0mm	Metric 60° (18 leaves)	25.55
188-151	4-42 TPI inch	Unified 60° (30 leaves)	54.35
	0.4-7mm	Metric 60° (21 leaves)	



Pittsburg® Thickness Gages

- 26 leaves from .0015" to .025". Each leaf size clearly marked. Overall size: 1/2 x 3"
- Made to close tolerances with high grade tempered steel.
- Edge of each leaf is rounded.



Order No. 3101-320 Price Each...\$6.25

Pittsburg® Radius Gage Set

- Rust and wear resistant satin chrome finish
- Each gage has five measuring surfaces with both convex and concave radii
- Each gage clearly marked
- A must for machinists, tool & die makers, inspectors, etc.
- Complete with fitted case

NO. PIECES	SIZES	ORDER NO.	PRICE
25	1/64, 1/32, 3/64, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 11/64, 3/16, 7/32, 15/64, 1/4, 17/64, 9/32, 5/16, 11/32, 3/8, 13/32, 7/16, 15/32, 1/2, 13/16	3101-325	\$26.00



GENERAL®

Feeler (Thickness) Gages

- Made of the finest high grade precision gage steel.
- Each leaf is etched w/ size numbers in thousandths for quick identification.
- Knurled lock nut holds the leaves in desired position.
- Gages conform to government specifications GGG-G-17b.



Straight Leaf • 3" leaves are 1/2" wide.

Pittsburg® Thread Measuring Triangles

Checks for Class of Thread on all 60° threads.

- Made in U.S.A.

ORDER NO.	PRICE EACH
3100-436	\$27.50



Pittsburg® Thread Measuring Wire Set

- Kit contains 48 wires, 16 different sizes
- Measures all 60° threads from 3 to 48 threads per inch
- Metric threads from 0.5mm - 6.0mm
- Thread chart included

ORDER NO.	PRICE
3100-435	\$11.65



GENERAL®

Wire Gage

- American Standard wire gage 0 to 36 used for gaging non ferrous wire and metals such as copper, brass, and aluminum.
- Chrome finished, heavy gage hardened and tempered tool steel.
- Decimal equivalents of each size are stamped on reverse side.
- 3-1/4" diameter, 3/32" thick.



MODEL	ORDER NO.	PRICE
20	6922-036	\$27.56

GENERAL®

Sheet Metal Gage

- For gaging uncoated sheet metal, plate iron, and steel.
- Gage numbers are U.S. Standard 0 to 36, based on weights in ounces per square inch.
- Decimal equivalents of each size are stamped on reverse side.
- Chrome finished, heavy gage tool steel is hardened and tempered.
- 3-1/4" diameter, 3/32" thick.
- Conforms to government specifications GG-G-86b.



MODEL	ORDER NO.	PRICE
21	6922-041	\$26.42

Measuring Instruments

Huot Drill Gages ²

- Economical gauge made from prime steel and finished.
- For measuring 1/16" to 1/2" by 64ths drill bits.
Dimensions: 6" W x 3" D. **ORDER NO. 1919-000...\$3.00**
- For measuring #1 to 60 wire gauge drill bits.
Dimensions: 5-1/4" W x 2" D. **ORDER NO. 1919-001...\$7.20**
- For measuring tools 1/2" to 1" by 64ths.
Dimensions: 13" W x 5" D. **ORDER NO. 1919-002...\$14.70**



GENERAL® Reference Table



MODEL	ORDER NO.	PRICE
715	6935-015	\$8.50

- Essential tap drill and decimal equivalents reference table for toolmakers, machinists, and mechanics.
- Front has machine screw size tap drill chart for recommended 75% depth thread.
- Back has decimal equivalents table in 64ths from 1/64" to 63/64".
- For National Fine and National Special series of machine screws.
- Convenient 6" rule is graduated in 64ths.

GENERAL® Hobby Drill Gage




- Heavy gage stainless steel gage conveniently identifies drill bit sizes.
- Etched graduations are filled in black to give high contrast and will not wear off.
- Gage measures 2-3/8" x 6-3/4" overall.
- Stainless steel will not rust.

MODEL	SPECIFICATIONS	ORDER NO.	PRICE
24	Fractional size drills 1/16" to 1/2" x 64ths	6922-011	\$7.60

GENERAL® Drill Gages



No. 14



No. 15


- General's drill gages are used to quickly and conveniently identify drill bit sizes.
- Made of heavy gage steel, machined and ground to close tolerances.
- Hole sizes and decimal equivalents are permanently etched on the face.
- Nos. 14 & 15 are 6-1/2" x 2-1/2" wide.
- Conforms to government specifications GG-G-86b.

MODEL	SPECIFICATIONS	ORDER NO.	PRICE
14	Fractional size drills 1/16 to 1/2 x 64ths	6922-009	\$15.26
15	Number size drills 1 to 60	6922-012	15.66

Mitutoyo Small Hole Gages - Series 154

FEATURES

- Extra long for gaging deep and shallow holes, slots and similar work.
- Gaging surface is full-round with a flat bottom, and fully hardened to ensure long tool life.
- Supplied set of 4 gages in a fitted case.



154-901

¹²

ORDER NO.	RANGE	DIMENSIONS			REMARKS	LIST PRICE
		B	C	D		
154-105	.125-.2"	.88"	3.54"	.21"	—	\$25.40
154-106	.2-.3"	1.18"	3.84"	.21"	—	26.00
154-107	.3-.4"	1.37"	4.04"	.33"	—	27.80
154-108	.4-.5"	1.57"	4.25"	.33"	—	32.75
154-901	.125-.5"				Set of 4 Gages	112.00

Mitutoyo Telescoping Gages Series 155 (5/16"~6")



¹²

ORDER NO.	RANGE	DIMENSIONS				REMARKS	LIST PRICE
		A	B	C	D		
155-121	.315-.50"	.12"	.16"	4.33"	.20"	—	\$27.80
155-122	.50-.748"	.14"	.20"	4.33"	.22"	—	31.00
155-123	.748-1.26"	.14"	.20"	4.33"	.22"	—	32.75
155-124	1.26-2.126"	.23"	.29"	5.90"	.31"	—	34.60
155-125	2.126-3.54"	.23"	.29"	5.90"	.31"	—	40.15
155-126	3.54-5.90"	.23"	.29"	5.90"	.31"	—	45.05
155-903	.315-.50"					Set of 6 Gages	205.00
155-904	.50-.90"					Set of 5 Gages	180.00
155-907	.315-2.126"					Set of 4 Gages	121.00

Pittsburg® Telescoping Gages

6 Piece Set

- Plunger or gage expands in hole to be measured, locks in place and gage is removed from hole. Final hole size is obtained by measuring over contacts with a micrometer.
- Rigid handle with self-centering feature
- Constant spring tension for uniform feel
- Uniform contact pressures
- Contact points are of hardened tool steel and precision ground on the end
- Satin chrome finished
- Supplied in fitted carrying case



RANGE	ORDER NO.	PRICE
5/16-6"	3100-936	\$21.00

²

TESA | Wood brown & sharpe.

Telescoping Hole Gages

- Satin-chrome finish. Completely assembled with handle. Knurled lock maintains the setting of the measuring arms to permit sizing with a micrometer or caliper.
- The 4 Piece Set covers the range 5/16" diameter to 2-1/8" diameter.
- The 6 Piece Set covers the range 5/16" diameter to 6" diameter



⁷

DESCRIPTION	B&S NUMBER	ORDERING NUMBER	PRICE EACH
4 Piece Set	599-591-10	7145-368	\$ 127.00
6 Piece Set	599-591-20	7145-369	160.00

Pittsburg® Small Hole Gages - 4 Piece Set

- Knurled knob at end of handle adjusts gage to hole size. Reading is obtained by measuring over contact points with a micrometer.
- Full Ball style constructed with a flat bottom, permitting use in smallest of holes, slots, grooves, etc.
- Half Ball construction allows use in shallower applications, not accessible with Full Ball gage
- Gaging surface fully hardened for long life
- Supplied in fitted carrying case



²

RANGE	DESC.	ORDER NO.	PRICE
.125"-.500"	Half Ball	3100-940	\$22.00
.125"-.500"	Full Ball	3100-941	22.00

Measuring Instruments



TESA
TECHNOLOGY

brown & sharpe

Small Hole Gage Set

Use like a telescoping gage for measuring small diameter holes, slots and grooves. The flat bottom of half-ball gaging surface permits using the gage in even the shallowest recesses. Sensitive knurled knob setting. The entire tool is finished in satin chrome to prevent corrosion. Range .125" to .500" (3.18 to 12.7mm).



7

DESCRIPTION	B&S NUMBER	ORDERING NUMBER	PRICE EACH
Small Hole Gage Set	599-596	7151-885	\$123.00



TESA
TECHNOLOGY

brown & sharpe

Wiggler Set

Four interchangeable attachments accurately indicate tool-spindle positions relative to ground surfaces, gage blocks, buttons, holes, slots or crossed layout lines. A great convenience in making precise setups. Chrome plated.

7

DESCRIPTION	B&S NUMBER	ORDERING NUMBER	PRICE EACH
Wiggler Set With Case	599-795	7144-597	\$80.00
COMPONENT PARTS DESCRIPTION	B&S NUMBER	ORDERING NUMBER	ORDERING NUMBER
Ball Contact Attachment (.250" dia.)	599-795-11	7144-598	\$ 12.50
Disc Contact Attachment (.100" dia.)	599-795-12	7144-599	10.50
Off-Set Indicator Holder	599-795-13	7144-600	12.50
Needle Point Attachment	599-795-14	7144-601	15.50
Shank	599-795-15	7144-602	21.00



TESA
TECHNOLOGY

brown & sharpe

Edge Finders

7

DESCRIPTION	DIAMETER	B&S NUMBER	ORDERING NUMBER	PRICE EACH
Single End	.500" dia.	599-792	7144-595	\$16.50
Double End	.200/.500" dia.	599-792-1	7144-596	22.50
Double End	5/10mm dia.	599-792-10	7145-701	40.00



Locate round or flat work easily within .0005". To use, just place in a standard 1/2" diameter collet or chuck. As the collet or chuck rotates and approaches the edge of the work, the head moves sideways about 1/32", and the center of the finder is exactly one half of the head diameter away from the edge of the work.



Edge Finders




- Used to locate work surfaces and edges quickly, easily and accurately shoulders, grooves, center points and scribed lines
- Time-saving positioning tool for Jig Borers, Milling and other machines
- All parts are hardened and centerless ground to precise tolerances

2

END	TIP	BODY DIAM.	ORDER NO.	PRICE
Single	.500	1/2	3131-755	\$3.75
Double	.200 & .500	1/2	3131-760	4.05
Single	.200	3/8	3131-765	4.85
Double.200 & .500 w/Center Pt.		1/2	3131-770	5.65
Double.200 & .375 w/Center Pt.		3/8	3131-775	4.65
Single	.200	1/2	3131-780	4.05
Single	.375 w/Center Pt.	3/8	3131-785	3.85
Single	.500 w/Center Pt.	1/2	3131-790	4.65



Electronic Edge Finder



- Six equally spaced light ports provide visibility at any angle.
- Made in the USA
- Read off any electrically conductive metal.
- Edge finder lights instantly when stylus touches work edge.
- Repeatability: .0002", .200" point dia.
- Furnished complete with bulb and AAA alkaline battery.

6

MODEL NUMBER	DESCRIPTION	PRICE
54-575-600	Electronic Edge Finder	\$24.18



Edge Finders

- General's edge finders accurately locate working edges, shoulders, grooves, center points, and scribed lines.
- Time-saving positioning tools for jig borers, milling, and other machines.
- Hardened and centerless ground to precision tolerance.
- All sizes 3" long.



8

MODEL	END	SIZE	SHANK	ORDER NO.	PRICE
260	Single	.500"	1/2"	6931-329	\$17.25
262	Double	.200" and .500"	1/2"	6931-331	21.62
263	Single	.200"	3/8"	6931-334	18.12
264	Double	.200" and point	1/2"	6931-337	26.17



Flat Leg Pattern Dividers and Calipers

8

- Flat leg dividers and caliper legs are forged of special caliper steel.
- Hardened and tempered bow springs and fulcrum spools assure uniform tension without side play.
- Adjusting screw has a self seating washer and nut to permit quick and positive adjustment.
- Dividers have hardened points.
- Calipers have hardened measurement faces.
- Meet government specifications GGG-C-95.



DIVIDERS

MODEL	SIZE	ORDER NO.	PRICE
450-6	6"	6931-601	\$18.41



OUTSIDE CALIPERS

MODEL	SIZE	ORDER NO.	PRICE
452-6	6"	6931-618	\$17.72




INSIDE CALIPERS

MODEL	SIZE	ORDER NO.	PRICE
454-6	6"	6931-639	\$19.20

Measuring Instruments



Parallel Sets ²




- Made from high quality alloy steel, hardened and ground
- All pairs are precision machined
- Dimensions: 6" Length by 7/8" to 1-3/4" by 8ths
- Accuracy: +/- 0.0003" parallelism +/- 0.0003" to size in height



- Made from high quality alloy steel, hardened and ground
- All pairs are precision machined
- Dimensions: 6" Length by 3/4" to 1-3/4" by 8ths
- Accuracy: +/- 0.0003" parallelism +/- 0.0003" to size in height

# PAIRS	WIDTH	LENGTH	ORDER NO.	PRICE
8	1/2"	6"	3100-207	\$130.00

# PAIRS	WIDTH	LENGTH	ORDER NO.	PRICE
9	1/4"	6"	3100-206	\$95.00



- Made from high quality alloy steel, hardened and ground from 1/8" stock
- 10 pairs with the following heights: 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-5/8"
- Accuracy: +/- 0.0002" parallelism in height +/- 0.001" to size in height

# PAIRS	WIDTH	LENGTH	ORDER NO.	PRICE
10	1/8"	6"	3100-203	\$80.00

• Ideal for layout work, standards and set-ups, these matched pair parallels make machine shop work easier and quicker. The holes are designed for easier handling and set-ups.



- The sides with the holes are ground and matched in pairs
- Accuracy: +/- 0.0003" parallelism on two sides, top and bottom +/- 0.0007" on dimensions
- Hardness: 55 to 62 RC on two sides, top and bottom only

# PAIRS	WIDTH(S)	LENGTH	ORDER NO.	PRICE
4	3/16 & 1/2"	6"	3100-200	\$75.00
4	3/16"	6"	3100-201	65.00
4	1/2"	6"	3100-202	85.00

USA 1/4" Parallel Set Made in USA 1/4" thick Parallel Set – in custom fitted plastic box.



Made in USA



- 9 Pairs in Set.
- Hardened Steel. 6" Length x 1/8" Thick.
- Heights: 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-5/8", 1-3/4".
- Parallel within +/- 0.0005" each pair.
- Heights matched within +/- 0.001 each pair.

²

ORDER NO.	PRICE EACH
3100-205	\$225.75

Pittsburg Alleghany Adjustable Parallel Sets



- Precision steel machined to very close tolerances
- Each parallel consists of two ground pieces which slide smoothly on each other and can be locked in position for micrometer measurement
- Ideal for layout work, for gauging and in various set-ups for milling machines and grinders

²

PCS PER SET	RANGE	ORDER NO.	PRICE
4	3/8" to 1-5/16"	3101-210	\$29.50
6	3/8" to 2-1/4"	3101-212	48.00



TESA

Good brown & sharpe Adjustable Parallel Sets

Quickly adjusted to size using just a micrometer. Clamp screws lock parallels to size. Each parallel has a generous range, eliminating the need for stocking many solid parallels.

⁷

SET TOOL RANGE	INCH	METRIC	TOOLS IN SET	B&S NUMBER	ORDERING NUMBER	PRICE EACH
3/8" to 1-5/16"		(10 - 33mm)	4	599-673-10	7144-515	\$ 129.00
3/8" to 2-1/4"		(13 - 57mm)	6	599-673-20	7144-516	176.00



USA Thin Parallel Set Our brand new Made in USA 1/8" thick Parallel Set – in custom fitted plastic box.



Made in USA




- 10 Pairs in Set.
- Hardened Steel. 6" Length x 1/8" Thick.
- Heights: 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-5/8"
- Parallel within +/- 0.0008" each pair.
- Heights matched within +/- 0.001 each pair.

²

ORDER NO.	PRICE EACH
3100-204	\$158.25

Pittsburg Alleghany Thin Parallel Set



- Precision ground and hardened
- Gun-blued on non-working surfaces
- Set work pieces to needed height in vise jaws in seconds. Two 1/4" holes are provided for mounting.
- Complete set of 4 pairs of parallels 5/32" thick by 3" long in 1/2", 5/8", 3/4", and 7/8" widths allows drilling through work near edges without hitting parallels
- Packaged in plastic container

²

# PAIRS	WIDTH	LENGTH	ORDER NO.	PRICE
4	5/32"	3"	3101-200	\$12.80



Premium Brand 1/32" Parallel Set

²

MODEL NUMBER	DESCRIPTION	PRICE
52-437-031	Parallel Set	\$133.97

- Made from high-grade alloy steel, hardened and ground from 1/32" stock with 2 holes in each parallel.
- 10 pairs, 6" length, 1/32" width.
- 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2" & 1-5/8"
- Height specifications relate to consistency within each pair. Absolute heights are nominal.
- Parallelism: +/- .0001"



Measuring Instruments

Pittsburg[®] Thin Angle Sets

1/2 Degree through 5 Degrees Set –
Bar Size 5/32" x 3-1/2"

Precision ground on working surface. Gun-blued on non-working surfaces. Two 1/4" holes are provided for mounting. By using two angles, this set will span 1/2° through 5-1/2° in half-degree increments, and up to 9 degree in 1 degree increments

6 Degree through 10 Degree Set – Bar Size 5/32" x 3-1/2"

Combine this set with the above set to obtain 1/2 degree through 10-1/2 degree in 1/2 degree increments, or 1 degree through 19 degree can be obtained.



DESCRIPTION	ORDER NO.	PRICE
1/2 Deg – 5 Deg	3101-201	\$12.20
6 Deg – 10 Deg	3101-202	10.50

Pittsburg[®] Angle Block Sets


- Simple, quick angle set-ups
 - Eliminate calculations/errors
 - Oil hardened steel, precision ground
 - Lightly magnetized for better hold
 - 3" long x 1/4" thick; Accuracy: +/- .0001" per inch
- Furnished in 1 degree increments to 5°, and in 5 degree increments to 30 degrees. With the addition of the optional 1/4 degree and 1/2 degree blocks, virtually any conceivable angle to these increments can be obtained.



DESCRIPTION	ORDER NO.	PRICE
10 Piece Set	3101-220	\$67.50
1/4 Deg Block	3101-221	6.95
1/2 Deg Block	3101-222	6.95

Pittsburg[®] Solid Angle Plates

- Made of hardened steel
- Precision ground angles for convenient set-ups in tooling, production and inspection
- Four holes for easy mounting
- Tolerance: +/- 10 Minutes




SIZE	ANGLE	ORDER NO.	PRICE
3 x 3 x 5/16	45/45/90	3101-230	\$15.00
3 x 3 x 5/16	30/60/90	3101-232	15.00
2 Piece Set		3101-235	28.00

2

Pittsburg[®] Universal Angle Block 8-Piece Sets

- No sine vise, sine plate, angle vise, angle chart or block gage needed
- The combination of 10, 15 and 30 degree V-Blocks and 5 Angle Plates, 1 to 5 degree, provide fast and easy set-ups at various angles in 1 degree increments
- V-Block Dimensions: 3" L x 1-3/16" W x 1-3/16" H
- Angle Plate Dimensions: 2-3/4" L x 1-3/16" W x 5/64" H at narrow end
- Hardness: 45-50 RC
- Tolerance: +/- 10 Seconds

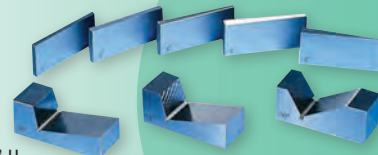


LENGTH	WIDTH	HEIGHT	ORDER NO.	PRICE
3"	1-3/16	1-3/16	3101-225	\$77.50

2

Pittsburg[®] 0-60° Precision Angle Block

- 0-60 degree Adjustable angle by locking the hex screw on the bottom
- Squareness: 0.0002"
- Angle accuracy: +/- 10 Minutes
- HRC: 50-55




DIMENSIONS	V-WIDTH	ORDER NO.	PRICE
7/8 x 1-1/4 x 3	7/8"	3101-240	\$67.50
1-3/16 x 1-7/8 x 4	1-1/8"	3101-242	72.50
1-13/16 x 1-7/8 x 4	1-13/16"	3101-244	77.50

2

Pittsburg[®] 1-2-3 and 2-4-6 Blocks

- Ideal for mounting work for precision grinding, lay-out work, etc.
- Precision ground and hardened to 56-60 RC on all six sides
- 23 Hole blocks have 5 tapped holes for clamping operations and 18 untapped holes
- The cross-drilling design gives minimum weight and maximum strength
- Supplied in matching pairs

SIZE	DESCRIPTION	ORDER NO.	PRICE
1-2-3	One Hole	3101-250	\$45.00
1-2-3	23 Hole	3101-251	21.00
2-4-6	23 Hole	3101-252	175.00

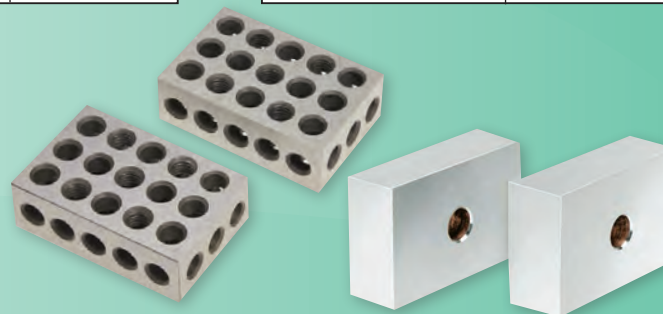

2

Fowler V-Block Set

- 2 each @:
- Dimensions: 1-1/2" L x 1-1/4" W x 1-1/4" H.
 - Work capacity: Approx. 1"
 - 2 clamps
- 2 each @:
- Dimensions: 2" L x 1-1/2" W x 1-1/2" H.
 - Work capacity: 1-1/2"
 - 2 clamps

- All feature:
- Surfaces are square and parallel within .0005".
 - V-grooves are square and parallel with all surfaces within .0005".
 - Corresponding dimensions for each pair are alike within .0005".
 - All enclosed in shop-hardened case.



MODEL NUMBER	DESCRIPTION	PRICE
52-475-500	X-Blox V-Block Set	\$122.44

2

Pittsburg[®] Precision V-Block Sets w/ swing away clamp

- Quick accurate and positive means of holding workpieces for layout, machining, grinding or inspection
- One reversible swing-away clamp provided with each V-Block. Combined with unique offset hole pattern in the top of the V-Block, a variety of clamping possibilities are allowed.
- All V-Blocks are parallel, square and centered within 0.0002"

CAPACITY	HEIGHT	WIDTH	LENGTH	ORDER NO.	PRICE/PR
19/32"	1-3/16"	1-3/8"	1-3/8"	3100-157	\$42.00
1-3/16"	2"	2-3/8"	2-3/8"	3100-158	69.50
2-9/16"	3-1/16"	4-1/8"	4-1/8"	3100-159	98.00



2

Pittsburg[®] Magnetic Chuck V-Blocks & Parallels

- Holds work in any direction on magnetic chucks
- Selected steel is integrally aluminum cast for highest magnetic transfer
- Precision ground on all surfaces
- Serial numbered in pairs
- V-Blocks have two 90° V's



2

SIZE	DESCRIPTION	LARGE V	SMALL V	ORDER NO.	PRICE
1-7/8 x 2-3/8 x 2	V-Blk Pair	2" Cap	1/2" Cap	3131-725	\$49.75
1-7/8 x 2-3/8 x 4-3/8	One V-Blk	2" Cap	1/2" Cap	3131-730	49.75
1 x 2 x 4	Paral Pair	—	—	3131-720	39.75
	Comb Set - Small V-Block Pair & Parallel Pair			3131-732	79.75

Measuring Instruments

Pittsburg® V-Blocks & Clamps

- All sides are ground square and parallel to each other
- Sturdy enough to be used in Machining Operations
- Accurate enough to be used in layouts and surface plate work
- The 1-3/4 x 2-1/2 x 2-3/4 and 2-3/4 x 3-1/2 x 4-7/8 models are designed so that the clamps do not protrude over the sides; thus the tool can be used on its sides
- 90° V's are ground central, parallel, and square to the ends
- Precision ground; matched and numbered in pairs
- Matched accuracy 0.0002"



CAPACITY	HEIGHT	WIDTH	LENGTH	ORDER NO.	PRICE/PR
1"	1-1/4"	1-1/4"	1-5/8"	3100-175	\$21.15
1"	1-3/8"	1-5/8"	1-3/4"	3100-170	30.40
1-1/2"	1-5/8"	1-3/4"	2-3/4"	3100-160	45.80
1-1/2"	1-3/4"	2-1/2"	2-3/4"	3100-165*	62.35
2-1/8"	2-3/4"	3-1/2"	4-7/8"	3100-176*	113.85

*Designed so clamps do not protrude over the sides

Pittsburg® Hardened Steel Wide Beam Straight Edge Square

- Length of blade is measured from inner edge of beam to end of tables
- Beams and blades are ground and accurately lapped for straightness and parallelism.
- All squares are fully hardened (55RC) • Accuracy Class N. • Packed in individual cartons
- Beam is grooved at inner corner for clearance of burrs and dirt

BLADE	BEAM	ORDER NO.	PRICE
1-3/8"	1"	3100-060†	\$14.05
2-3/8"	1-3/8"	3100-062	15.59
3-1/8"	2"	3100-064	17.97
5"	3"	3100-066	22.89
6-3/4"	4"	3100-068	26.17
8-1/2"	5-1/8"	3100-070	33.64
10-1/2"	6-3/8"	3100-072	46.85

† Limited Quantity

Pittsburg® Master Precision Level

- This is a Master Precision level for accurately checking the work of machinists and toolmakers, the setting up of machinery and other work that requires extreme leveling accuracy
- The main level vial is graduated to 10 Second accuracy (1 division equals .0005" per foot)
- An auxiliary level enables the user to check side declinations
- The body of the level is of cast iron and the base is hand scraped for extreme accuracy
- There are plastic knobs on the frame to insulate the instrument from the heat of the hand
- Includes fitted case

SIZE	ORDER NO.	PRICE
8"	3100-008	\$106.50
12"	3100-012	144.41



Pittsburg® Precision Sine Bars



- Both Sine Bar and Rolls are hardened and ground for extreme accuracy
- Top surface is accurate to .0003" per inch of length
- Parallelism 0.004"
- Center to center distance between center of rolls is accurate within .0002"
- There is a flange on the end for resting work
- Tapped holes allowing hold down

DISTANCE BTWN. CENTER OF ROLLS	DESCRIPTION	WIDTH	ORDER NO.	PRICE
5"	Sine Bar	15/16"	3100-135	\$54.15
10"	Sine Bar	1-1/4"	3100-136	129.64
5"	Sine Plate	2"	3100-137	91.90

Pittsburg® Demagnetizer

- Use to remove residual magnetism from dies, punches, cutters or any other tools that have become magnetized
- Operates on 115V AC with on-off switch




ORDER NO.	PRICE
3101-060	\$56.00

Pittsburg® Magnetic Chucks

- High powered Permanent Magnetic Chucks hold work pieces for machining, grinding, etc.
- Solid top and bottom plates assure retained accuracy
- Full loading power over entire plates • Can be switched off to remove work piece
- Pole divisions are arranged for holding small, thin or large pieces

DESCRIPTION	DIMENSIONS	ORDER NO.	PRICE
Rect.	6" x 12"	3131-700	\$280.80
Rect.	6 x 18"	3131-705	381.40
Round	10"	3131-710	184.85
Round	10"	3131-715	358.15



Pittsburg® Magnetic V-Block

- Ideal for holding cylindrical workpieces for scribing, grinding, measuring and machining
- Powerful holding force with fixed On/Off switch
- Precision ground finish for use as an inspection device


SIZE	LARGE V	SMALL V	ORDER NO.	PRICE
2-3/4 x 3-3/4 x 4	2" Cap	3/4" Cap	3100-155	\$94.80



Pittsburg® Hardened Steel Bevel Edge Square

BLADE	BEAM	ORDER NO.	PRICE
1-3/8"	1"	3100-040†	\$14.05
2-3/8"	1-3/8"	3100-042†	14.61
3-1/8"	2"	3100-044	19.61
5"	3"	3100-046	28.72
6-1/4"	4"	3100-048	31.10
8-1/2"	5-1/8"	3100-050	39.30
10-1/2"	6-3/8"	3100-052	68.84

† Limited Quantity



- Squares have accurate right angles both inside and outside
- Made from a single piece of fully seasoned tool steel
- Beams and blades are ground and accurately lapped for straightness and parallelism. Accuracy Class H.
- Beam is grooved at inner corner for clearance of burrs and dirt
- Packed in individual cartons

Pittsburg® Cylinder Squares



- Used on surface plates as a 90° reference angle. Used for checking squares, height gauges and many other instruments
- The squares are hardened and the ends are lapped to 90° angular accuracy with the cylinders as follows: 6" square to ± .00010, 12" square to ± .00015
- Includes fitted case

DIAM.	SQUARE HEIGHT	WEIGHT	ORDER NO.	PRICE
3"	6"	15 lbs	3100-130	\$143.59
4"	12"	44 lbs	3100-132	225.64

Fowler® Jack Stand Set

- Up to 1000 lbs. • Range: 2.25" to 3.375"
- Jack base diameter: 1.25" • 1" and 2" extension bases
- Extension may be combined

MODEL NO.	DESCRIPTION	PRICE
52-104-000	Jack Stand Set	\$25.65



Pittsburg® Ratchet Counter

- The counter is incremented by 1 when spring fitted ratchet type lever passes 45 degree threshold
- Reset knob

ORDER NO.	PRICE
3101-065	\$4.75



Measuring Instruments

Mitutoyo ¹²

Rectangular Gage Block Sets – Series 516



516-902-26



516-930-26

Inch					
ORDER NO.	BLOCKS PER SET	BLOCKS INCLUDED IN SET		GRADE	LIST PRICE
516-901-26	81	9 pcs.	.1001-.1009"	Step of .0001"	ASME 00 \$3960.00
516-902-26		49 pcs.	.101-.149"	Step of .001"	ASME 0 1970.00
516-903-26		19 pcs.	.05-.95"	Step of .05"	AS-1 1710.00
516-904-26		4 pcs.	1-4"	Step of 1"	AS-2 1550.00
516-913-26	35	1 pcs.	.10005"		ASME 00 1740.00
516-914-26		9 pcs.	.1001-.1009"	Step of .0001"	ASME 0 1040.00
516-915-26		9 pcs.	.101-.109"	Step of .001"	AS-1 916.00
516-916-26		10 pcs.	.10-.19"	Step of .01"	AS-2 776.00
		6 pcs.	.20, .30, .50, 1.0, 2.0 & 4.0"		

Thin Block Set: Steel

BLOCKS PER SET	BLOCKS INCLUDED IN SET	GRADE	ORDER NO.	LIST PRICE
10	.005-.050" Step of .005"	ASME 0	516-926-26	\$540.00

Set for Micrometer Inspection: Steel

9	.0625, .100, .125, .200, .250, .300, .500, 1, 2"	ASME 0	516-930-26	\$360.00
	1 pc. Optical parallel	AS-1	516-931-26	314.00

Square Gage Block Sets – Series 516

Inch					
BLOCKS PER SET	BLOCKS INCLUDED IN SET		GRADE	ORDER NO.	LIST PRICE
81	1 pc.	.050"	ASME 00	516-401-26	\$5070.00
	10 pcs.	.1000-.1009" Step of .0001"	ASME 0	516-402-26	2820.00
	49 pcs.	.101-.149" Step of .001"	AS-1	516-403-26	2520.00
	17 pcs.	.15-.95" Step of .05"	AS-2	516-404-26	1650.00
	4 pcs.	1-4" Step of 1"			
36	1 pc.	.050"	ASME 0	516-422-26	1330.00
	10 pcs.	.1000-.1009" Step of .0001"	AS-1	516-423-26	1190.00
	9 pcs.	.101-.109" Step of .001"	AS-2	516-424-26	692.00
	9 pcs.	.11-.19" Step of .01"			
	4 pcs.	.2-.5" Step of .1"			
	3 pcs.	1, 2 and 4"			

Pittsburg[®] Gage Block Sets Steel Sets

Steel sets are produced from a special steel of high carbon and chrome content with a hardness of 65RC which insures hard wear resistance and stability



Premium Series Sets

- These blocks are manufactured in a temperature controlled environment to ensure precise and reliable accuracy. They are made to special standards to resist corrosion and defacement.
- Mirror-polished surface finish provides exceptional wringing characteristics
- All inch blocks meet or exceed Federal Specification GGG-G-15C for flatness, parallelism, and size, and conform to MIL-STD-45662A and US Government spec. ASME B89.1.9.2002.
- All blocks are certified in the U.S. by an ISO 17025 Certified Lab.
- Each block is serialized for easy identification
- A complete certificate of calibration traceable to the National Institute of Standards and Technology (NIST), showing the deviation in millionths of each block. (This is provided with all grades – including Grade B.)
- Deluxe fitted wood case.
- A full one year guarantee against any defects in workmanship.

BLOCKS INCLUDED IN SETS:

81 pc. Sets come with:

- 9 Blocks .1001-.1009 in .0001 steps
- 49 Blocks .101-.149 in .001 steps
- 19 Blocks .050-.950 in .050 steps
- 4 Blocks 1"-4" in 1" steps

36 pc. Sets come with:

- 9 Blocks .1001-.1009 in .0001 steps
- 9 Blocks .101-.109 in .001 steps
- 9 Blocks .110-.190 in .010 steps
- 4 Blocks .200, .300, .400, .500
- 5 Blocks .050, .100, 1", 2", 4"

TOLERANCES:


Inch (U.S. Federal Standards), Millionths

	Grade 0 (A+)	Grade 1 (A & B)	Grade B (Shop)
<1"	+4/-2	+8/-4	+/-50
2"	+8/-4	+16/-8	+/-50
3"	+10/-5	+20/-10	+/-50
4"	+12/-6	+24/-12	+/-50

Steel Sets ²


NO.	PCS.	GRADE	TYPE	ORDER NO.	PRICE
81	0*	Rect.	3100-112	\$661.90	
81	1	Rect.	3100-113	477.50	
81	B	Rect.	3100-114	182.80	
36	0*	Rect.	3100-115	403.50	
81	1	Rect.	3100-116	279.60	
36	B	Rect.	3100-117	136.00	
81	0*	Square	3100-118	2036.20	
81	1	Square	3100-119	1503.60	
81	B	Square	3100-122	1032.10	
TUNGSTEN CARBIDE					
81	0	Rect.	3100-126	\$3777.80	

* Grade 0 (formerly Grade 2)



Pittsburg[®] Individual Gage Blocks

- All individual blocks are rectangular grade 0 (+.000004/-0.000002)
- Each block is supplied with a certificate showing the deviation in millionths

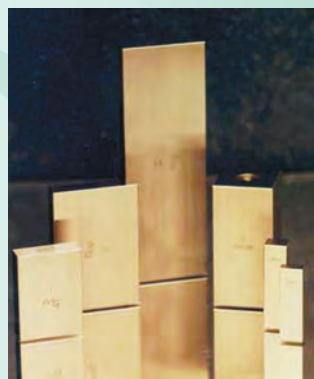

SIZE	ORDER NO.	PRICE	SIZE	ORDER NO.	PRICE	SIZE	ORDER NO.	PRICE	SIZE	ORDER NO.	PRICE
.050	3101-089	\$18.15	.112	3101-112	\$15.05	.134	3101-134	\$15.05	.450	3101-160	\$19.70
.100	3101-090	15.05	.113	3101-113	15.05	.135	3101-135	15.05	.500	3101-161	19.70
.1001	3101-091	15.05	.114	3101-114	15.05	.136	3101-136	15.05	.550	3101-162	19.70
.1002	3101-092	15.05	.115	3101-115	15.05	.137	3101-137	15.05	.600	3101-163	19.70
.1003	3101-093	15.05	.116	3101-116	15.05	.138	3101-138	15.05	.650	3101-164	19.70
.1004	3101-094	15.05	.117	3101-117	15.05	.139	3101-139	15.05	.700	3101-165	19.70
.1005	3101-095	15.05	.118	3101-118	15.05	.140	3101-140	15.05	.750	3101-166	21.80
.1006	3101-096	15.05	.119	3101-119	15.05	.141	3101-141	15.05	.800	3101-167	21.80
.1007	3101-097	15.05	.120	3101-120	15.05	.142	3101-142	15.05	.850	3101-168	21.80
.1008	3101-098	15.05	.121	3101-121	15.05	.143	3101-143	15.05	.900	3101-169	21.80
.1009	3101-099	15.05	.122	3101-122	15.05	.144	3101-144	15.05	.950	3101-170	21.80
.101	3101-101	15.05	.123	3101-123	15.05	.145	3101-145	15.05	1.000	3101-171	28.00
.102	3101-102	15.05	.124	3101-124	15.05	.146	3101-146	15.05	2.000	3101-172	31.65
.103	3101-103	15.05	.125	3101-125	15.05	.147	3101-147	15.05	3.000	3101-173	37.35
.104	3101-104	15.05	.126	3101-126	15.05	.148	3101-148	15.05	4.000	3101-174	52.90
.105	3101-105	15.05	.127	3101-127	15.05	.149	3101-149	15.05			
.106	3101-106	15.05	.128	3101-128	15.05	.150	3101-150	15.05			
.107	3101-107	15.05	.129	3101-129	15.05	.200	3101-155	18.15			
.108	3101-108	15.05	.130	3101-130	15.05	.250	3101-156	18.15			
.109	3101-109	15.05	.131	3101-131	15.05	.300	3101-157	18.15			
.110	3101-110	15.05	.132	3101-132	15.05	.350	3101-158	18.15			
.111	3101-111	15.05	.133	3101-133	15.05	.400	3101-159	18.15			

Measuring Instruments

Pittsburg[®] Economy Sets

- Competitively priced B grade set
- Each set is supplied with a certificate guaranteeing that each block is manufactured to meet or exceed Federal Specification GGG-G-15C, and is within the grade B tolerance of $\pm .000050$. This certificate does not show the individual deviation of each block.
- Each set is provided in a fitted wood case



81 pc.



36 pc.

NO.	PCS.	GRADE	TYPE	ORDER NO.	PRICE
81		B	Rect.	3100-125	\$133.35
36		B	Rect.	3100-120	101.60

Fowler

Economy Rectangular Steel Gage Block Sets

- Economy Grade.
- Each block certified to N.I.S.T.
- Tolerances to .00005"
- Complete with fitted wooden case.

MODEL NO.	DESCRIPTION	PRICE
53-672-036	36 piece	\$302.66
53-672-081	81 piece	427.81



53-672-036




53-672-081

Fowler Surface Gage with Built-In Switchable Magnetic Base

- Set Includes 3-1/8" x 2-1/16" per manent manetic base with on/off switch, fine adjustment on base and a 5/16" x 9" upright.
- .0005" test indicator (FOW# 52-562-778) with .040", .080" & .120" contact points.
- Swivel Clamp to mount indicator.
- Two dovetail stems: 5/32" & 3/8"
- 4" hardened scriber.
- Form fitted shop-hardened case for easy accessibility and storage.

OFF

ON



MODEL NUMBER	DESCRIPTION	PRICE
52-155-747	Surface Gage w/ Base	\$147.73

Mitutoyo Dial Gage Stands –

7003 (with Serrated Anvil)

7004 (with Flat Anvil)

The compact and versatile Dial Gage Stands are commonly use general-purpose stands for comparison measurements, 5" maximum-height capacity. Featuring a wide fine-adjusting range for zero-setting gage heads. The stands are designed for AGD type probes with 3/8" DIA. stems, and accommodate all AGD type Dial Indicators.

Dial Gage Stands

ORDER NO.	MAX. HEIGHT CAPACITY	FINE ADJUSTMENT	REMARKS	LIST PRICE
7001-10	4.0"	.04"	with Serrated Anvil (No. 101462)	\$554.00
7002-10	4.0"	.04"	with Flat Anvil (No. 101461)	554.00



12

Pittsburg[®] ALLEGHANY

Toolmaker's Surface Gages

- Hardened and ground base with V-groove for scribing cylindrical work
- Adjustable spindle arm and scribers can be rigidly locked into any position at any angle
- Recessed front allows for depressing spindle below base level

SPINDLES	ORDER NO.	PRICE
4" & 7"	3100-140	\$15.80
9" & 12"	3100-145	23.90



Mitutoyo

Granite Comparator Stands - Series 215

FEATURES

- Basic building-blocks for the assembly of special-purpose, precision measuring equipment.
- By mounting precision measuring instruments such as Digimatic indicators, Mu-Checker Cartridge Heads, and Linear Gages onto the stands, it is possible to handle all manner of measuring applications.
- The rigid granite base is free from burrs, pileups, rust, and deterioration over time.



12


ORDER NO.	BASE SIZE	COLUMN TRAVEL	STEM HOLE	REMARKS	LIST PRICE
215-151-10	150 x 200 x 50mm	250mm	ø8mm, ø9.53mm	w/ fine adj. of 1mm range	\$917.00
215-153-10	200 x 250 x 80mm	260mm	ø8mm, ø9.53mm	w/fine adj. of 1mm range	997.00
215-156-10	300 x 250 x 80mm	275mm	ø8mm, ø9.53mm, ø20mm	w/fine adj. over the entire travel -	1240.00

Pittsburg[®] ALLEGHANY

Granite Check Stand

- Top quality ebony granite base
- Extremely stable and durable
- Accepts all AGD indicators
- Fine adjustment knuckle on clamp
- Full 6" Square x 2" Thick Base
- 8" x .990" diam. column
- .00005" flatness

ORDER NO.	PRICE
3100-149	\$32.00



Measuring Instruments

Mitutoyo Magnetic Stands – Series 7

Accepts all AGD-type Dial Indicators, Test Indicators and Probes having 3/8" DIA. shank and/or Lug Back within 1/4" DIA. mounting hole. The On-Off Switch offers instant mounting and dismounting without any adverse effect to the indicators or work surface.

ORDER NO.	DESCRIPTION	CLAMPING FORCE	LIST PRICE
7010S	Magnetic Stand	600N	\$131.00
7011BN	Mag. Stand w/ fine Adjustment	600N	149.00
7012-10	Mag. Flexi-Stand for Dial Test Ind.	600N	202.00
7014E	Mini Mag. Stand w/o Magnet ON/OFF	-	87.50
7033B	Universal Mag. Stand w/Mech. Lock Sys.	600N	194.00

Magnetic Stand With Indicator Set

ORDER NO.	MODEL	DIAL INDICATOR	RANGE	GRADUATION	LIST PRICE
64PKA079	7010S	2416S	0-1"	.001"	\$227.00



Flexible Arm Magnetic Base

- Stem flexes nearly 360 degrees
- Locks into exact position with a cam lever-operated cable and tension adjustment.
- Stable rigidity will not diminish with constant use.
- On-Off lever control for magnetic base

DESCRIPTION	ORDER NO.	PRICE
Standard	3100-026	\$39.95
W/ Fine Adj	3100-028	42.95

w/Fine Adjustment



Flexible Indicator Holder

- Ideal for use in tight areas
- Solderless cable is self-adjustable
- Swivels and rotates – locks in any position
- Has fine adjustment 25 lb. pull
- Height with column 9-3/4"
- Base: 1-3/8" x 1-1/8" high pot magnet
- Stem: 13/64" x 3-1/8"

ORDER NO.	PRICE
3100-524	\$26.00



Magnetic Base Indicator Holder

Standard Holder:

- Full magnetic base
- 6" long x 1/4" diameter non-magnetic stainless steel holding rod, set in hardened universal ball socket, allowing universal positioning of the indicator
- Base dimensions: 3-1/2" x 1-1/8" x 1"

Universal Type Magnetic Base Indicator Holder:

- With attachments, this base can accommodate practically all types of dial and test indicators
- Unit has fine precision adjustment controlled by thumb screw allowing minor adjustments without touching work or indicator
- 6" long x 1/4" diameter non-magnetic stainless steel holding rod, set in hardened universal ball socket, allowing universal positioning of the indicator
- Base dimensions: 3-1/2" x 1-1/8" x 1"



ORDER NO.	PRICE
Magnetic Base Indicator Holder	3100-036 \$23.15
Universal Type	3100-038 28.00



7011BN



64PKA079



Magnetic Bases

- Powerful 110 lb. vibration free magnetic pull on Standard and Fine Adjustment models.
- Holding power for Heavy Duty model is 175 lbs!
- Centered "V" magnet for a strong hold on round or flat surfaces
- On and Off lever control for easy surface removal. Prevents marring or scratching.
- Accepts all AGD Dial Indicators with lug backs
- Quick adjustment clamping

DESCRIPTION	ORDER NO.	PRICE
Standard	3100-020	\$18.15
W/ Fine Adj	3100-022	19.50
Heavy Duty	3100-024	39.95



Standard

Fine Adjustment



Universal Dial Test Indicator Holder

- For Bridgeport type machines, milling machines, and jig borers
- Clamping diameter 1-7/8"
- Length from clamping bracket to indicator 4-1/2"
- Suitable for all popular indicators with 5/32" shank or dovetail
- Does not disturb the working tool
- Mounts with single pressure screw directly on the machine quill, bypassing the working tool
- A quicker way of indicating; guaranteed accurate readings



ORDER NO.	PRICE
3100-520	\$18.45



Universal Magnetic Indicator Holder

- Two universal ball sockets permit adjustment to any angle or position, with full 360 degree movement.
- Fine adjustment clamp.
- Dovetail clamp for test indicator.
- 1/4" hole for 1/4" stem indicator.
- All knurled knobs and lock screws.

Indicator not included

ORDER NO.	PRICE
3100-522	\$23.65



Magnetic Base

- Five locations for mounting accessories
- 45 lbs holding power
- Zinc die cast housing
- Approximate size: 4-1/2" x 1-1/4"



Anyform Magnetic Base

STANDARD ANYFORM FEATURES:

- Powerful, permanent magnet always stays on
- Cam Lock Mechanism easily loosens the segments for contour adjustment
- Available with standard, fine adjust, or flexible arms and clamps
- Made in USA under strict quality control
- One year warranty

ON/OFF ANYFORM FEATURES:

- Rotary knob turns power on or off
- Permanent, powerful magnet
- Cam Lock Mechanism easily loosens the segments for contour adjustment
- Available with standard, fine adjust, or flexible arms and clamps
- Made in USA under strict quality control
- One year warranty



CLOSEOUT ITEM!

STANDARD ANYFORM	ORDER NO.	PRICE
ANYFORM magnetic base with standard arms and clamps	3100-535	\$36.50
ANYFORM magnetic base with fine adjust arms and clamps	3100-536	45.00
ANYFORM magnetic base with flexible arm	3100-537	64.20

ON-OFF ANYFORM	ORDER NO.	PRICE
ON/OFF ANYFORM magnetic base with flexible arm	3100-540	\$77.15

Measuring Instruments

Mitutoyo

Bench Centers – Series 967 Precision Concentricity Verification



ORDER NO.	CENTER-TO-CENTER	WORKPIECE CAPACITY DIAMETER	MAX. WEIGHT	PARALLEL-ISM OF CENTERS	FLATNESS OF SURFACE	ATTACHMENT DIAMETER	LIST PRICE
967-203-10	5.9"	3.8"	17.5 lbs.	.0002"	.0004"	Ø3/8"	\$727.00
967-201-10	11.8"	5.8"	35 lbs.	.0002"	.0006"	Ø3/8"	1310.00
967-204-10	17.7"	7.8"	44 lbs.	.0002"	.0007"	Ø3/8"	2010.00
967-202-10	23.6"	9.8"	66 lbs.	.00024"	.0008"	Ø3/8"	3020.00

Mitutoyo

Surftest SJ-210 Surface Roughness Testers

FEATURES

- Portable, detachable, detector/drive unit evaluate 39 surface parameters.
- The large backlit color LCD display direction is change-able and also displays the evaluation curve.
- A micro-SD card will hold up to 10,000 results. USB, RS-232 and SPC output.
- Display with detachable drive unit is supported.
- Rechargeable battery provides up to 1000 measurements before recharging.
- Includes a precision roughness specimen.



ORDER NO.	DESCRIPTION	LIST PRICE
178-561-02A	SJ-210 Surftest	\$2430.00

Mitutoyo

Quill Kit Easy Installation — Fits Most Vertical Knee Mills

FEATURES

- Easy to read LCD with resolution of .0005"/0.01mm.
- Push button controls for inch/mm, Zero-Set and On/Off.
- Powered by a single SR-44 Battery which lasts about 1 year with normal use.
- SPC output for data transmission to Data Processors or LED Remote Display Box.



DESCRIPTION	ORDER NO.	LIST PRICE
Digimatic Quill Kit complete with brackets & scale for Bridgeport Type machines.	053906B	\$310.00

Mitutoyo Digital Readout/DRO Packages 2-Axis/3-Axis Travels



2 Axis, KA Counter Milling System

Package Includes: • KA Counter • Brackets for Linear Scales • AT715 Electro-Magnetic Linear Scales • Display Arm Kit

X AXIS TRAVEL	Y AXIS TRAVEL			
	12" (539-805)	14" (539-806)	16" (539-806)	18" (539-808)
30" (539-814)	64PKA058A \$1490.00	64PKA060A \$1490.00		
36" (539-816)	64PKA059A \$1490.00		64PKA062A \$1490.00	
40" (539-817)		64PKA061A \$1490.00	64PKA063A \$1490.00	64PKA064A \$1490.00

3 Axis Milling Package

ORDER NO.	DESCRIPTION - 3 AXIS MILLING PACKAGE	LIST PRICE
64PKA065A	ABS Scales, 12' x 30" x 6", w/3 Axis KA Counter (174-175A)	\$2220.00
64PKA066A	ABS Scales, 12' x 36" x 6", w/3 Axis KA Counter (174-175A)	2220.00
64PKA067A	ABS Scales, 16' x 36" x 6", w/3 Axis KA Counter (174-175A)	2220.00

2 Axis Lathe Package

Package Includes: • KA Counter • Mounting Bracket Kit • Counter Tray • AT116 & AT715 Linear Scale combinations (w/cables) • Additional 2M Extension Cable (60", 72" pkgs.)

Z AXIS TRAVEL	X AXIS TRAVEL (AT 116 SLIM GLASS SCALE)					
	6" (539-272-30)	8" (539-273-30)	10" (539-274-30)	12" (539-275-30)	14" (539-276-30)	16" (539-276-30)
28" (539-813)	64PKA035A \$1450.00					
30" (539-814)	64PKA036A \$1450.00					
36" (539-816)	64PKA037A \$1450.00					
40" (539-817)	64PKA038A \$1450.00	64PKA039A \$1450.00	64PKA042A \$1450.00	64PKA046A \$1450.00	64PKA052A \$1450.00	
44" (539-818)		64PKA040A \$1450.00	64PKA043A \$1450.00	64PKA047A \$1450.00	64PKA053A \$1450.00	
48" (539-819)		64PKA041A \$1450.00	64PKA044A \$1450.00	64PKA048A \$1450.00	64PKA054A \$1450.00	
52" (539-820)				64PKA049A \$1450.00	64PKA055A \$1450.00	
60" (539-822)			64PKA045A \$1650.00	64PKA050A \$1650.00	64PKA056A \$1650.00	64PKA057A \$1650.00
72" (539-825)				64PKA051A \$1650.00		

2 Axis, KA Counter Grinder System

Package Includes: • KA Counter • Mounting Bracket Kit • AT116 Glass Linear Scales • Display Arm Kit

VERTICAL	CROSS SIDE (AT116 SLIM GLASS SCALE)			
	6" (539-272-30)	8" (539-273-30)	10" (539-274-30)	12" (539-275-30)
12" (539-275-30)	64PKA026A \$1620.00	64PKA028A \$1620.00		
14" (539-276-30)	64PKA027A \$1620.00	64PKA029A \$1620.00		
16" (539-277-30)		64PKA030A \$1620.00		
18" (539-278-30)			64PKA031A \$1620.00	64PKA033A \$1620.00
20" (539-279-30)				64PKA034A \$1620.00
24" (539-281-30)			64PKA032A \$1620.00	